

**Transmission and Multiplexing (TM);  
Access networks;  
Spectral management on metallic access networks;  
Part 1: Definitions and signal library**

---



---

Reference

RTR/TM-06029

---

Keywords

access, ADSL, HDSL, ISDN, local loop, modem,  
network, POTS, SDSL, spectral management,  
transmission, unbundling, VDSL, xDSL

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

[editor@etsi.org](mailto:editor@etsi.org)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2002.  
All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup> and **UMTS**<sup>TM</sup> are Trade Marks of ETSI registered for the benefit of its Members.  
**TIPHON**<sup>TM</sup> and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.  
**3GPP**<sup>TM</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

# Contents

Intellectual Property Rights .....	6
Foreword.....	6
1 Scope .....	7
2 References .....	7
3 Definitions and abbreviations.....	9
3.1 Definitions .....	9
3.2 Abbreviations .....	10
4 The technical purpose of Spectral Management .....	10
4.1 Bounding spectral pollution .....	11
4.2 The individual components of spectral pollution .....	11
5 Reference model of the local loop wiring .....	12
5.1 The concept of ports; interfaces to the Local Loop Wiring .....	13
5.2 Bounding spectral pollution by limiting signals at the ports .....	13
5.3 Reference model.....	14
6 Minimum set of characteristics for signal descriptions .....	15
7 Cluster 0 signals (DC power feeding) .....	15
7.1 "Class A" TNV power feeding (from the LT-port) .....	15
7.1.1 "Class B" RFT power feeding (from the LT-port).....	15
8 Cluster 1 signals (voice band) .....	16
8.1 "POTS" signals (voice band lines 300 Hz to 3 400 Hz) .....	16
8.1.1 Total signal voltage.....	16
8.1.2 Peak amplitude.....	16
8.1.3 Narrow-band signal voltage.....	16
8.1.4 Unbalance about earth .....	18
8.1.5 Feeding power (from the LT-port).....	19
8.1.6 Reference impedance $Z_R$ .....	19
8.1.7 Ringing signal .....	19
8.1.8 Metering signals.....	20
9 Cluster 2 signals (semi broad band) .....	20
9.1 "ISDN.2B1Q" signals.....	20
9.1.1 Total signal power .....	20
9.1.2 Peak amplitude.....	20
9.1.3 Narrow-band signal power.....	20
9.1.4 Unbalance about earth .....	21
9.1.5 Feeding power (from the LT-port).....	22
9.2 "ISDN.MMS.43" signals .....	23
9.2.1 Total signal power .....	23
9.2.2 Peak amplitude.....	23
9.2.3 Narrow-band signal power.....	23
9.2.4 Unbalance about earth .....	24
9.2.5 Feeding power (from the LT-port).....	25
9.3 "Proprietary.SymDSL.CAP.QAM" signals.....	26
9.3.1 Total signal power .....	26
9.3.2 Peak amplitude.....	26
9.3.3 Narrow-band signal power (NBSP).....	26
9.3.4 Unbalance about earth .....	27
10 Cluster 3 signals (symmetrical broad band) .....	28
10.1 "HDSL.2B1Q/3" signals (392 kbaud leased lines).....	28
10.1.1 Total signal power .....	28
10.1.2 Peak amplitude.....	29

10.1.3	Narrow-band signal power.....	29
10.1.4	Unbalance about earth .....	30
10.1.5	Feeding power (from the LT-port).....	31
10.2	"HDSL.2B1Q/2" signals (584 kbaud leased lines).....	31
10.2.1	Total signal power .....	31
10.2.2	Peak amplitude.....	31
10.2.3	Narrow-band signal power.....	31
10.2.4	Unbalance about earth .....	32
10.2.5	Feeding power (from the LT-port).....	33
10.3	"HDSL.2B1Q/1" signals (1 160 kbaud leased lines).....	33
10.3.1	Total signal power .....	33
10.3.2	Peak amplitude.....	34
10.3.3	Narrow-band signal power.....	34
10.3.4	Unbalance about earth .....	35
10.3.5	Feeding power (from the LT-port).....	36
10.4	"HDSL.CAP/2" signals .....	36
10.4.1	Total signal power .....	36
10.4.2	Peak amplitude.....	36
10.4.3	Narrow-Band Signal Power (NBSP).....	36
10.4.4	Unbalance about earth .....	37
10.4.5	Feeding power (from the LT-port).....	38
10.5	"SDSL::Fn" signals .....	39
10.5.1	Total signal power .....	39
10.5.2	Peak amplitude.....	40
10.5.3	Narrow-band signal power (NBSP).....	40
10.5.4	Unbalance about earth .....	41
10.5.5	Feeding power (from the LT-port).....	42
10.6	"SDSL.asym::Fn" signals .....	43
10.6.1	Total signal power .....	43
10.6.2	Peak amplitude.....	44
10.6.3	Narrow-band signal power (upstream only) .....	44
10.6.4	Narrow-band signal power (downstream only).....	46
10.6.5	Unbalance about earth .....	47
10.6.6	Feeding power (from the LT-port).....	47
10.7	"Proprietary.SymDSL.CAP.A::Fn" signals.....	48
10.7.1	Total signal power .....	48
10.7.2	Peak amplitude.....	48
10.7.3	Narrow-band signal power (NBSP).....	49
10.7.4	Unbalance about earth .....	50
10.8	"Proprietary.SymDSL.CAP.B::Fn" signals .....	51
10.8.1	Total signal power .....	51
10.8.2	Peak amplitude.....	51
10.8.3	Narrow-band signal power (NBSP).....	52
10.8.4	Unbalance about earth .....	53
10.9	"Proprietary.SymDSL.CAP.C::Fn" signals .....	54
10.9.1	Total signal power .....	54
10.9.2	Peak amplitude.....	54
10.9.3	Narrow-Band Signal Power (NBSP).....	54
10.9.4	Unbalance about earth .....	56
10.10	"Proprietary.SymDSL.PAM::Fn" signals.....	57
10.10.1	Total signal power .....	57
10.10.2	Peak amplitude.....	58
10.10.3	Narrow-Band Signal Power (NBSP).....	58
10.10.4	Unbalance about earth .....	59
10.10.5	Feeding power (from the LT-port).....	60
10.11	"Proprietary.SymDSL.2B1Q::Fn" signals.....	61
10.11.1	Total signal power .....	61
10.11.2	Peak amplitude.....	61
10.11.3	Narrow-Band Signal Power (NBSP).....	61
10.11.4	Unbalance about earth .....	63
10.11.5	Feeding power (from the LT-port).....	64
10.12	"Proprietary.PCM.HDB3.2M.SR" signals.....	64

10.12.1	Total signal power .....	64
10.12.2	Peak amplitude.....	65
10.12.3	Narrow-band signal power.....	65
10.12.4	Unbalance about earth .....	66
10.12.5	Feeding power (from the LT-port).....	67
10.13	"Proprietary.PCM.HDB3.2M.SQ" signals .....	67
10.13.1	Total signal power .....	67
10.13.2	Peak amplitude.....	67
10.13.3	Narrow band signal power.....	67
10.13.4	Unbalance about earth .....	68
11	Cluster 4 signals (asymmetrical broad band) .....	68
11.1	"ADSL over POTS" signals (EC).....	69
11.1.1	Total signal power (downstream only) .....	69
11.1.2	Total signal power (upstream only) .....	69
11.1.3	Peak amplitude (upstream and downstream) .....	69
11.1.4	Narrow-band signal power (downstream only).....	69
11.1.5	Narrow-band signal power (upstream only) .....	71
11.1.6	Unbalance about earth (upstream and downstream) .....	72
11.2	"ADSL.FDD over POTS" signals .....	73
11.2.1	Total signal power (downstream only) .....	73
11.2.2	Total signal power (upstream only) .....	73
11.2.3	Peak amplitude (upstream and downstream) .....	74
11.2.4	Narrow-band signal power (downstream only).....	74
11.2.5	Narrow-band signal power (upstream only) .....	75
11.2.6	Unbalance about earth (upstream and downstream) .....	75
11.3	"ADSL over ISDN" signals (EC).....	75
11.3.1	Total signal power (downstream only) .....	76
11.3.2	Total signal power (upstream only) .....	76
11.3.3	Peak amplitude (upstream and downstream) .....	76
11.3.4	Narrow-band signal power (downstream only).....	76
11.3.5	Narrow-band signal power (upstream only) .....	78
11.3.6	Unbalance about earth (upstream and downstream) .....	79
11.4	"ADSL.FDD over ISDN" signals .....	80
11.4.1	Total signal power (downstream only) .....	80
11.4.2	Total signal power (upstream only) .....	80
11.4.3	Peak amplitude (upstream and downstream) .....	81
11.4.4	Narrow-band signal power (downstream only).....	81
11.4.5	Narrow-band signal power (upstream only) .....	82
11.4.6	Unbalance about earth (upstream and downstream) .....	82
11.5	Other members of the ADSL family .....	82
11.5.1	ADL derived from "ADSL over POTS" signals .....	82
11.5.2	ADL derived from "ADSL over ISDN" signals .....	83
12	Cluster 5 signals (broadband up to 30 MHz).....	83
12.1	"VDSL" Signals .....	83
13	Measurement methods of signal parameters .....	83
13.1	Peak amplitude .....	83
13.2	Narrow-band signal power (voltage).....	83
13.3	Unbalance about earth .....	83
13.3.1	Definition of earth.....	84
13.3.2	Transmitter Balance - LOV .....	84
13.3.3	Receiver balance - LCL .....	85
<b>Annex A:</b>	<b>Bibliography.....</b>	<b>86</b>
History .....		87

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

All published ETSI deliverables shall include information which directs the reader to the above source of information.

---

## Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Transmission and Multiplexing (TM).

The present document is part 1 of a multi-part deliverable covering Transmission and Multiplexing (TM); Access networks; Spectral management on metallic access networks, as identified below:

- Part 1: **"Definitions and signal library"**;
- Part 2: "Technical methods for performance evaluations";
- Part 3: "Construction Methods for Spectral Management Rules".

NOTE: Parts 2 and 3 are under preparation.

---

# 1 Scope

The present document gives guidance on a common language for Spectral Management specifications. It provides a first set of definitions on Spectral Management quantities, including:

- a) a description of the technical purpose of Spectral Management;
- b) a common reference model to identify LT-ports, NT-ports, upstream, downstream, etc.;
- c) a minimum set of characteristics necessary to describe signals within the context of Spectral Management; and
- d) an informative library of electrical signals that may flow into the ports of a metallic access network.

The present document is applicable to simplify and harmonize the description of *network specific* Spectral Management documents. The objective is to be a clear reference for these documents, without making any specific choice on the technology mix that may use the access network. Network-specific documents, that rule the selected penetration limits and technology mix for Spectral Management purposes, can be kept compact by referring to the definitions in the present document.

The informative library of signal definitions is organized in clusters of signal categories. Each category defines, independent from other categories, a full set of signal limits between DC and 30 MHz. These categories are dominantly based on transmission equipment standards from ETSI, ITU and ANSI (existing or in progress), and on the technical understanding of additional requirements to protect future technology. When these definitions are incomplete or not appropriated, *network specific* spectral management documents may use additional definitions.

The characteristics of each signal described in this signal library identify their absolute maximum (or minimum) values. They fully account for the spread in their actual value, unless this tolerance is explicitly specified. This means in practice that when a power limit of a signal category is specified by a single number (for instance 14 dBm), it refers to its nominal maximum power plus its tolerance (for instance  $+13,5 \text{ dBm} \pm 0,5 \text{ dBm}$ ). This approach provides clear criteria to determine if a signal under test is compliant or not with a signal category from this library.

The intention of the present document is to present a set of signal descriptions from various sources collected into a single document. Some of the descriptions have their origin in xDSL related ETSI and ITU publications and some are completely new. Detailed references have been included where applicable.

Due to differences in the way these signals are described in the different sources, the description has been harmonized into a uniform format. This enables a unified signal specification method for spectral management purposes. It should be noted that, although this unification has been carried out with the best intentions, and with the best knowledge available, some content of the original source document may not have been correctly interpreted or copied into this document.

In the case of discrepancies between a signal description in the present document and the original source document(s), the source(s) should be regarded as definitive. Therefore the content of the present document should be regarded as informative.

---

# 2 References

For the purposes of this Technical Report (TR) the following references apply:

## POTS & ANALOGUE

- [1] ETSI TBR 021 (1998): "Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signalling".
- [2] ETSI ES 201 970 (V1.1.1): "Access and Terminals (AT); Public Switched Telephone Network (PSTN); Harmonized specification of physical and electrical characteristics at a 2-wire analogue presented Network Termination Point (NTP)".

- [3] ETSI EN 300 001 (V1.5.1): "Attachments to the Public Switched Telephone Network (PSTN); General technical requirements for equipment connected to an analogue subscriber interface in the PSTN".
- [4] ETSI EN 300 450 (V1.2.1): "Access and Terminals (AT); Ordinary and Special quality voice bandwidth 2-wire analogue leased lines (A2O and A2S); Terminal equipment interface".
- [5] ETSI EN 300 453 (V1.2.1): " Access and Terminals (AT); Ordinary and Special quality voice bandwidth 4-wire analogue leased lines (A4O and A4S); Terminal equipment interface".

#### ISDN

- [6] ETSI TS 102 080 (V1.3.2): "Transmission and Multiplexing (TM); Integrated Services Digital Network (ISDN) basic rate access; Digital transmission system on metallic local lines".

#### HDSL

- [7] ETSI TS 101 135 (V1.5.3): "Transmission and Multiplexing (TM); High bit-rate Digital Subscriber Line (HDSL) transmission systems on metallic local lines; HDSL core specification and applications for combined ISDN-BA and 2 048 kbit/s transmission".

#### SDSL

- [8] ETSI TS 101 524 ( V1.1.3): "Transmission and Multiplexing (TM); Access transmission system on metallic access cables; Symmetrical single pair high bitrate Digital Subscriber Line (SDSL)".
- [9] ITU-T Recommendation G.991.2 (2001): "Single-Pair High-Speed Digital Subscriber Line (SHDSL) transceivers".

#### ADSL

- [10] ETSI TS 101 388 (V1.3.1): "Transmission and Multiplexing (TM); Access transmission systems on metallic access cables; Asymmetric Digital Subscriber Line (ADSL) - European specific requirements [ITU-T Recommendation G.992.1 modified]".
- [11] ANSI T1.413 (1998): "Network to Customer Installation Interfaces - Asymmetric Digital Subscriber Line (ADSL) Metallic Interface".
- [12] ITU-T Recommendation G.992.1 (1999): "Asymmetric digital subscriber line (ADSL) transceivers".

#### VDSL

- [13] ETSI TS 101 270-1 (V1.2.1): "Transmission and Multiplexing (TM); Access transmission systems on metallic access cables; Very high speed Digital Subscriber Line (VDSL); Part 1: Functional requirements".
- [14] ANSI T1.424 (2002): "Interface Between Networks and Customer Installations - Very-high Speed Digital Subscriber Lines (VDSL) Metallic Interface (Trial-Use Standard)".

#### EMC & UNBALANCE

- [15] ITU-T Recommendation O.9 (1999): "Measuring arrangements to assess the degree of unbalance about earth".
- [16] ITU-T Recommendation G.117 (1996): "Transmission aspects of unbalance about earth".

#### VARIOUS

- [17] EN 60950: "Safety of information technology equipment".
- [18] ETSI EG 201 212 (V1.2.1): "Electrical safety; Classification of interfaces for equipment to be connected to telecommunication networks".



- [19] ITU-T Recommendation K.50: "Safe limits of operating voltages and currents for telecommunication systems powered over the network".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**access rule** (or metallic access rule): mandatory rule for achieving access to the local loop wiring, equal for all network operators making use of the same network cable, that bounds the crosstalk in that network cable

**degree of penetration, or cable fill:** number and mixture of connected transmission techniques to the ports of a binder or cable bundle that inject signals into the access network

**deployment rule:** voluntary rule, irrelevant for achieving access to the local loop wiring and proprietary for each individual *network operator*

NOTE: A deployment rule reflects a network operators own view about what the maximum length or maximum bitrate may be for offering a specific transmission service to ensure a chosen minimum quality of service.

**downstream transmission:** transmission direction from an LT-port to an NT-port, usually from the telecommunication exchange via the access network, to the customer premises

**EC:** The abbreviation EC normally means Echo Cancelled. However, within the context of ADSL this abbreviation is used to designate ADSL systems with spectral overlap of downstream over upstream. In this context, the usage of the abbreviation "EC" was only kept for historical reasons. The usage of the echo cancelling technology is not only limited to spectrally overlapped systems, but can also be used by FDD systems.

**Line Termination Port (LT-port):** port between network transmission equipment and the twisted pair access network, which is labelled by the loop provider as "LT-port". Such a port is commonly located near the telecommunication exchange

**loop provider:** company facilitating access to the local loop wiring

NOTE: In several cases the loop provider is historically connected to the incumbent network operator, but other companies may serve as loop provider as well.

**network operator:** company that makes use of a local loop wiring for transporting telecommunication services

NOTE: This definition covers *incumbent* as well as *competitive* network operators.

**Network Termination Port (NT-port):** port between network transmission equipment and the twisted pair access network, which is labelled by the loop provider as "NT-port". Such a port is commonly located at the customer premises

**transmission equipment:** equipment connected to the access network that uses a transmission technique to transport information

**transmission technique:** electrical technique used for the transportation of information over electrical wiring

**upstream transmission:** transmission direction from an NT-port to an LT-port, usually from the customer premises, via the access network, to the telecommunication exchange

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ADSL	Asymmetric Digital Subscriber Line
CAP	Carrierless Amplitude/Phase modulation
CSS	Customer-side Signal Source
DC	Direct Current
EC	Echo Cancelled (see also under EC, in clause 3.1 on definitions)
EMC	Electro-Magnetic Compatibility
ESS	Exchange-side Signal Source
FDD	Frequency Division Duplexing/Duplexed
FEXT	Far End CrossTalk
HDSL	High bit rate Digital Subscriber Line
ISDN	Integrated Services Digital Network
ISDN-BA	ISDN Basic Access
LCL	Longitudinal Conversion Loss
LLW	Local Loop Wiring
LOV	Longitudinal Output Voltage
LT-port	Line Termination port
MDF	Main Distribution Frame
NBSP	Narrow-Band Signal Power
NBSV	Narrow-Band Signal Voltage
NEXT	Near End CrossTalk
NT-port	Network Termination port
PAM	Pulse Amplitude Modulation
PCM	Pulse Code Modulation
POTS	Plain Old Telephony Services
PSD	Power Spectral Density
PSTN	Public Switched Telephone Network
RFT	Remote Feeding Telecommunication
RSS	Remote Signal Sources
SDSL	Symmetrical (single pair high bitrate) Digital Subscriber Line
TBR	Technical Basis for Regulation
TC-PAM	Trellis Coded PAM
UC-PAM	Ungerboeck Coded PAM
VDSL	Very-high-speed Digital Subscriber Line
xDSL	(all systems) Digital Subscriber Line

---

## 4 The technical purpose of Spectral Management

Connecting a signal to a wire pair of a (metallic) access network cable causes that parts of that signal couple to other wire pairs in the same cable bundle or binder group. Connecting more systems to the same cable will increase the total crosstalk noise level in each wire-pair, and disturbs systems that were already installed.

Existing access network cables are designed to facilitate a low crosstalk coupling at low frequencies (telephony band), but the frequency of signals in cables increases substantially due to the introduction of broadband transmission systems. The consequence will be a substantially increase of the total crosstalk noise power in each wire pair.

Existing transmission systems are designed to cope (to some extend) with this type of impairment, but impairment puts anyhow a limit on the capacity of what can be transported through that cable. Capacity means here the maximum bitrate that can be transported over a single wire-pair at given cable length, or the maximum length that can be reached at given bitrate. Above some impairment level, the reliability of installed systems becomes poor, and they will even fail when the impairment level is increased further.

Usually, systems are designed to function optimally when they are only impaired by identical systems (self-crosstalk) that use other wire-pairs in the same cable. In practice, it is quite common to mix different transmission technologies in one cable. This may cause some degradation of transmission capacity, compared to the above-mentioned idealized situation:

- if this degradation is minor, the technology mix is referred to as *compatible*;
- if this degradation is acceptable, the technology mix is referred to as *near-compatible*;
- if this degradation is not acceptable, the technology mix is referred to as *incompatible*.

To prevent that only a few systems make an inefficient use of the access network, at the cost of all the others, measures have to be taken. This is referred to as "Spectral Management".

## 4.1 Bounding spectral pollution

The objective for *spectral management* is to control the maximum spectral pollution, to enable an efficient use of the access network for all connected systems. This can be achieved by focussing on the use of near-compatible systems in the *same cable* or cable bundle.

Spectral management is an issue for both the loop provider and the network operators (in some cases they are within the same organization).

- The best that a loop provider can do to help the network operator(s) on its network, is to bound the spectral pollution in its network. This can be achieved by putting limits on signals (levels, spectra), diversity (technology mix) and penetration (number of systems). These limits may be dependent on the loop length. Defining relevant limits at the boundaries (or ports) of the access network is the most appropriate approach. This approach is not restricted to situations where more than one licence operator make use of the same binders or cable bundles; it is also essential when one operator mixes different broadband technologies into one binder or cable bundle.
- The best that *network operators* can do is making estimates of the maximum impairment level in a wire-pair, and define adequate deployment rules. Deployment rules define the maximum reach or bitrate for a given transmission technology, with "sufficient" noise margin (according to the network operator). Since the crosstalk coupling between the wire pairs in binders or cable bundles is only known by a very rough approximation, the maximum impairment level is also only known by a very rough estimate. In other words: the definition of adequate limits is an essential requirement for successful deployment rules, but it can never *guarantee* that deployment rules can be adequate under all conditions. It is an inconvenience, which each network operator has to face.

The present document provides an informative library of signal categories, to simplify spectral management specifications that bound the spectral pollution of a network. Guidelines for deployment rules are beyond the scope of the present document. A spectral management specification of a possible length dependency of the signal limits is also beyond the scope of the present document.

## 4.2 The individual components of spectral pollution


Defining adequate rules for controlling spectral pollution requires a technical understanding of how individual disturbers contribute to the total impairment. The crosstalk coupling functions and the attenuation characteristics of an existing access network are fixed and from an electrical point of view the network can be considered as a closed entity. Controlling the spectral pollution is therefore restricted to controlling what signals may, and may not, flow into the access network cables.

Figure 1 illustrates the impact of these cable characteristics on the transmission. Transceiver TR1.LT sends information to TR1.NT.

- Receiver TR1.NT receives the downstream signal from transmitter TR1.LT that has been attenuated by the insertion loss of the wire-pair.
- In addition, TR1.NT receives crosstalk noise through the NEXT coupling function (near end crosstalk), from the upstream signal transmitted by TR2.NT.

- In addition, TR1.NT receives crosstalk noise through the FEXT coupling function (far end crosstalk), from the downstream signal transmitted by TR2.LT.

This crosstalk noise deteriorates the signal to noise ratio of the received signal, and therefore the performance of the transmission between TR1.LT and TR1.NT.

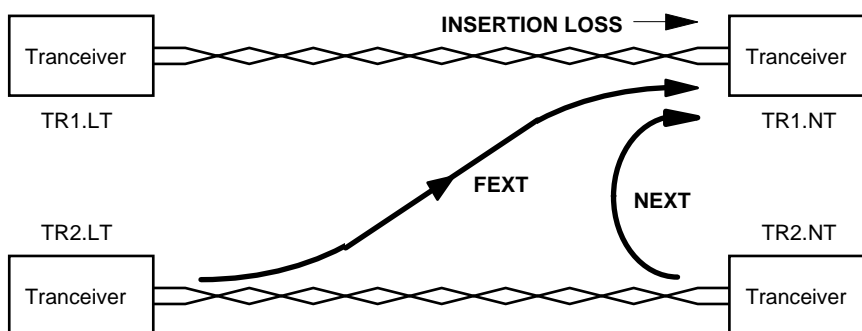

**Figure 1: Various crosstalk paths**

Crosstalk and attenuation characteristics are frequency dependent. Because of the differences in crosstalk coupling at the near and the far end, the relation between frequency allocation and sending direction is of major importance for the management of the crosstalk noise.

The crosstalk coupling to the far end of the transmitter (FEXT) is relatively low due to the attenuation. The crosstalk on the near end (NEXT) will be relatively high. So if the transmitter and the receiver at one end of the line would use the same frequency band, the transmitter outputs should be limited in order not to disturb the adjacent receivers. The result would be that the achievable wire-pair length would be limited because crosstalk limits the maximum allowed sending level. By using different frequency bands for transmitters and receivers at one end of the binder or cable bundle, this effect can be eliminated and the achievable length will increase.

NOTE 1: Some systems, such as FDD-based ADSL, take advantage from allocating different frequency bands for transmitting signals in upstream and downstream direction. By using spectra that are only partly overlapped (EC systems), or not overlapped at all (FDD-systems), the NEXT between these systems can be reduced significantly. Ideally, if there is no spectral overlap between up and downstream signals, and the binder or cable bundle is only filled with these systems, the transmission performance becomes FEXT-limited only since all NEXT has been eliminated.

NOTE 2: Consider the example of FEXT-limited ADSL: the NEXT at the NT due to neighbouring HDSL systems can limit the ADSL downstream performance. By restricting the deployment distance of HDSL, the NEXT disturbance at the NT of longer ADSL lines will be attenuated by the extra cable length, increasing the ADSL capacity (or reach for a given capacity). It follows that the deployment range limit of HDSL systems has an impact on the deployment range limit of ADSL. This example shows that it may be desirable to make the specifications for the signal limits dependent on the loop length.

## 5 Reference model of the local loop wiring

This clause describes the reference model of the *local loop wiring* of an access network, from a spectral management point of view. It illustrates that local loop cable sections are asymmetrical in nature, because equipment near the local exchange side may differ from equipment near the customer side.

The Local Loop Wiring (LLW) of an access network includes mainly cables, but may also include a Main Distribution Frame (MDF), street cabinets, and other distribution elements.

From a Spectral Management point of view, signal sources are identified on their location:

- CSS: Customer-side Signal Sources.
- ESS: Exchange-side Signal Sources (such as local exchanges).
- RSS: Remote Signal Sources (such as repeaters and optical network units in street cabinets).

## 5.1 The concept of ports; interfaces to the Local Loop Wiring

To give signal sources access to the Local Loop Wiring, their signals enter the LLW by flowing through so-called "ports". The ports are the interfaces to the Local Loop Wiring, and should therefore be well identified.

The following port-types are defined in this reference model:

- **LT-port**: the Line Termination port is generally used for connecting an ESS to the LLW.
- **NT-port**: the Network Termination port is generally used for connecting a CSS to the LLW.
- **LT.cab-port**: the LT-cabinet port is generally used for connecting an RSS to the LLW that links this port with an NT-port (or NT.cab-port) elsewhere in the LLW.
- **NT.cab-port**: the NT-cabinet port is generally used for connecting an RSS to the LLW that links this port with an LT-port (or LT.cab-port) elsewhere in the LLW.

At least two ports are required for communication. In special cases where access to the LLW at additional *well-identified* ports (such as in street cabinets) is provided for remote active devices (such as repeaters and optical network units), more ports may be involved.

## 5.2 Bounding spectral pollution by limiting signals at the ports

The signal limits that are summarized in the present document are to limit injected signals as they can be observed at the ports of the LLW.

The signals that many DSL systems generate are asymmetrical in nature. For instance ADSL systems generate different data signals in different transmission directions. ISDN and HDSL systems are symmetrical in their data signals, but their remote DC power feeding is asymmetrical. Therefore different port names are used in the Reference Model to simplify the description of signal limits that are transmission direction dependent.

NOTE 1: Reversing the transmission direction is generally not recommended, and may be implicitly forbidden by asymmetric signal limits at the ports. For example, ADSL systems are designed to maximize self-compatibility when all "downstream" signals in one cable flow into the same direction. Typically connection of one system the other way round would harm neighbouring systems unacceptably, and is excluded when it violates the limits.

In the case of symmetric signal limits, no further distinction on transmission direction is made. In the case of asymmetric signal limits, the following naming convention is used in the present document:

- **Downstream** signal limits are mandatory for signals that are injected into an LT-port (or LT.cab-port) of the Local Loop Wiring. LT-ports are usually located at the central office side of the local loop wiring.
- **Upstream** signal limits are mandatory for signals that are injected into an NT-port (or NT.cab-port) of the Local Loop Wiring. NT-ports are usually located at the customer side.

For each port, it must be well identified if this is an LT- or NT-port, and which signal limits are mandatory for these ports.

NOTE 2: An example of unintended reversal of transmission direction may occur when the Main Distribution Frame (MDF) of another licensed operator is not co-located with the MDF of the loop provider (at the local exchange). If some of the wire pairs of a distribution cable are used for connecting these two MDFs, then upstream and downstream signals in different wire pairs have to flow in the same cable direction. In such a case, a so-called tie-cable can solve the problem. Such a tie-cable should be fully dedicated to this purpose, and fully *separated* from the standard distribution cables.


NOTE 3: Signal limits need not be the same for all NT-ports or LT-ports. It is conceivable that the signal limits depend on e.g. the loop length. A specification of this possible length dependence is beyond the scope of the present document.

## 5.3 Reference model

Figure 2 shows a generic reference model of the Local Loop Wiring (LLW), from a Spectral Management point of view. The signals of various Signal Sources connected to the LLW flow into the LLW through *well-identified* ports. The following naming convention is used:

- The signals that flow through an *LT-port* into the Local Loop Wiring have their origin in an *Exchange-side Signal Source* (ESS), such as for instance a local exchange. When signal limits are direction dependent, the signals labelled in the present document as *downstream* are intended for injection into these LT-ports, unless explicitly stated otherwise.
- The signals that flow through an *NT-port* into the Local Loop Wiring have their origin in a *Customer-side Signal Source* (CSS). When signal limits are direction dependent, the signals labelled in the present document as *upstream* signals are intended for injection into these NT-ports, unless explicitly stated otherwise.
- The signals that flow through an optional *LT.cab-port* or *NT.cab-port* into the Local Loop Wiring have their origin in *Remote Signal Sources* (RSS). Their signal limits may be different from the limits that hold for LT-ports and NT-ports.

This model (see figure 2) enables the identification of upstream and downstream directions. Furthermore, a distinction between NT-ports may be made on the basis of the loop length, when specifying signal limits on the ports.

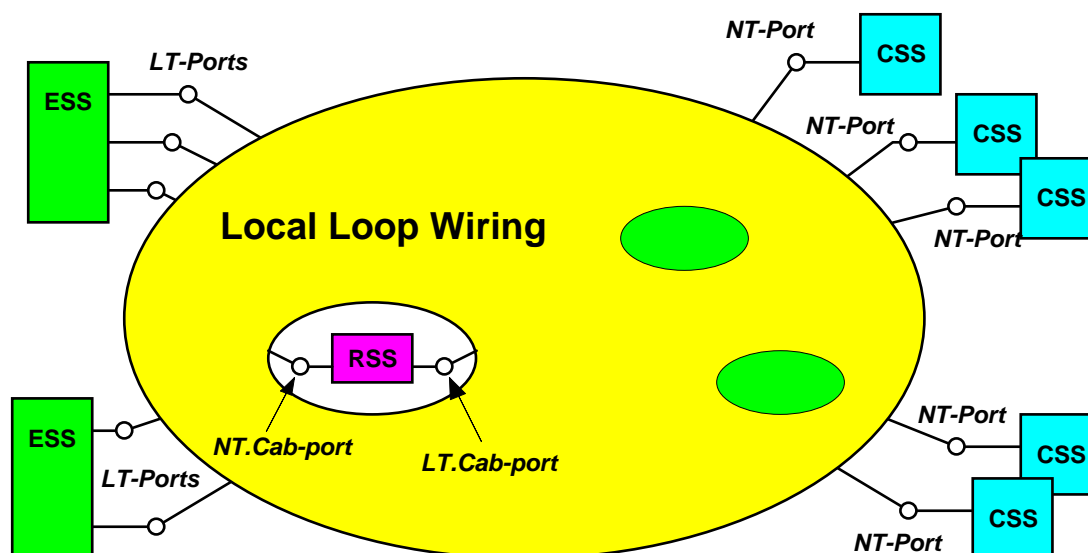

CSS:	Customer-side Signal Source
ESS:	Exchange-side Signal Source
RSS:	Remote Signal Source
LT-port:	Line Termination Port, for injecting downstream signals from a ESS
NT-port:	Network Termination Port, for injecting upstream signals from a CSS
LT.cab-port:	LT-cabinet Port, for injecting downstream signals from a RSS
NT.cab-port:	NT-cabinet Port, for injecting upstream signals from a RSS

NOTE: "Connecting a Signal Source to a port of the Local Loop Wiring", does not necessary mean "intended for transmission through that local loop wiring". For instance, in-house transmission equipment (such as home-PNA) may use existing in-house telephony wires, so they are also "connected to the local loop wiring". They will (unintentional) inject signals into the Local Loop Wiring via the NT-ports. These signals are subject to the signal limits at the ports.

**Figure 2: Reference model of the local loop wiring of an access network**

---

## 6 Minimum set of characteristics for signal descriptions

To classify signals for spectral management purposes, the following parameters are relevant:

- Total signal voltage (or power);
- Peak amplitude;
- Narrow-band signal voltage (or power);
- Unbalance about earth (LOV and LCL);
- Feeding Power (if relevant).

In some cases, additional parameters are required, such as feeding requirements (in case of remote powering) and ringing signals.

---

## 7 Cluster 0 signals (DC power feeding)

This cluster summarizes maximum DC feeding voltages and currents, used for remote powering of transmission equipment (including POTS, ISDN, HDSL and SDSL). The DC power-feeding limits are supplementary to the AC signal descriptions in the succeeding clusters 1 to 5. By referring to both kinds of signal descriptions, the simultaneous use of AC signals and DC power feeding over the same wire pair can be enabled.

Feeding voltages and currents are to be limited for reasons like:

- General safety requirements, including any additional network related safety requirements and/or network protection requirements specified by the loop provider.
- Interoperability and/or prevention of damage to equipment and devices (system related reasons)

### 7.1 "Class A" TNV power feeding (from the LT-port)

This category covers feeding voltages and currents that will not exceed the requirements relevant for safety, as can be found in ETSI [18] and Cenelec [17] safety standards for TNV-3 circuits. TNV-3 circuits have an operating voltage limit defined as a combination of the maximum DC-voltage and the peak AC-voltage, and may be subjected to overvoltages from the telecommunication network. TNV-3 circuits may be touched by users on a limited area of contact.

To be compliant with this signal class, the combination of the DC power feeding and AC peak signal shall not exceed limits calculated from the formula:  $(U_{DC}/120V + U_{AC,peak}/70,7V \leq 1)$ , and all requirements in [18] and [17] for TNV-3 circuits.

Reference: EG 201 212 [18].

Reference: EN 60950 [17].

#### 7.1.1 "Class B" RFT power feeding (from the LT-port)

This category covers feeding voltages and currents that will not exceed the requirements relevant for safety as can be found in ITU [19] safety standards for RFT circuits (Remote Feeding Telecommunication). RFT circuits are subdivided into current limited circuits (RFT-C) and voltage limited circuits (RFT-V). The circuits may be subjected to overvoltages from the telecommunication network, and access to the conductors is restricted to service personnel.

To be compliant with "*class B.1*" **RFT-C Power Feeding**, the feeding current shall not exceed 60mA DC for any feeding voltage value, and all other requirements in [19] for RFT-C circuits.

To be compliant with "*class B.2.1*" **RFT-V Power Feeding**, the steady state open circuit voltage from each conductor to earth shall not exceed 140 V d.c., and all other requirements in [19] for RFT-V circuits.

To be compliant with "*class B.2.2*" *RFT-V Power Feeding*, the steady state open circuit voltage from each conductor to earth shall not exceed 200 V d.c. if the short circuit current is limited to 10 mA d.c. and all other requirements in [19] for RFT-V circuits.

Reference: ITU-T Recommendation K.50 [19].

## 8 Cluster 1 signals (voice band)

This cluster summarizes signals that are generated by analogue transmission equipment (including POTS), voice band modems, analogue leased lines, telex signals encoded as voice band signals and music lines.

### 8.1 "POTS" signals (voice band lines 300 Hz to 3 400 Hz)

This category covers signals from telephony transmission equipment (e.g. telephones, voice band modems, Faxes, analogue leased lines, etc.) on a single wire pair. Unless other specified, the requirements on DTMF-signals (Dual Tone Multi-Frequency), as defined in [1], are equal to the voice signal.

A signal can be classified as a "POTS signal" if it is compliant with all the clauses below.

#### 8.1.1 Total signal voltage

To be compliant with this signal category, the mean signal voltage over a reference impedance  $Z_R$  (see figure 5) shall not exceed a level of -9,7 dBV, measured within a frequency band from at least 200 Hz to 3,8 kHz, and over a one-minute period. This requirement does not apply to DTMF signals.

Reference: TBR 021 [1], clause 4.7.3.1 (tested according to clause A.4.7.3.1).

To be compliant with this signal category, the level of any tone in the DTMF high frequency group shall not be greater than  $-9,0 \text{ dBV} + 2,0 \text{ dB} = -7,0 \text{ dBV}$ . The level of any tone in the low frequency group shall not be greater than  $-11,0 \text{ dBV} + 2,5 \text{ dB} = -8,5 \text{ dBV}$ . This is to be measured when the TE interface is terminated with the specified reference impedance  $Z_R$  (see figure 5).

Reference: TBR 021 [1], clause 4.8.2.2 (tested according to clause A.4.8.2.2).

#### 8.1.2 Peak amplitude

To be compliant with this signal category, the peak-to-peak signal voltage over a reference impedance  $Z_R$  (see figure 5) shall not exceed a level of 5,0 V, measured within a frequency band from at least 200 Hz to 3,8 kHz.

The definition and measurement method of peak amplitude is specified in clause 13.1.

Reference: TBR 021 [1], clause 4.7.3.2 (tested according to clause A.4.7.3.2).

#### 8.1.3 Narrow-band signal voltage

To be compliant with this signal category, the narrow-band signal voltage (NBSV) shall not exceed the limits given in table 1, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits, in which  $Z_R$  refers to the specified reference impedance  $Z_R$  (see figure 5). Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 3 illustrates the NBSV in a bandwidth-normalized way.

The NBSV is the average rms-voltage  $U$  of a sending signal into a (complex) load impedance  $Z$ , within a *power* bandwidth  $B$ . The measurement method of the NBSV is described in clause 13.2.

Reference: TBR 021 [1] (30 Hz to 4,3 kHz, clause 4.7.3.3), (4,3 kHz to 200 kHz, clause 4.7.3.4) the requirements above 200 kHz are extended from [1]. This extension is essential to guarantee compatibility with broadband xDSL systems.



Table 1: Break points of the narrow-band voltage limits

Frequency f	Impedance Z	Signal Level U	Power Bandwidth B	Spectral Voltage U/ $\sqrt{B}$
30 Hz	$Z_R$	-33,7 dBV	10 Hz	-43,7 dBV/ $\sqrt{\text{Hz}}$
100 Hz	$Z_R$	-10,7 dBV	10 Hz	-20,7 dBV/ $\sqrt{\text{Hz}}$
200 Hz	$Z_R$	-6,7 dBV	10 Hz	-16,7 dBV/ $\sqrt{\text{Hz}}$
3,8 kHz	$Z_R$	-6,7 dBV	10 Hz	-16,7 dBV/ $\sqrt{\text{Hz}}$
3,9 kHz	$Z_R$	-10,7 dBV	10 Hz	-20,7 dBV/ $\sqrt{\text{Hz}}$
4,0 kHz	$Z_R$	-16,7 dBV	10 Hz	-26,7 dBV/ $\sqrt{\text{Hz}}$
4,3 kHz	$Z_R$	-44,7 dBV	10 Hz	-54,7 dBV/ $\sqrt{\text{Hz}}$
4,3 kHz	$Z_R$	-40 dBV	300 Hz	-65 dBV/ $\sqrt{\text{Hz}}$
5,1 kHz	$Z_R$	-44 dBV	300 Hz	-69 dBV/ $\sqrt{\text{Hz}}$
8,9 kHz	$Z_R$	-44 dBV	300 Hz	-69 dBV/ $\sqrt{\text{Hz}}$
11,0 kHz	$Z_R$	-58,5 dBV	300 Hz	-83,5 dBV/ $\sqrt{\text{Hz}}$
11,0 kHz	$Z_R$	-58,5 dBV	1 kHz	-88,5 dBV/ $\sqrt{\text{Hz}}$
200 kHz	$Z_R$	-58,5 dBV	1 kHz	-88,5 dBV/ $\sqrt{\text{Hz}}$
200 kHz	135 $\Omega$	-60 dBV	1 kHz	-90 dBV/ $\sqrt{\text{Hz}}$
500 kHz	135 $\Omega$	-90 dBV	1 kHz	-120 dBV/ $\sqrt{\text{Hz}}$
500 kHz	135 $\Omega$	-60 dBV	1 MHz	-120 dBV/ $\sqrt{\text{Hz}}$
30 MHz	135 $\Omega$	-60 dBV	1 MHz	-120 dBV/ $\sqrt{\text{Hz}}$

NOTE: A voltage of 1 V, equals 0 dBV, and causes a power of +2,2 dBm in 600  $\Omega$  and +8,7 dBm in 135  $\Omega$ .

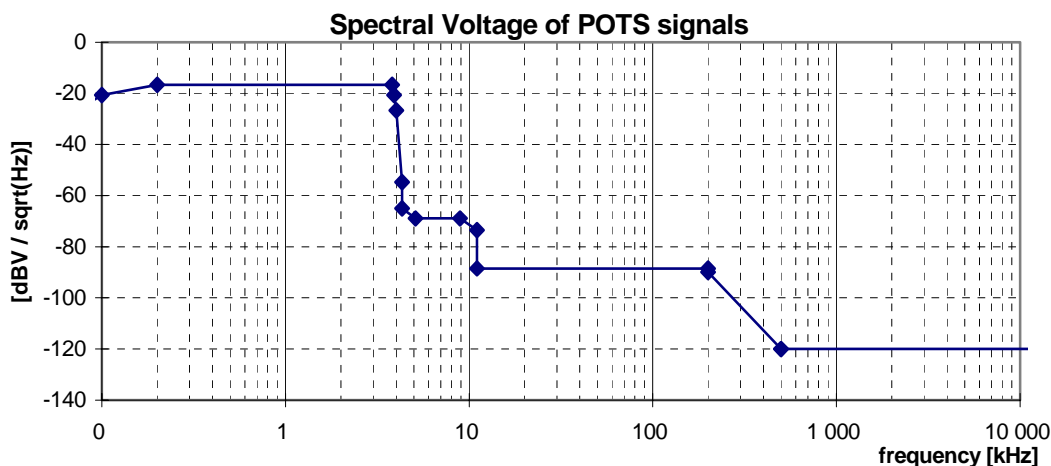


Figure 3: Spectral Voltage, for POTS signals, as specified in table 1

During tone signalling the limits given in table 1 do not apply to DTMF signals and are replaced by the following limits:

- In the range 4,3 kHz to 20 kHz, the individual level of any single frequency component shall not exceed -35,7 dBV, when terminated with  $Z_R$ .
- In the range 20 kHz to 200 kHz, the individual level of any single frequency component shall not exceed -40,7 dBV, when terminated with  $Z_R$ .
- In the range 200 kHz to 30 MHz, the individual level of any single frequency component is left for further study.

Reference: TBR 021 [1], clause 4.7.3.4.

## 8.1.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the impedance  $R_T = R_1 + R_2$ , as specified in table 2.

**Table 2: Values for the components for the terminating impedance for measuring the LOV and LCL**

	Value	Frequency range	Tolerance
Resistance $R_T$	300 $\Omega$	50 Hz - 3 800 Hz	
Resistance $R_T$	135/2 $\Omega$	3 800 Hz - 30 MHz	R1/R2 = 1 $\pm$ 0,1 %

NOTE: TE powering by Feeding bridge according to TBR 021 [1], clause 4.4.3.

The observed LOV shall have an rms voltage of below the value specified in table 3, measured in a *power* bandwidth  $B$ , centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 4. The LCL values of the associated break frequencies of this figure are given in table 4. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TBR 021 [1], clauses 4.4.3 and 4.7.4.1.


Reference: EN 300 450 [4], clause 4.2.2.

Reference: EN 300 453 [5], clause 4.2.2.

Reference: TS 101 270-1 [13], clause 8.3.3.

**Table 3: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	1 kHz	510 Hz	10 kHz	100 $\Omega$	150 nF

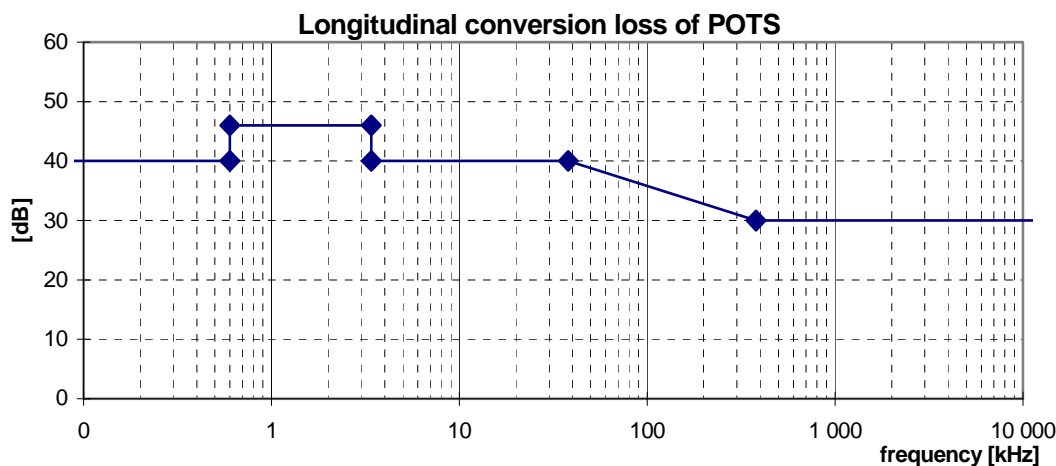

**Figure 4: Minimum longitudinal conversion loss for a POTS-signal source**

**Table 4: Frequencies and LCL values of the breakpoints of the LCL mask in figure 4**

Frequency range	Minimum value	Impedance
50 Hz to 600 Hz	40 dB	600 $\Omega$
600 Hz to 3 400 Hz	46 dB	600 $\Omega$
3 400 Hz to 3 800 Hz	40 dB	600 $\Omega$
3 800 Hz to 38 kHz	40 dB	135 $\Omega$
38 kHz to 380 kHz	40 dB to 30 dB	135 $\Omega$
380 kHz to 30 MHz	30 dB	135 $\Omega$


### 8.1.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for POTS services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

### 8.1.6 Reference impedance $Z_R$

The reference impedance  $Z_R$ , that is used to enable the specification of various signal levels, is the European harmonized complex impedance. This harmonized complex impedance (see figure 5) equals 270  $\Omega$  in series with a parallel combination of 750  $\Omega$  and 150 nF.

Reference: TBR 021 [1], clause A.2.1.

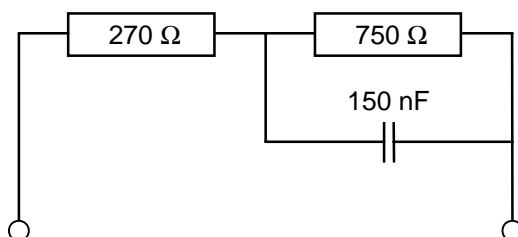**Figure 5: Reference impedance  $Z_R$** 

### 8.1.7 Ringing signal

To be compliant with this signal category, the AC ringing voltage shall not exceed the maximum values in table 5. The AC ringing signal may be or may be not superimposed on the DC feeding voltage.

Reference: ES 201 970 [2], clause 12.1.2.

Reference: EN 300 001 [3], clause 1.7.2.

**Table 5: Maximum ringing signal (POTS service)**

	Frequency	Maximum Voltage
<b>ES 201 970 [2]</b>	25 $\pm$ 2 Hz	100 $V_{rms}$
<b>Country 1</b>	50 Hz	100 $V_{rms}$
<b>Country 2</b>		

## 8.1.8 Metering signals

To be compliant with this signal category, 50 Hz common mode metering pulses (if added to POTS lines), shall be within the limits of table 6.

NOTE: Most access networks are using a different type of metering signals.

Reference: EN 300 001 [3], clause 1.7.8.

**Table 6: Maximum metering signal**

Frequency	Voltage	Pulse width
48 Hz to 52 Hz	Maximum 100 V <sub>rms</sub>	70 ms to 200 ms

---

## 9 Cluster 2 signals (semi broad band)

This cluster summarizes signals that are generated by digital transmission equipment up to 160 kbit/s, including ISDN-BA and 64 kbit/s and 128 kbit/s leased lines.

### 9.1 "ISDN.2B1Q" signals

This category covers signals generated by ISDN transmission equipment on a single wire-pair, based on 2B1Q line coding. This clause is based on the ETSI reports on ISDN equipment [6].

A signal can be classified as an "ISDN.2B1Q signal" if it is compliant with all the clauses below.

#### 9.1.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +13,5 dBm ( $\pm 0,5$  dBm), measured within a frequency band from at least 100 Hz to 80 kHz.

Reference: TS 102 080 [6], clause A.12.3.

#### 9.1.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 2,5 V ( $\pm 5$  %), measured within a frequency band from at least 100 Hz to 80 kHz.

The definition and measurement method of peak amplitude is specified in clause 13.1.

Reference: TS 102 080 [6], clause A.12.1.

#### 9.1.3 Narrow-band signal power

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 7, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 6 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.


NOTE: The NBSP specification in table 7 is reconstructed from the commonly used PSD specification in [6] (similar to figure 6), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The nature of the original PSD specification in [6] is in fact a NBSP specification, since the use of a 10 kHz bandwidth (above 10 kHz) and a 1 MHz bandwidth (above 300 kHz) is mandatory in [6]. The additional use of a sliding window PSD specification in [6], in order to make sure that different systems do not fill the entire allowable bandwidth with noise up to the PSD limit, illustrates the NBSP nature of the PSD specification in [6] in more detail. Mark that in [6] the lower frequency (300 kHz) has been specified, while table 7 specifies centre frequencies (starting at 300 kHz + 500 kHz).

Reference: TS 102 080 [6], clause A.12.4.

**Table 7: Break points of the narrow-band power limits**

Centre Frequency f	Impedance R	Signal Level P	Power bandwidth B	Spectral Power P/B	
510 Hz	135 Ω	-0 dBm	1 kHz	-30 dBm/Hz	A
10 kHz	135 Ω	-0 dBm	1 kHz	-30 dBm/Hz	
10 kHz	135 Ω	10 dBm	10 kHz	-30 dBm/Hz	
50 kHz	135 Ω	10 dBm	10 kHz	-30 dBm/Hz	
500 kHz	135 Ω	-40 dBm	10 kHz	-80 dBm/Hz	
1,4 MHz	135 Ω	-40 dBm	10 kHz	-80 dBm/Hz	
5 MHz	135 Ω	-80 dBm	10 kHz	-120 dBm/Hz	
30 MHz	135 Ω	-80 dBm	10 kHz	-120 dBm/Hz	
800 kHz	135 Ω	-30 dBm	1 MHz	-90 dBm/Hz	B
1,4 MHz	135 Ω	-30 dBm	1 MHz	-90 dBm/Hz	
3,637 MHz	135 Ω	-60 dBm	1 MHz	-120 dBm/Hz	
30 MHz	135 Ω	-60 dBm	1 MHz	-120 dBm/Hz	

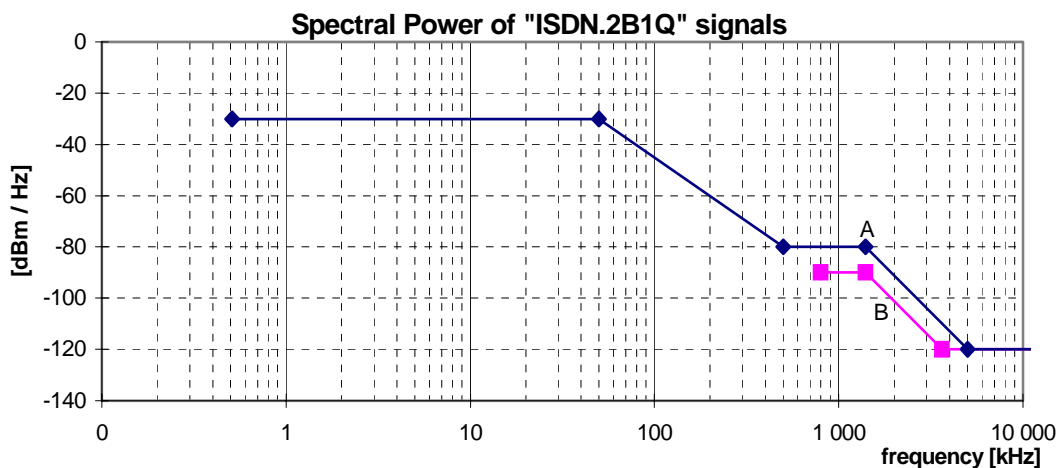

**Figure 6: Spectral Power, for ISDN.2B1Q signals, as specified in table 7**

#### 9.1.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a Longitudinal Output Voltage (LOV) and a Longitudinal Conversion Loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 8, measured in a *power* bandwidth  $B$ , centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.


The observed LCL shall be higher than the lower limits given in figure 7. The LCL values of the associated break frequencies of this figure are given in table 9. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 102 080 [6], clause A.13.3.1, extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3.

**Table 8: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	225 kHz	100 $\Omega$	150 nF

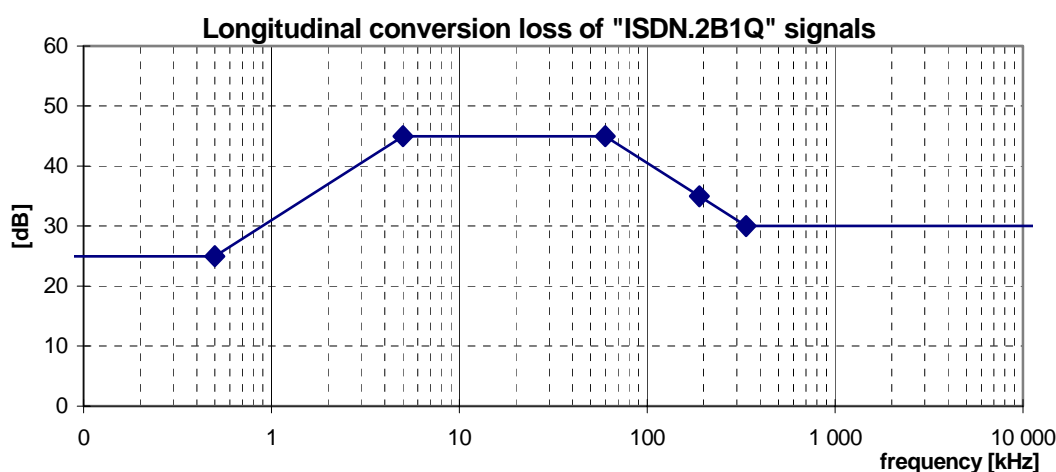

**Figure 7: Minimum longitudinal conversion loss for a "ISDN.2B1Q" signal source**

**Table 9: Frequencies and LCL values of the breakpoints of the LCL mask in figure 7**

Frequency range	LCL
< 0,5 kHz	25 dB
5 kHz	45 dB
60 kHz	45 dB
190 kHz	35 dB
337 kHz	30 dB
30 MHz	30 dB

### 9.1.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for ISDN.2B1Q services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 9.2 "ISDN.MMS.43" signals

This category covers signals generated by ISDN transmission equipment on a single wire-pair, based on MMS 43 (also known as 4B3T) line coding. This clause is based on the ETSI reports on ISDN equipment [6].

A signal can be classified as an "ISDN.MMS.43" signal if it is compliant with all clauses below.

### 9.2.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 150  $\Omega$  shall not exceed a level of +13,5 dBm ( $\pm 0,5$  dBm), measured within a frequency band from at least 100 Hz to 100 kHz.

### 9.2.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 150  $\Omega$  shall not exceed a level of 2,0 V ( $\pm 10$  %), measured within a frequency band from at least 100 Hz to 100 kHz.

The definition and measurement method of peak amplitude is specified in clause 13.1.

Reference: TS 102 080 [6], clause B.12.1.

### 9.2.3 Narrow-band signal power

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 10, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 8 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: The NBSP specification in table 10 is reconstructed from the commonly used PSD specification in [6] (similar to figure 8), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The nature of the original PSD specification in [6] is in fact a NBSP specification, since the use of a 10 kHz bandwidth (above 10 kHz) and a 1 MHz bandwidth (above 300 kHz) is mandatory in [6]. The additional use of a sliding window PSD specification in [6], in order to make sure that different systems do not fill the entire allowable bandwidth with noise up to the PSD limit, illustrates the NBSP nature of the PSD specification in [6] in more detail.

Mark that in [6] the lower frequency (300 kHz) has been specified, while table 10 specifies centre frequencies (starting at 300 kHz + 500 kHz).

Reference: TS 102 080 [6], clause B.12.4.

Table 10: Break points of the narrow-band power limits

Centre Frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
510 Hz	150 $\Omega$	-0 dBm	1 kHz	-30 dBm/Hz	A
10 kHz	150 $\Omega$	-0 dBm	1 kHz	-30 dBm/Hz	
10 kHz	150 $\Omega$	10 dBm	10 kHz	-30 dBm/Hz	
50 kHz	150 $\Omega$	10 dBm	10 kHz	-30 dBm/Hz	
300 kHz	150 $\Omega$	-27 dBm	10 kHz	-67 dBm/Hz	
1 MHz	150 $\Omega$	-27 dBm	10 kHz	-67 dBm/Hz	
5 MHz	150 $\Omega$	-80 dBm	10 kHz	-120 dBm/Hz	B
30 MHz	150 $\Omega$	-80 dBm	10 kHz	-120 dBm/Hz	
800 kHz	150 $\Omega$	-17 dBm	1 MHz	-77 dBm/Hz	
1 MHz	150 $\Omega$	-17 dBm	1 MHz	-77 dBm/Hz	
3,69 MHz	150 $\Omega$	-60 dBm	1 MHz	-120 dBm/Hz	
30 MHz	150 $\Omega$	-60 dBm	1 MHz	-120 dBm/Hz	

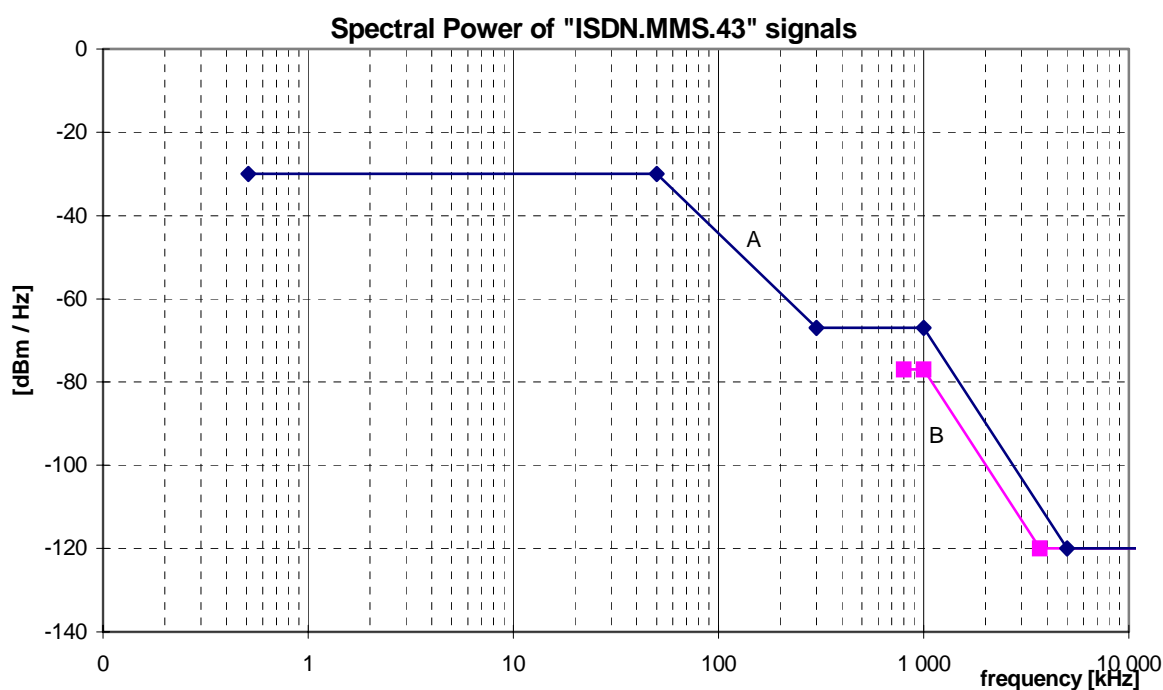


Figure 8: Spectral Power, for "ISDN.MMS.43" signals, as specified in table 10

## 9.2.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a Longitudinal Output Voltage (LOV) and a Longitudinal Conversion Loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 150 \Omega$  of the Signal Source under test.



The observed LOV shall have an rms voltage of below the value specified in table 11, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.


The observed LCL shall be higher than the lower limits given in figure 9. The LCL values of the associated break frequencies of this figure are given in table 12. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 102 080 [6], clause B.13.3 extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3.

**Table 11: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	245 kHz	100 $\Omega$	150 nF

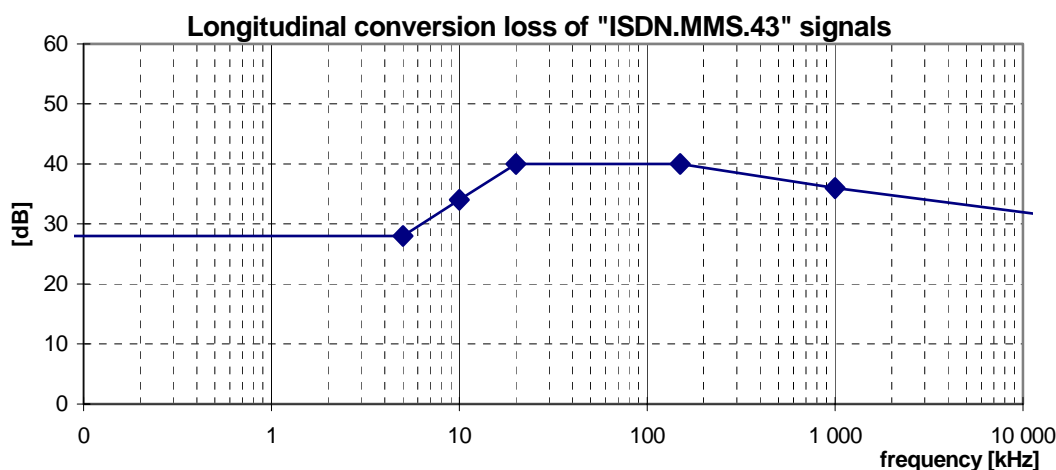

**Figure 9: Minimum longitudinal conversion loss for a "ISDN.MMS43" signal source**

**Table 12: Frequencies and LCL values of the breakpoints of the LCL mask in figure 9**

Frequency range	LCL
< 5 kHz	28 dB
10 kHz	34 dB
20 kHz	40 dB
150 kHz	40 dB
1 MHz	36 dB
30 MHz	30 dB

## 9.2.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for ISDN.MMS.43 services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 9.3 "Proprietary.SymDSL.CAP.QAM" signals

This category covers signals, generated by Proprietary multi-rate SymDSL transmission equipment on one wire-pair. This signal is labelled as Proprietary, since it is not covered by ETSI, ITU nor ANSI product standards. This signal definition is linecode independent, but dedicated to signals from transmission equipment for variable bit-rate leased lines that are using CAP or QAM modulation.

A signal can be classified as a "Proprietary.SymDSL.CAP.QAM" signal if it is compliant with all clauses below. Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ .

### 9.3.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 1 MHz.

NOTE: No ETSI deliverable does specify this parameter.

### 9.3.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 7,5 V (15 V peak-peak), measured within a frequency band from at least 100 Hz to 1 MHz.

The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 9.3.3 Narrow-band signal power (NBSP)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 13, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 10 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

**Table 13: Break points of the narrow-band signal power P**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
510 Hz	135 $\Omega$	-0 dBm	1 kHz	-30 dBm/Hz	A
10 kHz	135 $\Omega$	-0 dBm	1 kHz	-30 dBm/Hz	
10 kHz	135 $\Omega$	+10 dBm	10 kHz	-30 dBm/Hz	
50 kHz	135 $\Omega$	+10 dBm	10 kHz	-30 dBm/Hz	
120 kHz	135 $\Omega$	-9 dBm	10 kHz	-49 dBm/Hz	
300 kHz	135 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
30 MHz	135 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
300 kHz	135 $\Omega$	-30 dBm	1 MHz	-90 dBm/Hz	B
460 kHz	135 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
30 MHz	135 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	

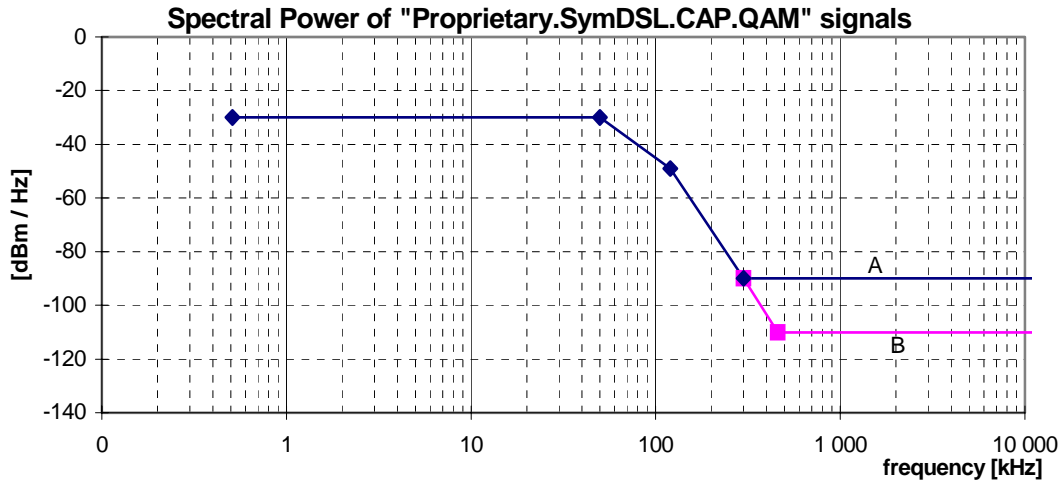


Figure 10: Spectral Power, for "Proprietary.SymDSL.CAP.QAM" signals, as specified in table 13

### 9.3.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a Longitudinal Output Voltage (LOV) and a Longitudinal Conversion Loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the signal source under test.

The observed LOV shall have an rms voltage of below the value specified in table 14, measured in a *power* bandwidth  $B$ , centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 11. The LCL values of the associated break frequencies of this figure are given in table 41. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

Table 14: Values for the LOV limits

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	225 kHz	100 $\Omega$	150 nF

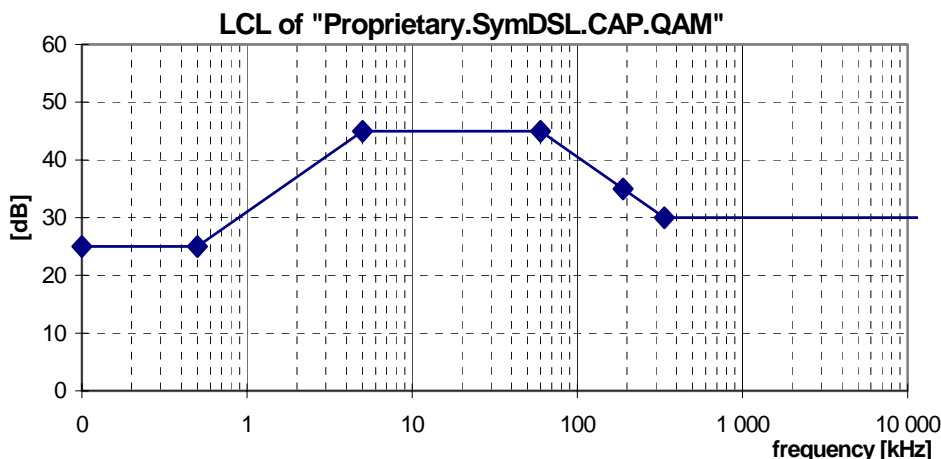


Figure 11: Minimum LCL for a "Proprietary.SymDSL.CAP.QAM" signal source

Table 15: Frequencies and LCL values of the breakpoints of the LCL mask in figure 11

Frequency	LCL
< 0,5 kHz	25 dB
5 kHz	45 dB
60 kHz	45 dB
190 kHz	35 dB
337 kHz	30 dB
30 MHz	30 dB

## 10 Cluster 3 signals (symmetrical broad band)

This cluster summarizes symmetrical signals that are generated by digital transmission equipment up to 2 Mbit/s, including HDSL and SDSL. If such a system requires more than one wire-pair for carrying that bitrate, the signal description holds for each individual wire-pair.

These signals are commonly used to carry services like high quality leased lines, with symmetrical bit rates (in up- and downstream directions).

### 10.1 "HDSL.2B1Q/3" signals (392 kbaud leased lines)

This category covers signals, generated by HDSL transmission equipment on three wire-pairs, based on 2B1Q line coding. This clause is based on the ETSI reports on HDSL equipment [7]. These are essentially 392 kbaud systems (per wire-pair).

A signal (per wire-pair) can be classified as an "HDSL.2B1Q/3 signal" if it is compliant with all clauses below. Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ , and does not apply to the DC remote power feeding (if any).

#### 10.1.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 784 kHz.

Reference: TS 101 135 [7], clause 5.8.4.4.

## 10.1.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of  $135 \Omega$  shall not exceed a level of  $2,64 \text{ V}$  ( $\pm 7 \%$ ), measured within a frequency band from at least  $100 \text{ Hz}$  to  $784 \text{ kHz}$ . The definition and measurement method of peak amplitude is specified in clause 13.1.

Reference: TS 101 135 [7], clause 5.8.4.1.

## 10.1.3 Narrow-band signal power

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 16, at any point in the frequency range  $100 \text{ Hz}$  to  $30 \text{ MHz}$ . This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 12 illustrates the NBSP in a bandwidth-normalized way.


The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Reference: TS 101 135 [7], clause 5.8.4.3. These numbers are reconstructed from PSD requirements in [7].

NOTE: The NBSP specification in table 16 is reconstructed from the commonly used PSD specification in [7] (similar to figure 12), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

**Table 16: Break points of the narrow-band power limits**

Centre Frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,51 kHz	$135 \Omega$	-7 dBm	1 kHz	-37 dBm/Hz
10 kHz	$135 \Omega$	-7 dBm	1 kHz	-37 dBm/Hz
10 kHz	$135 \Omega$	+3 dBm	10 kHz	-37 dBm/Hz
196 kHz	$135 \Omega$	+3 dBm	10 kHz	-37 dBm/Hz
1,96 MHz	$135 \Omega$	-77 dBm	10 kHz	-117 dBm/Hz
1,96 MHz	$135 \Omega$	-57 dBm	1 MHz	-117 dBm/Hz
30 MHz	$135 \Omega$	-57 dBm	1 MHz	-117 dBm/Hz

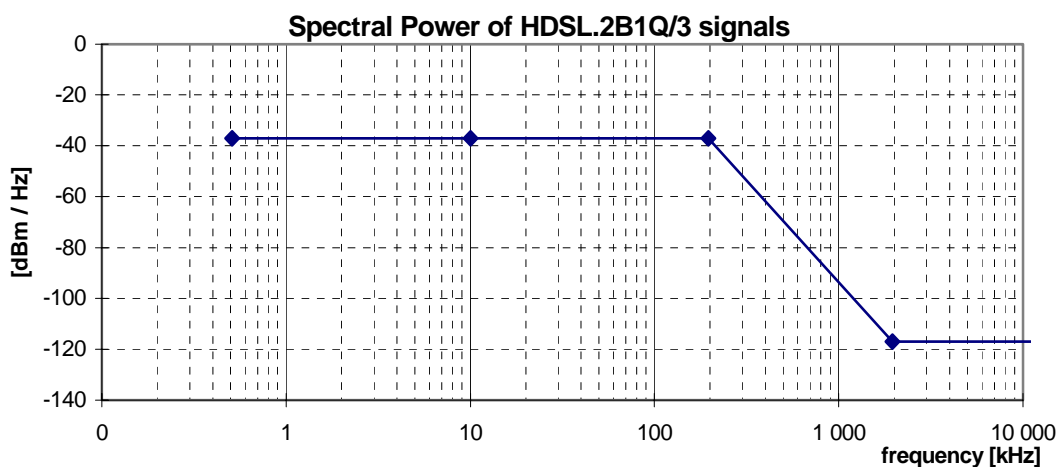

**Figure 12: Spectral Power, for HDSL.2B1Q/3 signals, as specified in table 16**

## 10.1.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a Longitudinal Output Voltage (LOV) and a Longitudinal Conversion Loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the signal source under test.

The observed LOV shall have an rms voltage of below the value specified in table 17, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.


The observed LCL shall be higher than the lower limits given in figure 13. The LCL values of the associated break frequencies of this figure are given in table 18. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 101 135 [7], clause 5.8.5.1 extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3.

**Table 17: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	410 kHz	100 $\Omega$	150 nF

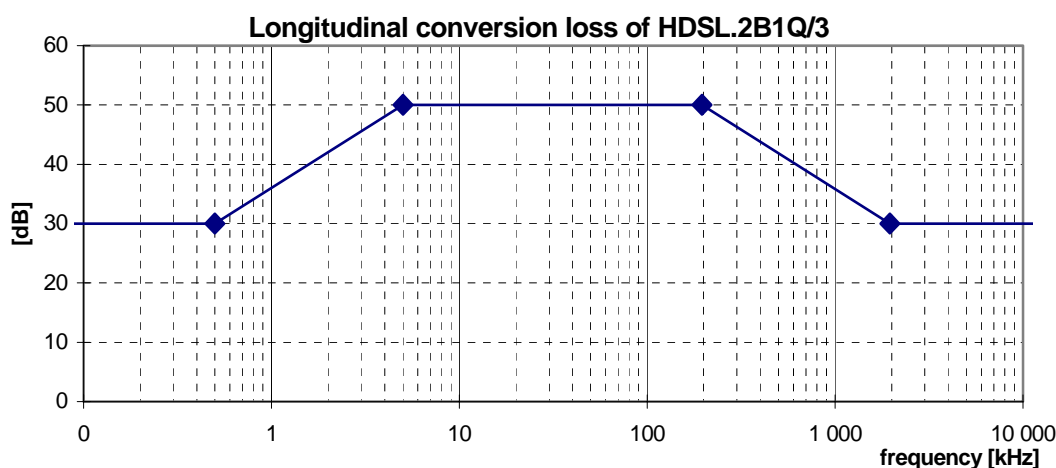

**Figure 13: Minimum longitudinal conversion loss for a HDSL.2B1Q/3 signal source (392 kbaud/wirepair)**

**Table 18: Frequencies and LCL values of the breakpoints of the LCL mask in figure 13**

Frequency	LCL
< 0,5 kHz	30 dB
5 kHz	50 dB
196 kHz	50 dB
1,96 MHz	30 dB
30 MHz	30 dB

### 10.1.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for HDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.2 "HDSL.2B1Q/2" signals (584 kbaud leased lines)

This category covers signals, generated by HDSL transmission equipment on two wire-pairs, based on 2B1Q line coding. This clause is based on the ETSI reports on HDSL equipment [7]. These are essentially 584 kbaud systems (per wire-pair).

A signal (per wire-pair) can be classified as an "HDSL.2B1Q/2 signal" if it is compliant with all clauses below. Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ , and does not apply to the DC remote power feeding (if any).

### 10.2.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 1 168 kHz.

Reference: TS 101 135 [7], clause 5.8.4.4.

### 10.2.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 2,64 V ( $\pm 7\%$ ), measured within a frequency band from at least 100 Hz to 1 168 kHz. The definition and measurement method of peak amplitude is specified in clause 13.1.

Reference: TS 101 135 [7], clause 5.8.4.1.

### 10.2.3 Narrow-band signal power

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 19, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 14 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Reference: TS 101 135 [7], clause 5.8.4.3. These numbers are reconstructed from PSD requirements in [7].

NOTE: The NBSP specification in table 19 is reconstructed from the commonly used PSD specification in [7] (similar to figure 14), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

Table 19: Break points of the narrow-band power limits

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,51 kHz	135 $\Omega$	-9 dBm	1 kHz	-39 dBm/Hz
10 kHz	135 $\Omega$	-9 dBm	1 kHz	-39 dBm/Hz
10 kHz	135 $\Omega$	+1 dBm	10 kHz	-39 dBm/Hz
292 kHz	135 $\Omega$	+1 dBm	10 kHz	-39 dBm/Hz
2,92 MHz	135 $\Omega$	-79 dBm	10 kHz	-119 dBm/Hz
2,92 MHz	135 $\Omega$	-59 dBm	1 MHz	-119 dBm/Hz
30 MHz	135 $\Omega$	-59 dBm	1 MHz	-119 dBm/Hz

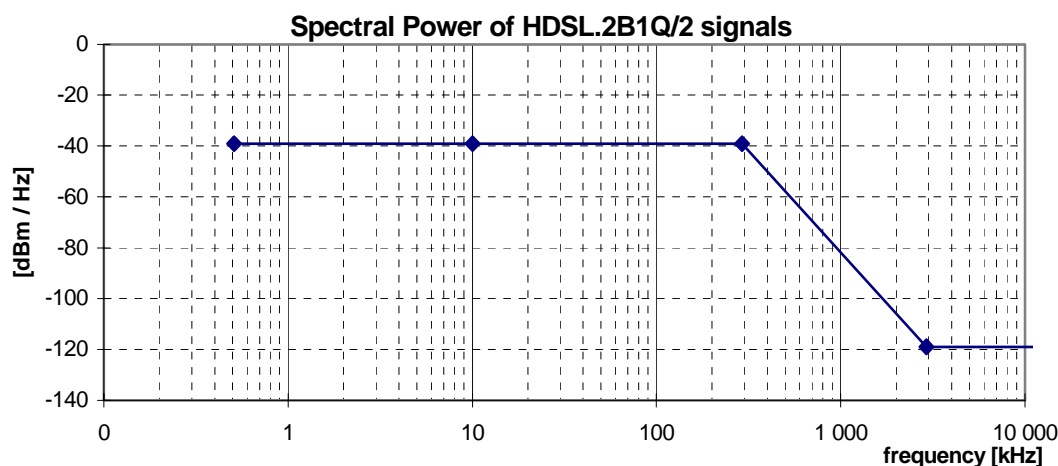


Figure 14: Spectral Power, for HDSL.2B1Q/2 signals, as specified in table 19

## 10.2.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a Longitudinal Output Voltage (LOV) and a Longitudinal Conversion Loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 20, measured in a *power* bandwidth  $B$ , centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 12.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 15. The LCL values of the associated break frequencies of this figure are given in table 21. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 101 135 [7], clause 5.8.5.1 extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3.



Table 20: Values for the LOV limits

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	575 kHz	100 $\Omega$	150 nF

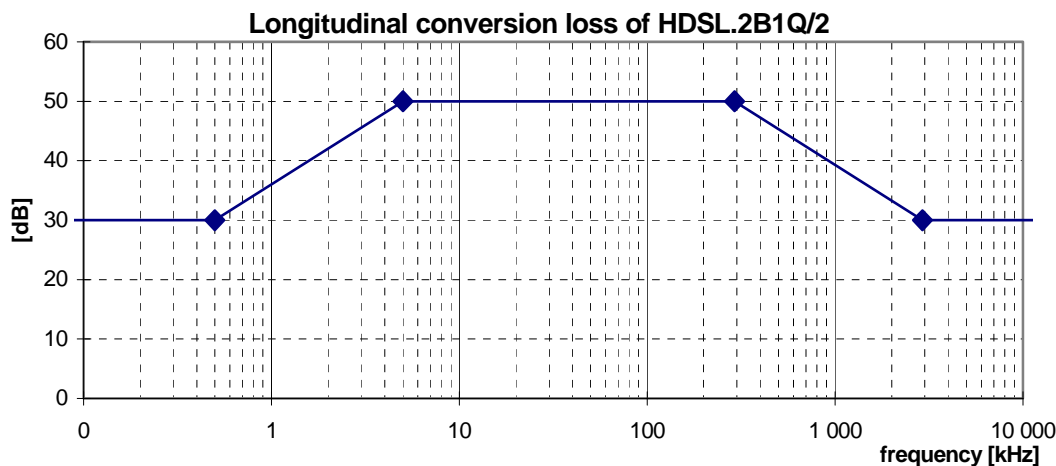


Figure 15: Minimum longitudinal conversion loss for a HDSL.2B1Q/2 signal source (584 kbaud/wirepair)

Table 21: Frequencies and LCL values of the breakpoints of the LCL mask in figure 15

Frequency	LCL
< 0,5 kHz	30 dB
5 kHz	50 dB
292 kHz	50 dB
2,92 MHz	30 dB
30 MHz	30 dB

### 10.2.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for HDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.3 "HDSL.2B1Q/1" signals (1 160 kbaud leased lines)

This category covers signals, generated by HDSL transmission equipment on a single wire-pair, based on 2B1Q line coding. This clause is based on the ETSI reports on HDSL equipment [7].

A signal (per wire-pair) can be classified as an "HDSL.2B1Q/1 signal" if it is compliant with all clauses below. Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ , and does not apply to the DC remote power feeding (if any).

### 10.3.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 2 320 kHz.

Reference: TS 101 135 [7], clause 5.8.4.4.

### 10.3.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of  $135 \Omega$  shall not exceed a level of  $2,50 \text{ V}$  ( $\pm 7 \%$ ), measured within a frequency band from at least  $100 \text{ Hz}$  to  $2\,320 \text{ kHz}$ . The definition and measurement method of peak amplitude is specified in clause 13.1.

Reference: TS 101 135 [7], clause 5.8.4.1.

### 10.3.3 Narrow-band signal power

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 22, at any point in the frequency range  $100 \text{ Hz}$  to  $30 \text{ MHz}$ . This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 16 illustrates the NBSP in a bandwidth-normalized way.


The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: The NBSP specification in table 22 is reconstructed from the commonly used PSD specification in [7] (similar to figure 16), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

Reference: TS 101 135 [7], clause 5.8.4.3. These numbers are reconstructed from PSD requirements in [7].

**Table 22: Break points of the narrow-band power limits**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,51 kHz	$135 \Omega$	-11,5 dBm	1 kHz	-41,5 dBm/Hz
10 kHz	$135 \Omega$	-11,5 dBm	1 kHz	-41,5 dBm/Hz
10 kHz	$135 \Omega$	-1,5 dBm	10 kHz	-41,5 dBm/Hz
485 kHz	$135 \Omega$	-1,5 dBm	10 kHz	-41,5 dBm/Hz
4,850 MHz	$135 \Omega$	-81,5 dBm	10 kHz	-121,5 dBm/Hz
4,850 MHz	$135 \Omega$	-61,5 dBm	1 MHz	-121,5 dBm/Hz
30 MHz	$135 \Omega$	-61,5 dBm	1 MHz	-121,5 dBm/Hz

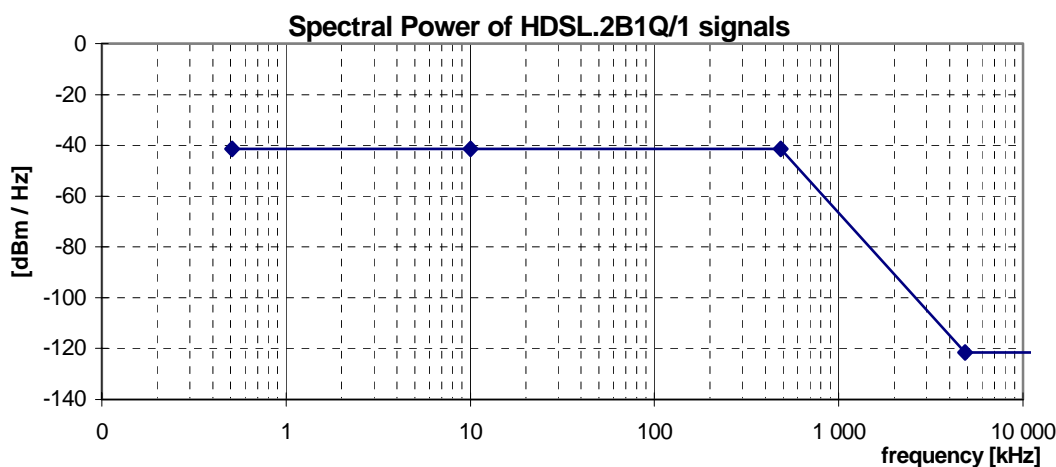

**Figure 16: Spectral Power, for HDSL.2B1Q/1 signals, as specified in table 22**

### 10.3.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 23, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.


The observed LCL shall be higher than the lower limits given in figure 17. The LCL values of the associated break frequencies of this figure are given in table 24. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 101 135 [7], clause 5.8.5.1, extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3.

**Table 23: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	890 kHz	100 $\Omega$	150 nF

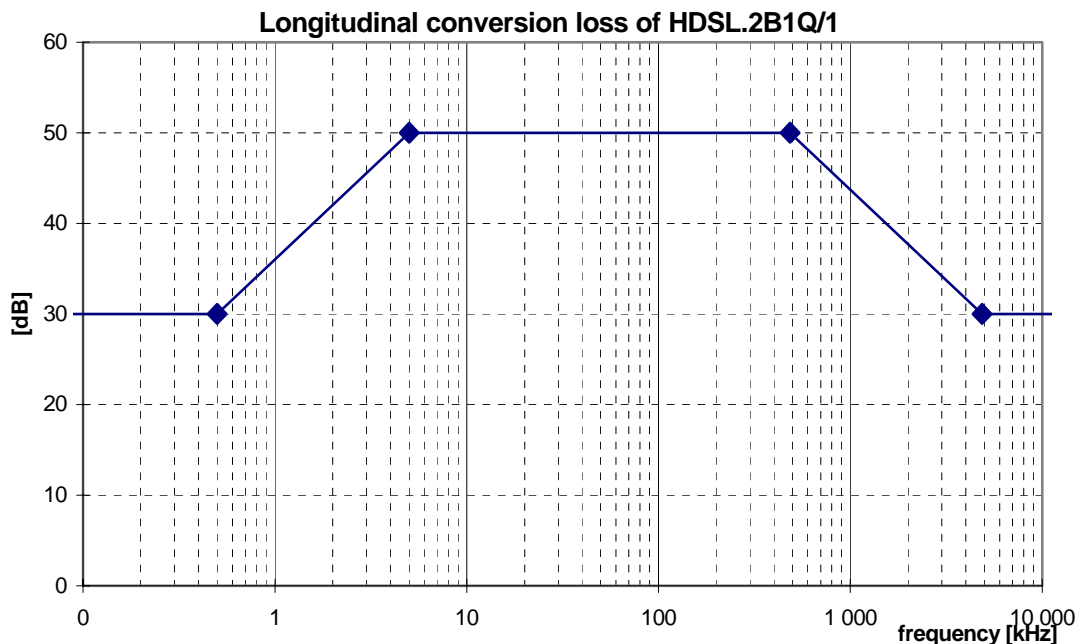

**Figure 17: Minimum longitudinal conversion loss for a HDSL.2B1Q/1 signal source**

**Table 24: Frequencies and LCL values of the breakpoints of the LCL mask in figure 17**

Frequency	LCL
<0,5 kHz	30 dB
5 kHz	50 dB
485 kHz	50 dB
4,85 MHz	30 dB
30 MHz	30 dB

### 10.3.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for HDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.4 "HDSL.CAP/2" signals

This category covers signals, generated by HDSL transmission equipment on two wire-pairs, based on CAP modulation. This clause is based on the ETSI reports on HDSL equipment [7].

A signal (per wire-pair) can be classified as an "HDSL.CAP/2 signal" if it is compliant with all clauses below. Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ , and does not apply to the DC remote power feeding (if any).

### 10.4.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 1 MHz.

Reference: TS 101 135 [7], clause B.5.8.4.1.

### 10.4.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 6,5 V (13 V peak-peak), measured within a frequency band from at least 100 Hz to 1 MHz. The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 10.4.3 Narrow-Band Signal Power (NBSP)

To be compliant with this signal category, the Narrow-Band Signal Power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 25, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 18 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.


NOTE: The NBSP specification in table 25 is reconstructed from the commonly used PSD specification in [7] (similar to figure 18), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall be met simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [7], while the 100 kHz bandwidth values represent the "nominal PSD values". The 100 kHz bandwidth specification has been added here to smooth spectral ripple (" $\pm 1,5$  dB") from the "maximum PSD" into the "nominal PSD".

Reference: TS 101 135 [7], clause B.5.8.4.2, reconstructed from the PSD requirements in [7].

**Table 25: Break points of the narrow-band power limits**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
0,51 kHz	135 $\Omega$	-25,5 dBm	1 kHz	-55,5 dBm/Hz	A
3,98 kHz	135 $\Omega$	-25,5 dBm	1 kHz	-55,5 dBm/Hz	
3,98 kHz	135 $\Omega$	-15,5 dBm	10 kHz	-55,5 dBm/Hz	
21,50 kHz	135 $\Omega$	-1,5 dBm	10 kHz	-41,5 dBm/Hz	
39,02 kHz	135 $\Omega$	+1,5 dBm	10 kHz	-38,5 dBm/Hz	
237,58 kHz	135 $\Omega$	+1,5 dBm	10 kHz	-38,5 dBm/Hz	
255,10 kHz	135 $\Omega$	-1,5 dBm	10 kHz	-41,5 dBm/Hz	
272,62 kHz	135 $\Omega$	-17 dBm	10 kHz	-57 dBm/Hz	
297,00 kHz	135 $\Omega$	-30 dBm	10 kHz	-70 dBm/Hz	
1,188 MHz	135 $\Omega$	-80 dBm	10 kHz	-120 dBm/Hz	
1,188 MHz	135 $\Omega$	-60 dBm	1 MHz	-120 dBm/Hz	
30 MHz	135 $\Omega$	-60 dBm	1 MHz	-120 dBm/Hz	
30 kHz	135 $\Omega$	+10 dBm	100 kHz	-40 dBm/Hz	B
250 kHz	135 $\Omega$	+10 dBm	100 kHz	-40 dBm/Hz	

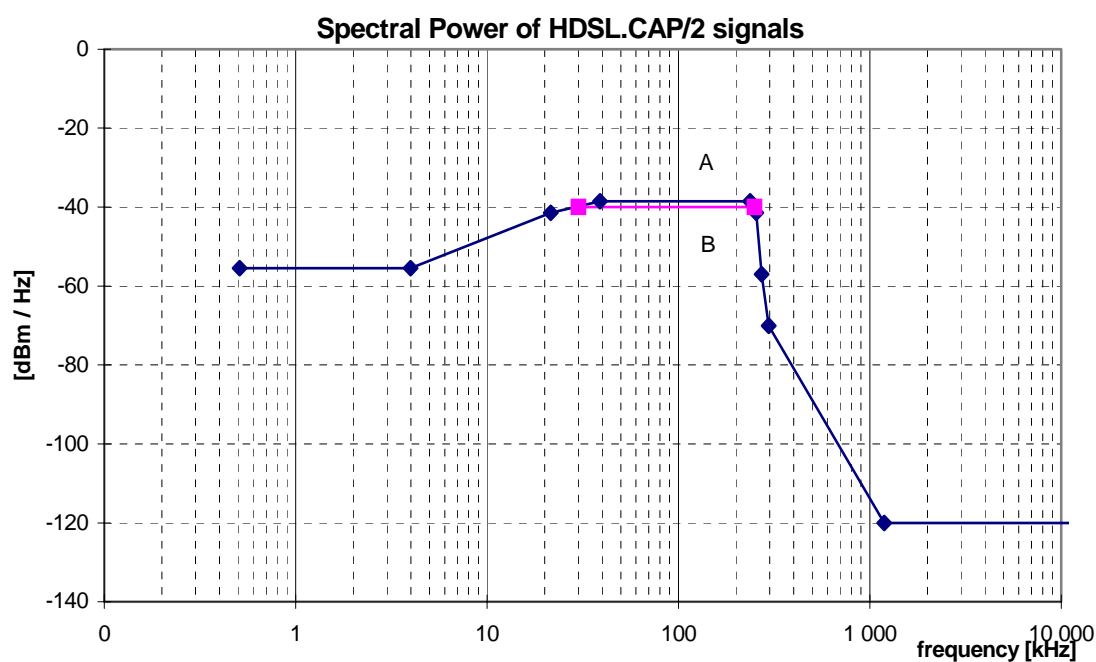

**Figure 18: Spectral Power, for HDSL.CAP/2 signals, as specified in table 25**

#### 10.4.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a Longitudinal Output Voltage (LOV) and a Longitudinal Conversion Loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 3.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 26, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 3.3.2 defines an example measurement method for longitudinal output voltage.


The observed LCL shall be higher than the lower limits given in figure 19. The LCL values of the associated break frequencies of this figure are given in table 27. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 101 135 [7], clause B.5.8.5.1, extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3.

**Table 26: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	285 kHz	100 $\Omega$	150 nF

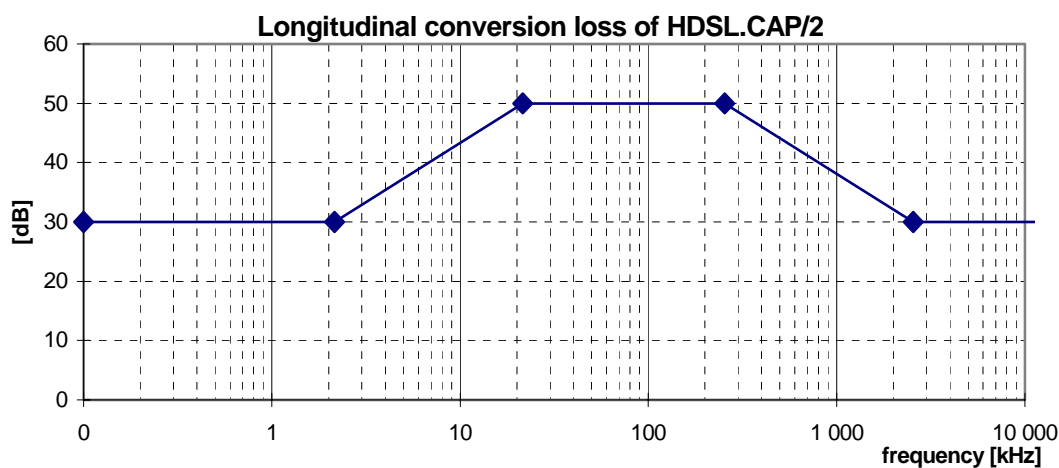

**Figure 19: Minimum longitudinal conversion loss**

**Table 27: Frequencies and LCL values of the breakpoints of the LCL mask in figure 19**

Frequency	LCL
< 2,15 kHz	30 dB
21,5 kHz	50 dB
255 kHz	50 dB
2,55 MHz	30 dB
30 MHz	30 dB

#### 10.4.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for HDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.5 "SDSL::Fn" signals

This category covers signals, generated by multi-rate SDSL transmission equipment on one or two wire pairs. This clause is based on ETSI SDSL standard [8] and on ITU Recommendation G.991.2 [9]. The line code modulation used in these standards is Ungerboeck Coded Pulse Amplitude Modulation (UC-PAM), also known as Trellis Coded PAM (TC-PAM).

The SDSL standards specify both symmetric and asymmetric PSD masks. This signal description is dedicated to the symmetric variant. For the symmetric PSD masks the naming convention is "SDSL::Fn" where the phrase "Fn" is a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing "Fn" in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. A signal with a lower Principal Frequency has a higher inband PSD.

Table 28 gives several examples on how to use the naming convention for specifying the actual parameter value  $F_n$ . It also illustrates some (informative) bit rates that can be transported within these signal limits, when using the associated (informative) modulation parameters. These are examples only, other system implementations may use the same signal limits in a different way.

**Table 28: Example on how the naming convention relates to the actual parameter value  $F_N$  that is used in the clauses below to specify the signal limits of this signal category. The actual bit rates and modulation parameters are implementation dependent, and informative only**

Signal category	$F_N$ [kHz]	Symbol Rate [kbaud]	Bit/symbol	Line Bit Rate [kbit/s]
SDSL::67	66,67	66,67	3	200
SDSL::131	130,67	130,67	3	392
SDSL::174	173,33	173,33	3	520
SDSL::259	258,67	258,67	3	776
SDSL::344	344	344	3	1 032
SDSL::430	429,33	429,33	3	1 288
SDSL::515	514,67	514,67	3	1 544
SDSL::686	685,33	685,33	3	2 056
SDSL::771	770,67	770,67	3	2 312

### 10.5.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of  $P_{\max}$ , measured within a frequency band from at least 100 Hz to  $2 \times F_N$ .  $P_{\max}$  has the following values for the different SDSL signals:

- $+13,5 \pm 0,5$  dBm for "SDSL::Fn" signals, when  $F_n < 685$  kHz
- $+14,5 \pm 0,5$  dBm for "SDSL::Fn" signals, when  $F_n \geq 685$  kHz

Reference: TS 101 524 [8], clauses 9.4.1.

Reference: ITU-T Recommendation G.991.2 [9], clauses B.4.1 and B.4.2.

## 10.5.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of  $135 \Omega$  shall not exceed a level of  $V_{\text{peak}} (\pm 7 \%)$ , measured within a frequency band from at least 100 Hz to  $F_N \times 2$ .

$V_{\text{peak}}$  has the following values for the different SDSL signals:

- 12 V for "SDSL::Fn" signals, when  $F_n < 685$  kHz
- 12 V for "SDSL::Fn" signals, when  $F_n \geq 685$  kHz

The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

## 10.5.3 Narrow-band signal power (NBSP)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in the tables in the following clauses, at any point in the frequency range 100 Hz to 30 MHz. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Table 29 describes the break points of these limits for the symmetric PSD masks for all Principal frequencies between 67 kHz and 771 kHz. Figure 20 illustrates the NBSP in a bandwidth-normalized way.

Reference: TS 101 524 [8], clause 9.4.1.

Reference: ITU-T Recommendation G.991.2 [9], clause B.4.1.

**Table 29: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category**

Frequency $f$	Impedance $R$	Signal Level $P$ [dBm]	Noise Bandwidth $B$	Spectral Power $P/B$ [dBm/Hz]
0,1 kHz	135 $\Omega$	$P_0 + 1,4 + 20$	100 Hz	$P_0 + 1,4$
1 kHz	135 $\Omega$	$P_0 + 1,4 + 20$	100 Hz	$P_0 + 1,4$
1 kHz	135 $\Omega$	$P_0 + 1,4 + 30$	1 kHz	$P_0 + 1,4$
10 kHz	135 $\Omega$	$P_0 + 1,4 + 30$	1 kHz	$P_0 + 1,4$
10 kHz	135 $\Omega$	$P_0 + 1,4 + 40$	10 kHz	$P_0 + 1,4$
$0,1 \times F_N$	135 $\Omega$	$P_0 + 1,4 + 40$	10 kHz	$P_0 + 1,4$
$0,275 \times F_N$	135 $\Omega$	$P_0 + 40$	10 kHz	$P_0$
$0,4 \times F_N$	135 $\Omega$	$P_0 - 2 + 40$	10 kHz	$P_0 - 2$
$0,475 \times F_N$	135 $\Omega$	$P_0 - 4,5 + 40$	10 kHz	$P_0 - 4,5$
$0,6 \times F_N$	135 $\Omega$	$P_0 - 14 + 40$	10 kHz	$P_0 - 14$
$0,9 \times F_N$	135 $\Omega$	$P_0 - 45 + 40$	10 kHz	$P_0 - 45$
$0,96 \times F_N$	135 $\Omega$	$P_1 + 40$	10 kHz	$P_1$
1,5 MHz	135 $\Omega$	-65	10 kHz	-105
1,5 MHz	135 $\Omega$	-50	1 MHz	-110
30 MHz	135 $\Omega$	-50	1 MHz	-110

The reference power levels,  $P_0$  and  $P_1$ , in table 29 are given by the formulas below. Table 30 lists these values for few sample Principal frequencies.



$$P_0 = 10 \times \log_{10} \left( \frac{K_{SDSL}}{135} \right) - 10 \times \log_{10} \left( \frac{F_N}{F_0} \right)$$


$$P_1 = -57 - 15 \times \log_{10} \left( \frac{F_N}{F_0} \right)$$

$$K_{SDSL} = \begin{cases} 7,86 & F_N < 685 \text{ kHz} \\ 9,9 & F_N \geq 685 \text{ kHz} \end{cases}$$

$$F_0 = 1 \text{ kHz}$$

**Table 30: Reference power levels, as a function of the Principle frequency. The table summarizes some example values, calculated from their formulas**

$F_N$	67	131	174	259	344	430	515	686	771	kHz
$P_0$	-30,6	-33,5	-34,8	-36,5	-37,7	-38,7	-39,5	-40,7	-41,2	dBm/Hz
$P_1$	-84,4	-88,8	-90,6	-93,2	-95,0	-96,5	-97,7	-99,5	-100,3	dBm/Hz

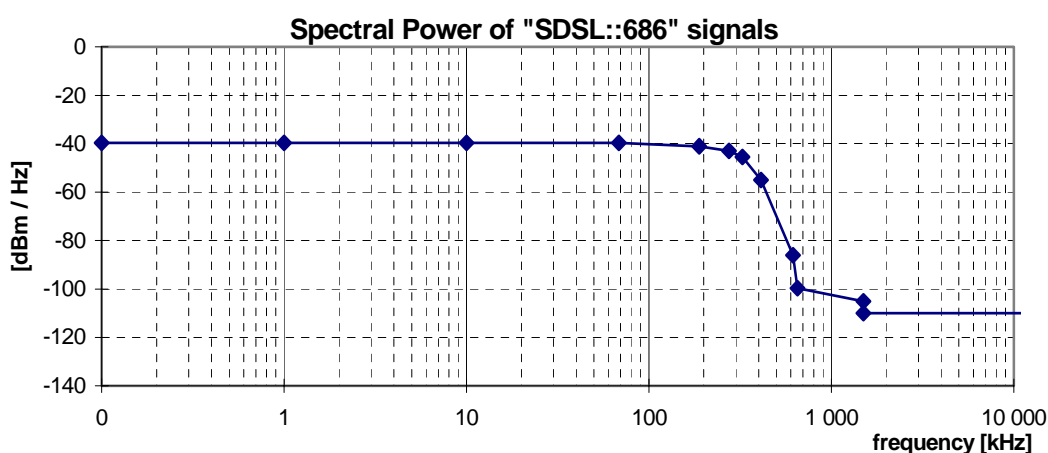

**Figure 20: Spectral Power, for "SDSL::686" signals (at  $F_N = 686$  kHz), as specified in table 29.**

**Note that these curves are dependent on the Principal frequency  $F_N$ , and that this figure shows an example only**

## 10.5.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 31, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.


The observed LCL shall be higher than the lower limits given in figure 21. The LCL values of the associated break frequencies of this figure are given in table 32. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

Reference: TS 101 524 [8], clause 11.3.

Reference: ITU-T Recommendation G.991.2 [9], clause 11.1.

**Table 31: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-50 dBV	4 kHz	100 kHz	400 kHz	100 $\Omega$	150 nF

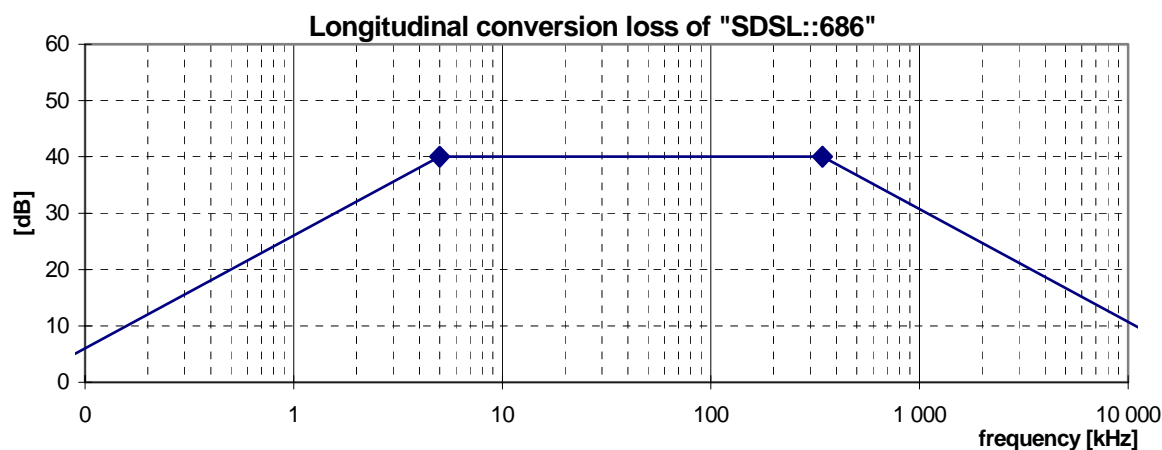

**Figure 21: Minimum longitudinal conversion loss for a "SDSL::686" signal source**

**Table 32: Frequencies and LCL values of the breakpoints of the LCL mask in figure 21**

Frequency	LCL
<0,05 kHz	0 dB
0,05 kHz	0 dB
5 kHz	40 dB
$1/2 \times F_N$	40 dB
$50 \times F_N$	0 dB
30 MHz	0 dB

### 10.5.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for SDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.6 "SDSL.asym::Fn" signals

This category covers signals, generated by multi-rate SDSL transmission equipment on one or two wire pairs. This clause is based on ETSI SDSL standards [8] and on ITU draft Recommendation G.991.2 [9]. The line code modulation used in these standards is Ungerboeck Coded Pulse Amplitude Modulation (UC-PAM), also known as Trellis Coded PAM (TC-PAM).

The SDSL standards specify both symmetric and asymmetric PSD masks. This signal description is dedicated to the symmetric variant. For the asymmetric PSD masks the naming convention is "SDSL.asym::Fn" where the phrase "Fn" is a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing "Fn" in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. A signal with a lower Principal Frequency has a higher inband PSD.

The following four sub classes are defined:

- signal "SDSL.asym::686.NT", dedicated in [8] to 2 048 kbit/s upstream transmission;
- signal "SDSL.asym::686.LT", dedicated in [8] to 2 048 kbit/s downstream transmission;
- signal "SDSL.asym::771.NT", dedicated in [8] to 2 304 kbit/s upstream transmission;
- signal "SDSL.asym::771.LT", dedicated in [8] to 2 304 kbit/s downstream transmission.

Although this signal description is technology independent, several examples on how ETSI SDSL [8] make use of these signals are summarized in table 33. As a result, the bitrates in table 33, and their associated modulation parameters are informative only.

**Table 33: Example on how the four subclasses of this signal category can be used for transporting data. The actual bit rates and modulation parameters are implementation dependent, and informative only**

Signal category	$F_N$ [kHz]	Symbol Rate [kbaud]	Bit/symbol	Line Bit Rate [kbit/s]
SDSL.asym::686.NT	686	685,33	3	2 056
SDSL.asym::686.LT	686	685,33	3	2 056
SDSL.asym::771.NT	771	770,67	3	2 312
SDSL.asym::771.LT	771	770,67	3	2 312

### 10.6.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135Ω shall not exceed a level of  $P_{\max}$ , measured within a frequency band from at least 100 Hz to 3 MHz.  $P_{\max}$  has the following values for the different SDSL signals:

- +16,25 ± 0,5 dBm for "SDSL.asym::686.LT" signals;
- +16,50 ± 0,5 dBm for "SDSL.asym::686.NT" signals;
- +14,75 ± 0,5 dBm for "SDSL.asym::771.LT" signals;
- +15,25 ± 0,5 dBm for "SDSL.asym::771.NT" signals.

Reference: TS 101 524 [8], clause 9.4.2.

Reference: ITU-T Recommendation G.991.2 [9], clauses B.4.1 and B.4.2.

## 10.6.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of  $V_{\text{peak}} (\pm 7 \%)$ , measured within a frequency band from at least 100 Hz to 3 MHz.

$V_{\text{peak}}$  has the following values for the different SDSL signals:

- 16V for "SDSL.asym::686.LT" signals;
- 16V for "SDSL.asym::686.NT" signals;
- 13V for "SDSL.asym::771.LT" signals;
- 13V for "SDSL.asym::771.NT" signals.

The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

## 10.6.3 Narrow-band signal power (upstream only)

This clause is dedicated to "SDSL.asym::686.NT" and "SDSL.asym::771.NT" signals only.

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in the tables in the following clauses, at any point in the frequency range 100 Hz to 30 MHz. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Table 34 gives the break points of the power limits for the upstream asymmetric NBSP limits for the signals "SDSL.asym::686.NT" and "SDSL.asym::771.NT". Figures 22 and 23 illustrate the NBSP in a bandwidth-normalized way.

Reference: TS 101 524 [8], clause 9.4.2.

Reference: ITU-T Recommendation G.991.2 [9], clause B.4.2.

**Table 34: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category**

frequency $f$	Impedance $R$	Signal Level $P$ [dBm]	Noise Bandwidth $B$	Spectral Power $P/B$ [dBm/Hz]
0,1 kHz	135 $\Omega$	$P_0 + 1,4 + 20$	100 Hz	$P_0 + 1,4$
1 kHz	135 $\Omega$	$P_0 + 1,4 + 20$	100 Hz	$P_0 + 1,4$
1 kHz	135 $\Omega$	$P_0 + 1,4 + 30$	1 kHz	$P_0 + 1,4$
10 kHz	135 $\Omega$	$P_0 + 1,4 + 30$	1 kHz	$P_0 + 1,4$
10 kHz	135 $\Omega$	$P_0 + 1,4 + 40$	10 kHz	$P_0 + 1,4$
$0,1 \times F_N$	135 $\Omega$	$P_0 + 1,4 + 40$	10 kHz	$P_0 + 1,4$
$0,275 \times F_N$	135 $\Omega$	$P_0 + 40$	10 kHz	$P_0$
$0,4 \times F_N$	135 $\Omega$	$P_0 - 2 + 40$	10 kHz	$P_0 - 2$
$0,475 \times F_N$	135 $\Omega$	$P_0 - 4,5 + 40$	10 kHz	$P_0 - 4,5$
$0,6 \times F_N$	135 $\Omega$	$P_0 - 15 + 40$	10 kHz	$P_0 - 15$
$0,85 \times F_N$	135 $\Omega$	$P_0 - 45 + 40$	10 kHz	$P_0 - 45$
$0,96 \times F_N$	135 $\Omega$	$P_1 + 40$	10 kHz	$P_1$
1,5 MHz	135 $\Omega$	-65	10 kHz	-105
1,5 MHz	135 $\Omega$	-50	1 MHz	-110
30 MHz	135 $\Omega$	-50	1 MHz	-110

NOTE: The values for the parameters  $F_N$ ,  $P_0$  and  $P_1$  are given in table 35.

Table 35: The power levels and principle frequency for defining NBSP limits in table 34 for upstream asymmetric SDSL signals

	SDSL.asym::686.NT	SDSL.asym::771.NT	
$F_N$	686	771	kHz
$P_0$	-37,7	-39,5	dBm/Hz
$P_1$	-99,5	-100,5	dBm/Hz

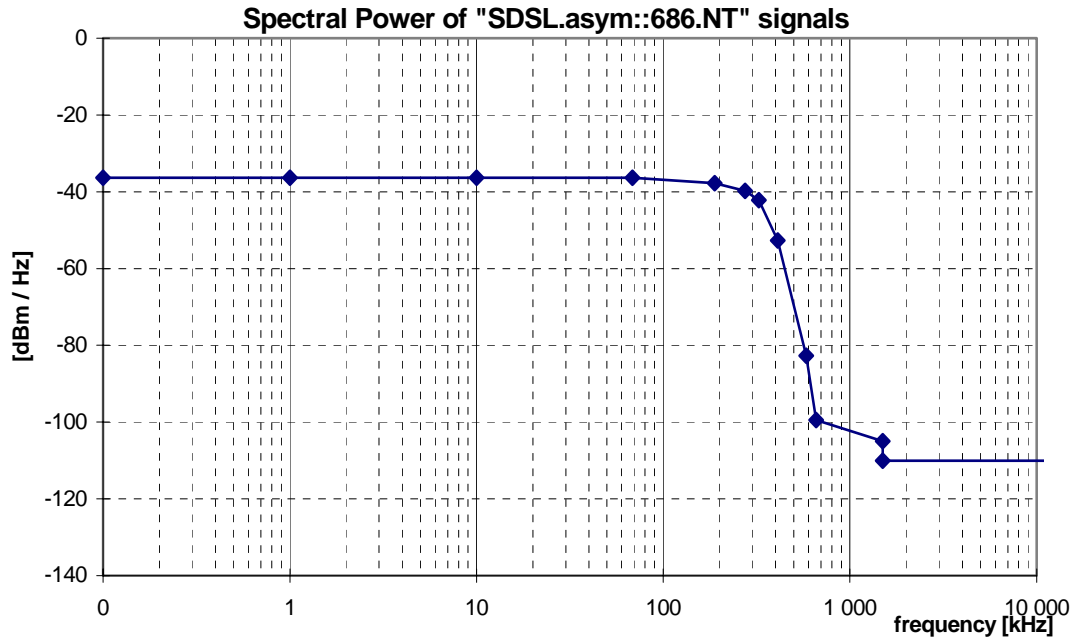


Figure 22: Spectral Power, for an "SDSL.asym::686.NT" signal, as specified in table 34

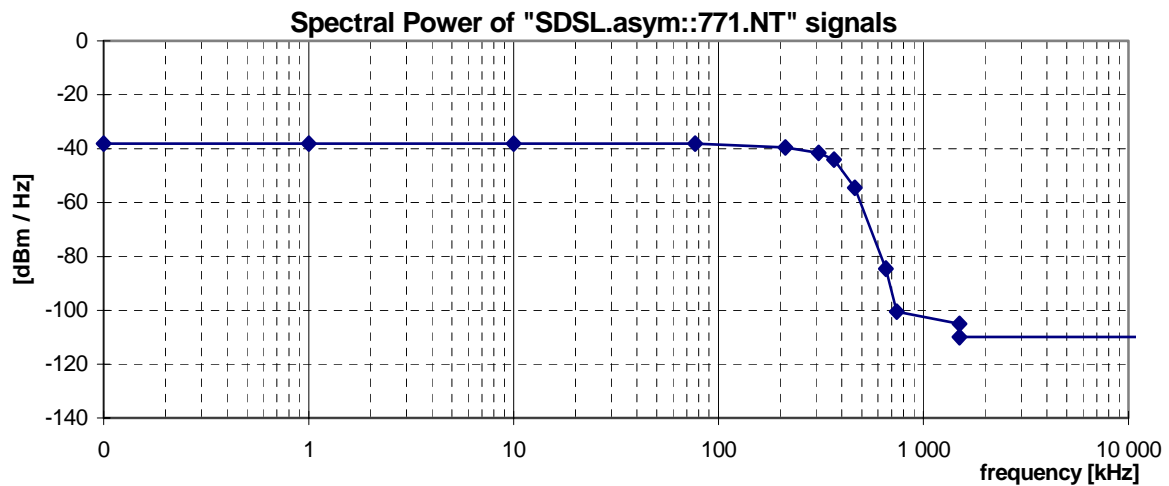


Figure 23: Spectral Power, for a "SDSL.asym::771.NT" signal, as specified in table 34

## 10.6.4 Narrow-band signal power (downstream only)

This clause is dedicated to "SDSL.asym::686.LT" and "SDSL.asym::771.LT" signals only.

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in the tables in the following clauses, at any point in the frequency range 100 Hz to 30 MHz. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Table 36 gives the break points of the power limits for the upstream asymmetric NBSP limits for the signals "SDSL.asym::686.LT" and "SDSL.asym::771.LT". Figures 24 and 25 illustrate the NBSP in a bandwidth-normalized way.

Reference: TS 101 524 [8], clause 9.4.2.

Reference: ITU-T Recommendation G.991.2 [9], clause B.4.2.

**Table 36: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category**

Frequency $f$	Impedance $R$	Signal Level $P$ [dBm]	Noise Bandwidth $B$	Spectral Power $P/B$ [dBm/Hz]
0,1 kHz	135 $\Omega$	$P_0 + 1,4 + 20$	100 Hz	$P_0 + 1,4$
1 kHz	135 $\Omega$	$P_0 + 1,4 + 20$	100 Hz	$P_0 + 1,4$
1 kHz	135 $\Omega$	$P_0 + 1,4 + 30$	1 kHz	$P_0 + 1,4$
10 kHz	135 $\Omega$	$P_0 + 1,4 + 30$	1 kHz	$P_0 + 1,4$
10 kHz	135 $\Omega$	$P_0 + 1,4 + 40$	10 kHz	$P_0 + 1,4$
$0,1 \times F_N \times w$	135 $\Omega$	$P_0 + 1,4 + 40$	10 kHz	$P_0 + 1,4$
$0,3 \times F_N \times w$	135 $\Omega$	$P_0 + 0,25 + 40$	10 kHz	$P_0 + 0,25$
$0,4 \times F_N \times w$	135 $\Omega$	$P_0 - 1,1 + 40$	10 kHz	$P_0 - 1,1$
$0,45 \times F_N \times w$	135 $\Omega$	$P_0 - 2,25 + 40$	10 kHz	$P_0 - 2,25$
$0,5 \times F_N \times w$	135 $\Omega$	$P_0 - 4,5 + 40$	10 kHz	$P_0 - 4,5$
$0,6 \times F_N \times w$	135 $\Omega$	$P_0 - 14 + 40$	10 kHz	$P_0 - 14$
$0,95 \times F_N \times w$	135 $\Omega$	$P_0 - 45 + 40$	10 kHz	$P_0 - 45$
$1,1 \times F_N \times w$	135 $\Omega$	$P_1 + 40$	10 kHz	$P_1$
1,5 MHz	135 $\Omega$	-65	10 kHz	-105
1,5 MHz	135 $\Omega$	-50	1 MHz	-110
30 MHz	135 $\Omega$	-50	1 MHz	-110

NOTE 1: The values for the parameters  $F_N$ ,  $P_0$  and  $P_1$  used in table 36 are given in table 37.

NOTE 2:  $w$  reflects how much "excess bandwidth" is used for the signals.

**Table 37: The Principle frequency and power levels for upstream asymmetric SDSL signals**

	SDSL.asym::686.LT	SDSL.asym::771.LT	
$F_N$	686	771	kHz
$w$	1,6	1,5	
$P_0$	-40,4	-42,2	dBm/Hz
$P_1$	-103,5	-104	dBm/Hz

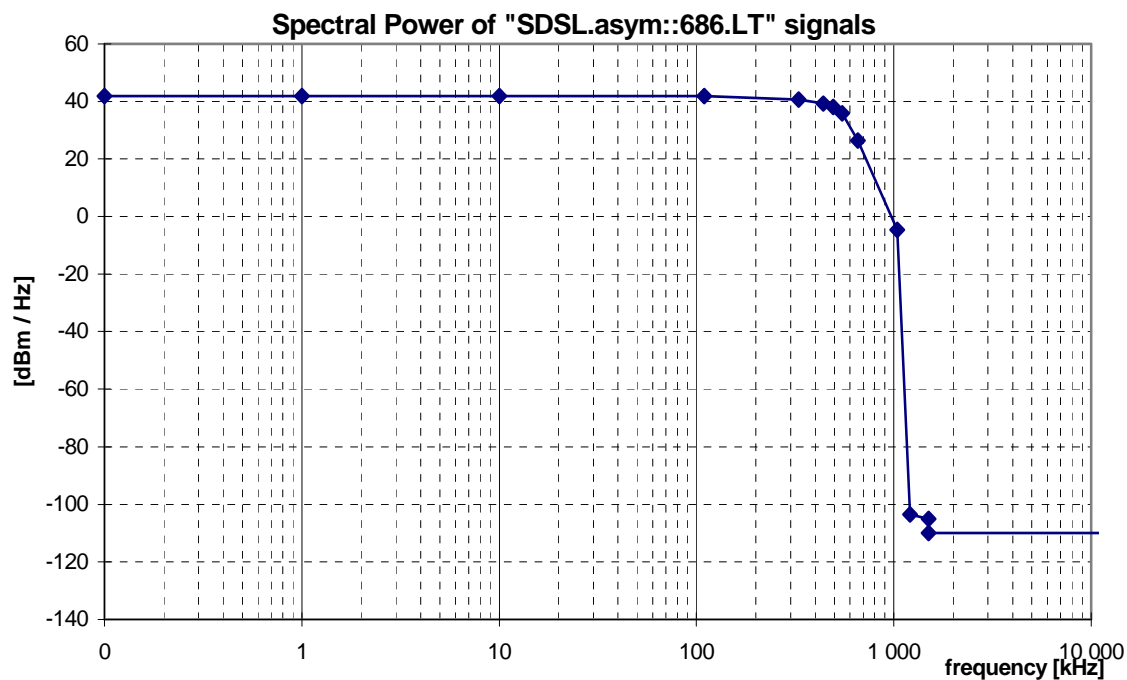


Figure 24: Spectral Power, for "SDSL.asym::686.LT" signal, as specified in table 36

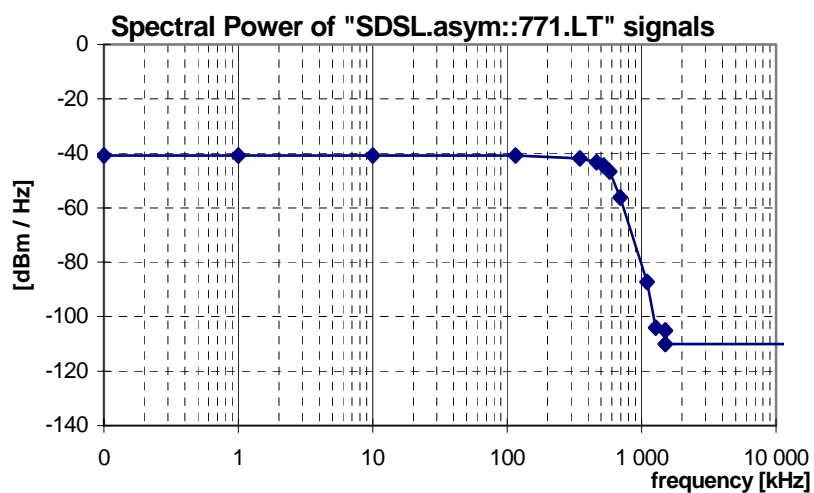


Figure 25: Spectral Power, for "SDSL.asym::771.LT" signal, as specified in table 36

### 10.6.5 Unbalance about earth

As for "SDSL::*F<sub>n</sub>*" signal category.

### 10.6.6 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for SDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.7 "Proprietary.SymDSL.CAP.A::Fn" signals

This category covers signals, generated by Proprietary multi-rate SymDSL transmission equipment on one (or two) wire-pairs. This signal is labelled as *Proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

This signal definition is linecode independent, but dedicated to signals from transmission equipment for variable bit-rate leased lines that are using CAP modulation. These definitions are partly based on the ETSI specifications on HDSL equipment [7].

In the naming convention "Proprietary.SymDSL.CAP.A::Fn", is the phrase "Fn" a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing "Fn" in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the maximum symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. Values between 72 kHz and 387 kHz are commonly used.

Table 38 gives several examples on how to use the naming convention for specifying the actual parameter value  $F_n$ . It also illustrates some (informative) bitrates that can be transported within these signal limits, when using the associated (informative) modulation parameters. These are examples only, other system implementations may use the same signal limits in a different way.

**Table 38: Example on how the naming convention relates to the actual parameter value  $F_N$  that is used in the clauses below to specify the signal limits of this signal category. The bitrates and modulation parameters are informative only, and implementation dependent**

Signal category	$F_N$ [kHz]	Baud Rate [kbaud]	Bit Rate [kbit/s]	Bit/Symbol	Constellation size
Proprietary.SymDSL.CAP.A::72	72	72	144	2	8
Proprietary.SymDSL.CAP.A::91	91	91	272	3	16
Proprietary.SymDSL.CAP.A::133	133	133	400	3	16
Proprietary.SymDSL.CAP.A::176	176	176	528	3	16
Proprietary.SymDSL.CAP.A::261	261	261	784	3	16
Proprietary.SymDSL.CAP.A::261	261	261	1 040	4	32
Proprietary.SymDSL.CAP.A::311	311	311	1 552	5	64
Proprietary.SymDSL.CAP.A::344	344	344	2 064	6	128
Proprietary.SymDSL.CAP.A::387	387	387	2 320	6	128

A signal (per wire-pair) can be classified as a "Proprietary.SymDSL.CAP.A::Fn" signal if it is compliant with all clauses below, *and* if parameter "Fn" is specified by a numerical value.

Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ , and does not apply to the DC remote power feeding (if any).

### 10.7.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 1 MHz.

NOTE: No ETSI deliverable does specify this parameter.

### 10.7.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 6,5 V (13 V peak-peak), measured within a frequency band from at least 100 Hz to 1 MHz. The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.



### 10.7.3 Narrow-band signal power (NBSP)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 39, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 26 illustrates the NBSP in a bandwidth-normalized way.


The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

**Table 39: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category (see table 38)**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,1 kHz	135 $\Omega$	-50 dBm	100 Hz	-70 dBm/Hz
4 kHz	135 $\Omega$	-39 dBm	100 Hz	-59 dBm/Hz
4 kHz	135 $\Omega$	-29 dBm	1 kHz	-59 dBm/Hz
10 kHz	135 $\Omega$	-12 dBm	1 kHz	-42 dBm/Hz
10 kHz	135 $\Omega$	-12 dBm	1 kHz	-42 dBm/Hz
40 kHz	135 $\Omega$	-9 dBm	1 kHz	-39 dBm/Hz
$F_L + F_N$	135 $\Omega$	-9 dBm	1 kHz	-39 dBm/Hz
$F_L + (1 + \alpha/2) \times F_N$	135 $\Omega$	-12 dBm	1 kHz	-42 dBm/Hz
$F_L + (1 + \alpha) \times F_N$	135 $\Omega$	-29 dBm	1 kHz	-59 dBm/Hz
500 kHz	135 $\Omega$	-46 dBm	1 kHz	-76 dBm/Hz
2 MHz	135 $\Omega$	-80 dBm	1 kHz	-110 dBm/Hz
2 MHz	135 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz
30 MHz	135 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz

NOTE: The parameter values for  $F_L$ , and  $\alpha$  are defined as  $F_L = 10$  kHz, and  $\alpha = 0,15$ .

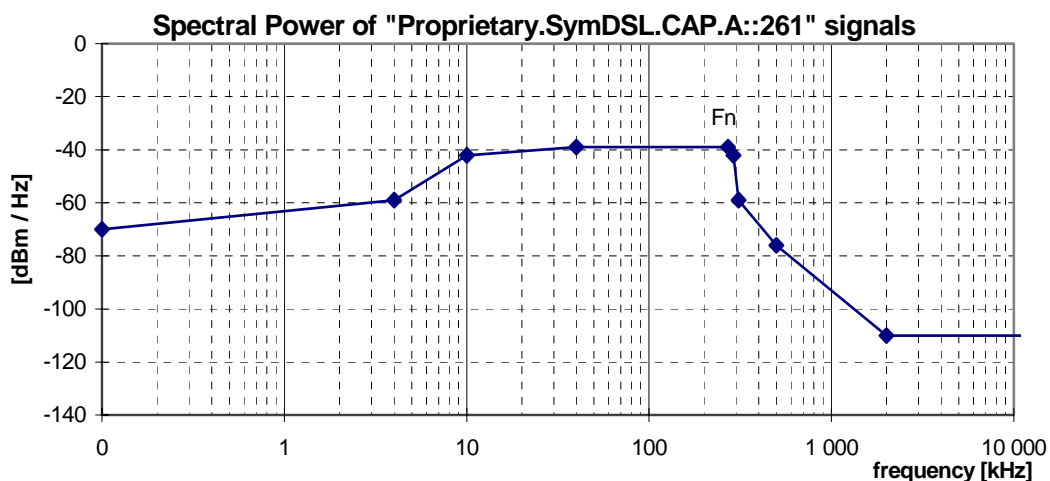

NOTE: These curves are dependent on the Principal frequency  $F_N$ , and that this figure shows an example only.

**Figure 26: Spectral Power, for "Proprietary.SymDSL.CAP.A::261" signals (at  $F_N = 261$  kHz), as specified in table 39**

## 10.7.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.


The observed LOV shall have an rms voltage of below the value specified in table 40, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 27. The LCL values of the associated break frequencies of this figure are given in table 41. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

**Table 40: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	500 kHz	100 $\Omega$	150 nF

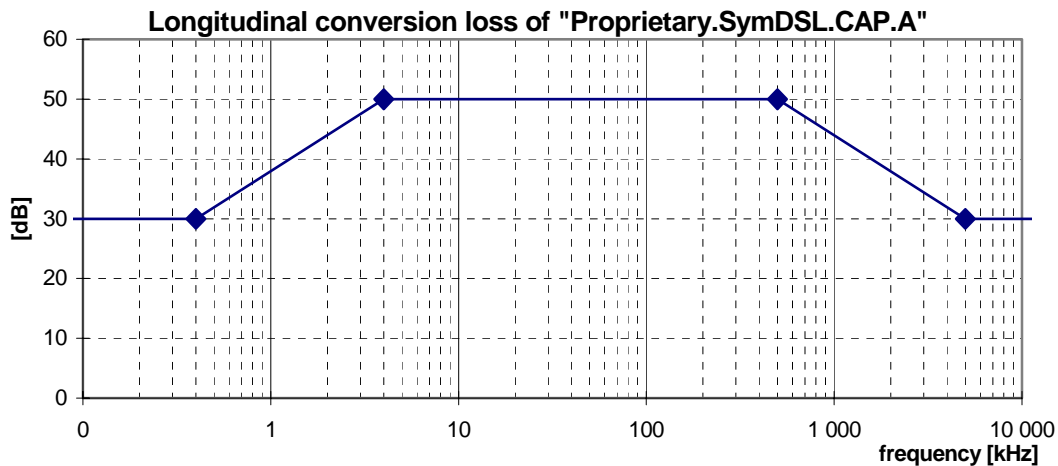

**Figure 27: Minimum longitudinal conversion loss for a "Proprietary.SymDSL.CAP.A::261" signal source**

**Table 41: Frequencies and LCL values of the breakpoints of the LCL mask in figure 27**

Frequency	LCL
< 0,4 kHz	30 dB
4 kHz	50 dB
500 kHz	50 dB
5 MHz	30 dB
30 MHz	30 dB

## 10.8 "Proprietary.SymDSL.CAP.B::Fn" signals

This category covers signals, generated by Proprietary multi-rate SymDSL transmission equipment. This signal is labelled as *proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

The pass-band signal definition is linecode independent, but derived from CAP based HDSL signals defined in annex B of [7]. Their definition is driven by the deployment of proprietary multi-rate symmetric HDSL transmission equipment based on CAP modulation. This category covers other CAP implementation than covered by "Proprietary.SymDSL.CAP.A" signals, without significant advantages or disadvantages.

In the naming convention "Proprietary.SymDSL.CAP.B::Fn", is the phrase "Fn" a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing "Fn" in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the maximum symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. Values between 72 kHz and 387 kHz are commonly used.

Table 42 gives several examples on how to use the naming convention for specifying the actual parameter value  $F_n$ . It also illustrates some (informative) bitrates that can be transported within these signal limits, when using the associated (informative) modulation parameters. These are examples only, other system implementations may use the same signal limits in a different way.

**Table 42: Example on how the naming convention relates to the actual parameter value  $F_N$  that is used in the clauses below to specify the signal limits of this signal category. The bitrates and modulation parameters are informative only, and implementation dependent**

Signal category	$F_N$ [kHz]	Symbol Rate [kBaud]	Bits per Symbol	Bit Rate [kbit/s]	Constellation size
Propriety.SymDSL.CAP.B::72	72	72	4	288	32
Propriety.SymDSL.CAP.B::100	100	100	4	400	32
Propriety.SymDSL.CAP.B::132	132	132	4	528	32
Propriety.SymDSL.CAP.B::196	196	196	4	784	32
Propriety.SymDSL.CAP.B::208	208	208	5	1 040	64
Propriety.SymDSL.CAP.B::310	311	310,4	5	1 552	64
Propriety.SymDSL.CAP.B::344	344	344	6	2 064	128
Propriety.SymDSL.CAP.B::387	387	386,7	6	2 320	128

A signal (per wire-pair) can be classified as a "Proprietary.SymDSL.CAP.B::Fn" signal if it is compliant with all clauses below, *and* if parameter "Fn" is specified by a numerical value.

Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ , and does not apply to the DC remote power feeding (if any).

### 10.8.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 1 MHz.

NOTE: No ETSI deliverable does specify this parameter.

### 10.8.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 7,4 V measured within a frequency band from at least 100 Hz to 1 MHz. The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 10.8.3 Narrow-band signal power (NBSP)


To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 43, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 28 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

**Table 43: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category (see table 42)**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,1 kHz	135 $\Omega$	A - 37 dBm	100 Hz	A - 17 dBm/Hz
4 kHz	135 $\Omega$	A - 37 dBm	100 Hz	A - 17 dBm/Hz
4 kHz	135 $\Omega$	A - 47 dBm	1 kHz	A - 17 dBm/Hz
9 kHz	135 $\Omega$	A - 30 dBm	1 kHz	A dBm/Hz
$F_L + F_N$	135 $\Omega$	A - 30 dBm	1 kHz	A dBm/Hz
$F_L + (1 + \alpha/2) \times F_N$	135 $\Omega$	A - 33 dBm	1 kHz	A - 3 dBm/Hz
$F_L + (1 + \alpha) \times F_N$	135 $\Omega$	A - 50 dBm	1 kHz	A - 20 dBm/Hz
500 kHz	135 $\Omega$	-46 dBm	1 kHz	-76 dBm/Hz
2 MHz	135 $\Omega$	-80 dBm	1 kHz	-110 dBm/Hz
2 MHz	135 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz
30 MHz	135 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz
$F_L = 10$ kHz $\alpha = 0,15$ $A = 13,5 - 10 \times \log_{10}(F_N/F_0) + 1$ dBm/Hz $F_0 = 1$ Hz				

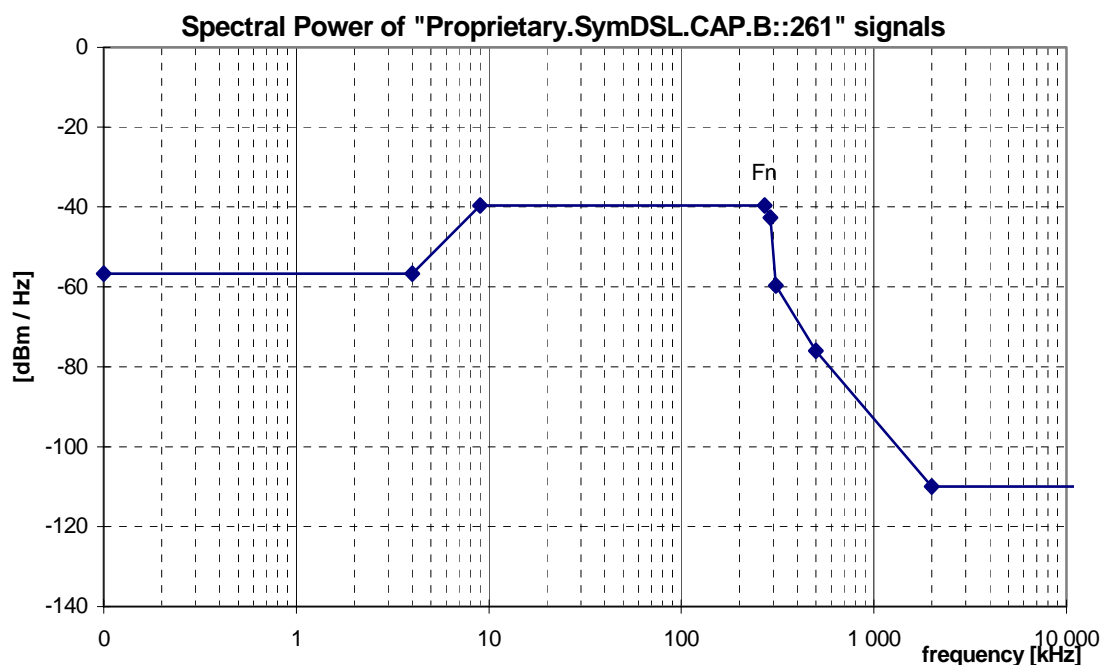

NOTE: These curves are dependent on the Principal frequency  $F_N$ , and that this figure shows an example only.

**Figure 28: Spectral Power, for "Proprietary.SymDSL.CAP.B::261" signals (at  $F_N = 261$  kHz), as specified in table 43**

## 10.8.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.


The observed LOV shall have an rms voltage of below the value specified in table 44, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 29. The LCL values of the associated break frequencies of this figure are given in table 45. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

**Table 44: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 BV	10 kHz	5,1 kHz	500 kHz	100 $\Omega$	150 nF

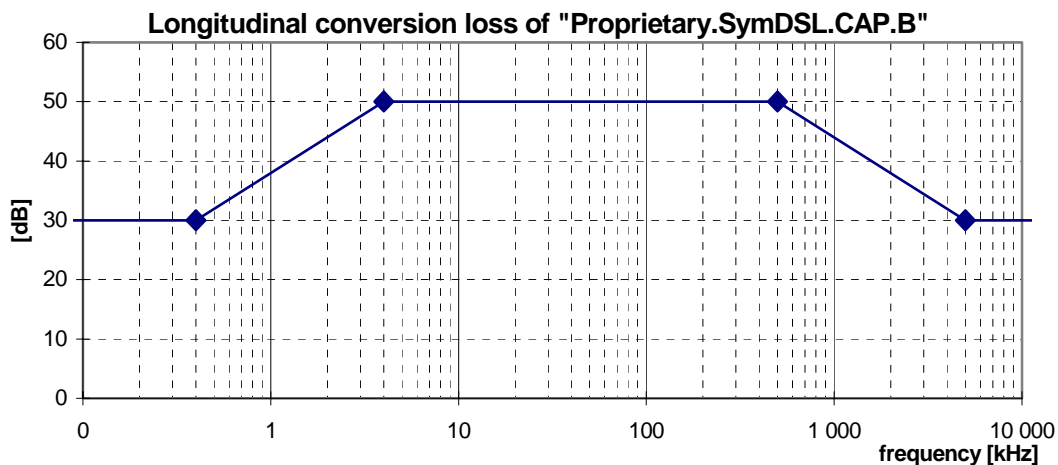

**Figure 29: Minimum longitudinal conversion loss for a "Proprietary.SymDSL.CAP.B::261" signal source**

**Table 45: Frequencies and LCL values of the breakpoints of the LCL mask in figure 29**

Frequency	LCL
<0,4 kHz	30 dB
4 kHz	50 dB
500 kHz	50 dB
5 MHz	30 dB
30 MHz	30 dB

## 10.9 "Proprietary.SymDSL.CAP.C::Fn" signals

This category covers signals, generated by Proprietary multi-rate SymDSL transmission equipment on one wire-pair. This signal is labelled as *Proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

This signal definition is linecode independent, but dedicated to signals from transmission equipment for variable bit-rate leased lines that are using CAP or QAM modulation.

In the naming convention "Proprietary.SymDSL.CAP.C::Fn", is the phrase "Fn" a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing "Fn" in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the maximum symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. Values between 72 kHz and 128 kHz are commonly used.

Table 46 gives several examples on how to use the naming convention for specifying the actual parameter value  $F_N$ . It also illustrates some (informative) bitrates that can be transported within these signal limits, when using the associated (informative) modulation parameters. These are examples only, other system implementations may use the same signal limits in a different way.

**Table 46: Example on how the naming convention relates to the actual parameter value  $F_N$  that is used in the clauses below to specify the signal limits of this signal category. The bitrates and modulation parameters are informative only, and implementation dependent**

Signal category	$F_N$ [kHz]	Baud Rate [kbaud]	Bit Rate [kbit/s]	Bit/Symbol	Constellation size
Proprietary.SymDSL.CAP.C::72	72	72	144	2	8
Proprietary.SymDSL.CAP.C::88	88	88	264	3	16
Proprietary.SymDSL.CAP.C::96	96	96	288	3	16
Proprietary.SymDSL.CAP.C::112	112	112	336	3	16
Proprietary.SymDSL.CAP.C::128	128	128	384	3	16

A signal can be classified as a "Proprietary.SymDSL.CAP.C::Fn" signal if it is compliant with all clauses below, *and* if parameter "Fn" is specified by a numerical value.

Unless otherwise indicated, the following signal specifications apply with a resistive load impedance of 135  $\Omega$ .

### 10.9.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to 1 MHz.

NOTE: No ETSI deliverable does specify this parameter.

### 10.9.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of 7,5 V (15 V peak-peak), measured within a frequency band from at least 100 Hz to 1 MHz.

The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 10.9.3 Narrow-Band Signal Power (NBSP)


To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 47, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 30 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

**Table 47: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category (see table 46)**

Centre frequency $f$	Impedance $R$	Signal Level $P$ (dBm)	Power bandwidth $B$	Spectral Power $P/B$ (dBm/Hz)	
510 Hz	135 $\Omega$	-56	1 kHz	-86	A
4 kHz	135 $\Omega$	-56	1 kHz	-86	
10 kHz	135 $\Omega$	-30	1 kHz	-60	
10 kHz	135 $\Omega$	-20	10 kHz	-60	
$0,12 \times F_N + F_L$	135 $\Omega$	$+7,6 - 0,380 \times f/f_0$	10 kHz	$-32,4 - 0,380 \times f/f_0$	
$0,23 \times F_N + F_L$	135 $\Omega$	$+11,4 - 0,184 \times f/f_0$	10 kHz	$-28,6 - 0,184 \times f/f_0$	
$0,66 \times F_N + F_L$	135 $\Omega$	$+11,2 - 0,0792 \times f/f_0$	10 kHz	$-28,8 - 0,0792 \times f/f_0$	
$1,06 \times F_N + F_L$	135 $\Omega$	$+4,3 - 0,0128 \times f/f_0$	10 kHz	$-35,7 - 0,0128 \times f/f_0$	
$3,50 \times F_N$	135 $\Omega$	$-38,2 - 0,0121 \times f/f_0$	10 kHz	$-78,2 - 0,0121 \times f/f_0$	
$3,90 \times F_N$	135 $\Omega$	$-38,2 - 0,0108 \times f/f_0$	10 kHz	$-78,2 - 0,0108 \times f/f_0$	
$(-161 \times F_N + 0,295 \times F_N^2) / (-31,8 + 0,0421 \times F_N)$	135 $\Omega$	-50	10 kHz	-90	
30 MHz	135 $\Omega$	-50	10 kHz	-90	
$(-161 \times F_N + 0,295 \times F_N^2) / (-31,8 + 0,0421 \times F_N)$	135 $\Omega$	-30	1 MHz	-90	B
$7,00 \times F_N$	135 $\Omega$	-50	1 MHz	-110	
30 MHz	135 $\Omega$	-50	1 MHz	-110	
$F_L = 10\text{kHz}$		$f = \text{centre freq (Hz)}$		$f_0 = 1 \text{ kHz}$	
$F_Q = \left( \frac{-161 \times F_N + 0,295 \times F_N^2}{-31,8 + 0,0421 \times F_N} \right)$					

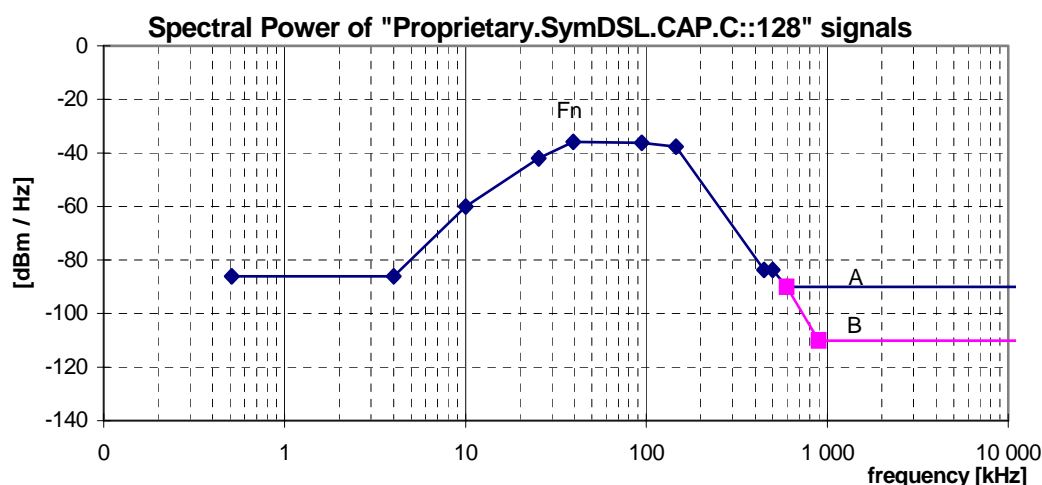

NOTE: These curves are dependent on the Principal frequency  $F_N$ , and that this figure shows an example only.

**Figure 30: Spectral Power, for "Proprietary.SymDSL.CAP.C::128" signals (at  $F_N = 128 \text{ kHz}$ ), as specified in table 47**

## 10.9.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clauses 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clauses 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.


The observed LOV shall have an rms voltage of below the value specified in table 48, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 31. The LCL values of the associated break frequencies of this figure are given in table 49. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

**Table 48: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 BV	10 kHz	5,1 kHz	225 kHz	100 $\Omega$	150 nF

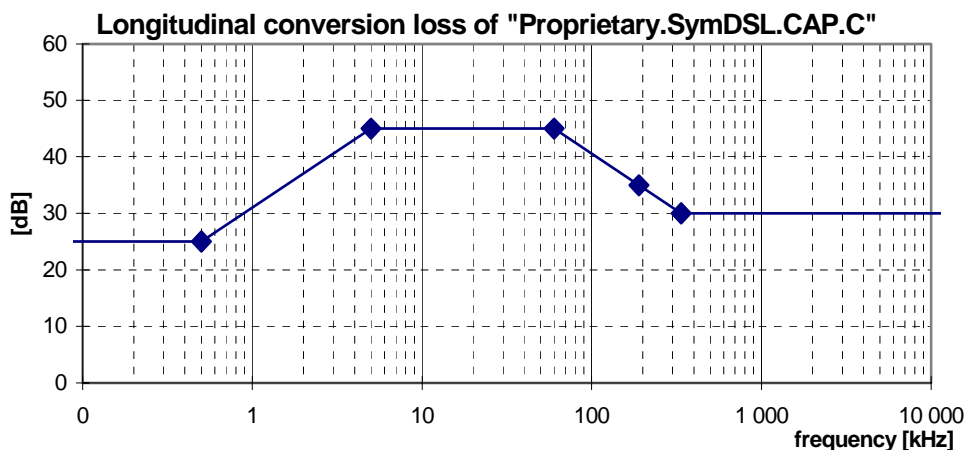

**Figure 31: Minimum longitudinal conversion loss for a "Proprietary.SymDSL.CAP.C::Fn" signal source**

**Table 49: Frequencies and LCL values of the breakpoints of the LCL mask in figure 31**

Frequency	LCL
< 0,5 kHz	25 dB
5 kHz	45 dB
60 kHz	45 dB
190 kHz	35 dB
337 kHz	30 dB
30 MHz	30 dB



## 10.10 "Proprietary.SymDSL.PAM:: $F_N$ " signals

This category covers signals, generated by Proprietary multi-rate SymDSL transmission equipment on a single wire pair. This signal is labelled as *Proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

This signal definition is linecode independent, but dedicated to signals from transmission equipment that are using PAM modulation.

In the naming convention "Proprietary.SymDSL.PAM:: $F_N$ ", is the phrase " $F_N$ " a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing " $F_N$ " in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the maximum symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. The clauses below are defined for all Principal frequencies between 80 kHz and 264 kHz.

Table 50 gives several examples on how to use the naming convention for specifying the actual parameter value  $F_N$ . It also illustrates some (informative) bitrates that can be transported within these signal limits, when using the associated (informative) modulation parameters. These are examples only, other system implementations may use the same signal limits in a different way.

**Table 50: Naming convention for parameter  $F_N$**

Signal category	$F_N$ [kHz]	Baud Rate [kbaud]	Bit/symbol	Bit Rate [kbit/s]
<b>Proprietary.SymDSL.PAM::<b>80</b></b>	80 kHz	80	2	160
<b>Proprietary.SymDSL.PAM::<b>258</b></b>	258 kHz	258	4	1 032
<b>Proprietary.SymDSL.PAM::<b>264</b></b>	264 kHz	264	3	792
NOTE: Example on how the naming convention relates to the actual parameter value $F_N$ that is used in the clauses below to specify the signal limits of this signal category. The actual bitrates and modulation parameters are implementation dependent, and informative only. They are included here to illustrate that different bitrates can be carried by signals having the same Principal frequency.				

Two slightly different additional variants are identified for all signals with specified Principal Frequency:

- option A signals, are dedicated to Ungerboeck Coded PAM with 2, 3 or 4 bits per symbol (before encoding);
- option B signals, are dedicated to 2B1Q linecoded signals.

A signal can be classified as a "Proprietary.SymDSL.PAM:: $F_N$ " signal if it is compliant with all clauses below **and** if parameter " $F_N$ " is specified by a numerical value.

NOTE: The narrow band signal power (NBSP) of "Proprietary.SymDSL.PAM:: $F_N$ " signals, having a Principal frequency between 80 kHz to 141,3 kHz, also fit under the NBSP mask of ISDN.2B1Q signals. This does not hold for the Peak amplitude and Unbalance about earth, so these signal limits are not 100 % compliant with ISDN.2B1Q signals.

### 10.10.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to  $2 \times F_N$ .

NOTE: No ETSI deliverable does specify this parameter.

## 10.10.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of  $135 \Omega$  shall not exceed a level of  $V_{\text{peak}} (\pm 7 \%)$ , measured within a frequency band from at least 100 Hz to  $F_N \times 2$ .

Two signal options have been defined, that are different only in their  $V_{\text{peak}}$  specification:

- for "option A" signals,  $V_{\text{peak}}$  shall not exceed 3,4 V (6,8 V peak-peak) (*dedicated to Ungerboeck Coded PAM*);
- for "option B" signals,  $V_{\text{peak}}$  shall not exceed 2,64 V (5,28 V peak-peak) (*dedicated to 2B1Q linecoded signals*).

The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

## 10.10.3 Narrow-Band Signal Power (NBSP)

To be compliant with this signal category, the Narrow-Band Signal Power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in tables 51 and 52, at any point in the frequency range 100 Hz to 30 MHz. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Table 51 describes the break points of these limits in a general way, table 52 specifies the associated parameters for all Principal frequencies between 80 kHz and 264 kHz. Figure 32 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.


NOTE: No ETSI deliverable does specify this parameter.

**Table 51: Break points of the narrow-band signal power  $P$ , as a function of the Principal frequency  $F_N$  of the signal category (see table 50)**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,1 kHz	135 $\Omega$		100 Hz	$SP_1(F_N)$
1 kHz	135 $\Omega$		100 Hz	$SP_1(F_N)$
1 kHz	135 $\Omega$	$P_{1,1k}(F_N)$	1 kHz	$SP_1(F_N)$
10 kHz	135 $\Omega$	$P_{1,1k}(F_N)$	1 kHz	$SP_1(F_N)$
10 kHz	135 $\Omega$	$P_{1,10k}(F_N)$	10 kHz	$SP_1(F_N)$
$F_1(F_N)$	135 $\Omega$	$P_{1,10k}(F_N)$	10 kHz	$SP_1(F_N)$
$F_2(F_N)$	135 $\Omega$	$P_{2,10k}(F_N)$	10 kHz	$SP_2(F_N)$
$F_3(F_N)$	135 $\Omega$	-77 dBm	10 kHz	-117 dBm/Hz
$F_3(F_N)$	135 $\Omega$	-57 dBm	1 MHz	-117 dBm/Hz
30 MHz	135 $\Omega$	-57 dBm	1 MHz	-117 dBm/Hz
NOTE: The parameter values for $F_1, F_2, F_3, P_{1,1k}, P_{1,10k}, P_{2,10k}, SP_1, SP_2$ , are defined for each $F_N$ in table 52.				

**Table 52: Definition of all Principal-frequency-dependent parameters that are used in table 51, for all Principal frequencies between 80 kHz and 264 kHz**

$F_N$ [kHz]	F1	F2	F3	SP1 [dBm/Hz]	P1,1k [dBm]	P1,10k [dBm]	SP2 [dBm/Hz]	P2,1k [dBm]	P2,10k [dBm]
$80 \leq F_N < 92$	$1/4 \times F_N$	$3/4 \times F_N$	$5,5 \times F_N$	-30,0	0,0	+10	-38,0	-8,0	+2,0
$92 \leq F_N < 104$	$1/4 \times F_N$	$3/4 \times F_N$	$5,5 \times F_N$	-30,5	-0,5	+9,5	-38,5	-8,5	+1,5
$104 \leq F_N < 116$	$1/4 \times F_N$	$3/4 \times F_N$	$5,5 \times F_N$	-31,0	-1,0	+9,0	-39,0	-9,0	+1,0
$116 \leq F_N < 129$	$1/4 \times F_N$	$3/4 \times F_N$	$5 \times F_N$	-31,5	-1,5	+8,5	-39,5	-9,5	+0,5
$129 \leq F_N < 146$	$1/4 \times F_N$	$3/4 \times F_N$	$5 \times F_N$	-32,0	-2,0	+8,0	-40,0	-10,0	0,0
$146 \leq F_N < 164$	$1/4 \times F_N$	$3/4 \times F_N$	$5 \times F_N$	-32,5	-2,5	+7,5	-40,5	-10,5	-0,5
$164 \leq F_N < 185$	$1/4 \times F_N$	$3/4 \times F_N$	$5 \times F_N$	-33,0	-3,0	+7,0	-41,0	-11,0	-1,0
$185 \leq F_N < 207$	$1/4 \times F_N$	$2/3 \times F_N$	$4,5 \times F_N$	-33,5	-3,5	+6,5	-41,5	-11,5	-1,5
$207 \leq F_N < 232$	$1/4 \times F_N$	$2/3 \times F_N$	$4 \times F_N$	-34,0	-4,0	+6,0	-42,0	-12,0	-2,0
$232 \leq F_N < 259$	$1/4 \times F_N$	$2/3 \times F_N$	$3,5 \times F_N$	-34,5	-4,5	+5,5	-42,5	-12,5	-2,5
$259 \leq F_N \leq 264$	$1/4 \times F_N$	$2/3 \times F_N$	$3,5 \times F_N$	-35,0	-5,0	+5,0	-43,0	-13,0	-3,0

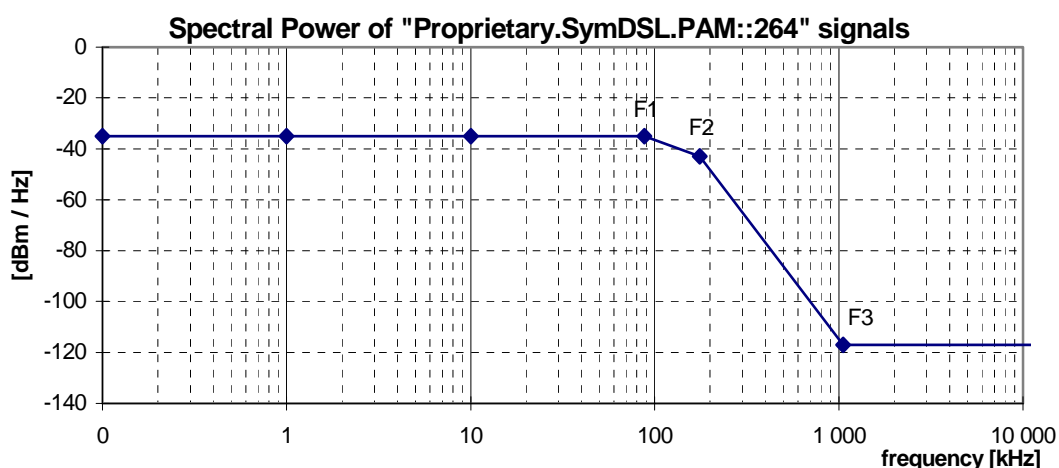

NOTE: These curves are dependent on the Principal frequency  $F_N$ , and that this figure shows an example only.

**Figure 32: Spectral Power, for "Proprietary.SymDSL.PAM::264" signals (at  $F_N = 264$  kHz), as specified in tables 51 and 52**

#### 10.10.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clause 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clause 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.


The observed LOV shall have an rms voltage of below the value specified in table 53, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 33. The LCL values of the associated break frequencies of this figure are given in table 54. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

**Table 53: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	500 kHz	100 $\Omega$	150 nF

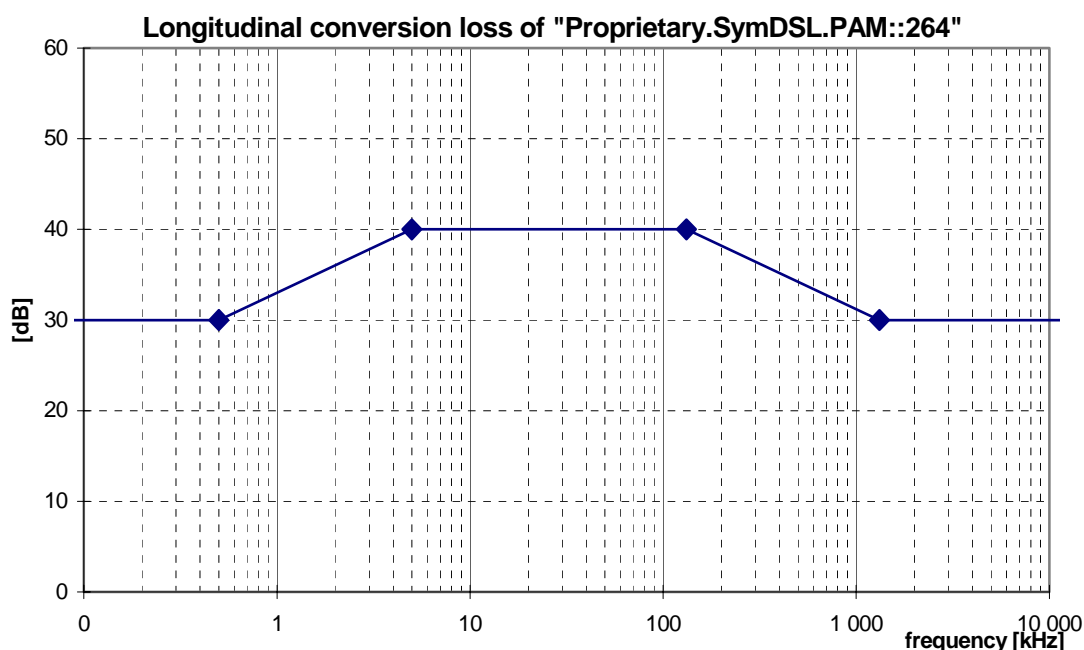

**Figure 33: Minimum longitudinal conversion loss for a "Proprietary.SymDSL.PAM::264" signal source**

**Table 54: Frequencies and LCL values of the breakpoints of the LCL mask in figure 33**

Frequency	LCL
< 0,5 kHz	slope: +20 dB/decade
5 kHz	40 dB
$1/2 \times F_N$	40 dB
$> 1/2 \times F_N$	slope: -20 dB/decade

### 10.10.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for SymDSL based services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.11 "Proprietary.SymDSL.2B1Q::Fn" signals

This category covers signals, generated by Proprietary multi-rate SymDSL transmission equipment on one, two, or three wire pairs. This signal is labelled as *Proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

This signal definition is linecode independent, but dedicated to signals from transmission equipment that are using 2B1Q modulation (4-level PAM). The use of other line codes is not precluded.

In the naming convention "Proprietary.SymDSL.2B1Q::Fn", is the phrase "Fn" a placeholder for a number that is used as parameter  $F_N$  in the signal definition. Replacing "Fn" in the signal name by a value, changes the generic signal description into a specific description, since its value is required in the clauses below. It is referred to as the *Principal frequency* of the signal.

The Principal frequency  $F_N$  is indicative for the maximum symbol rate [kbaud] that can be transported within these signal limits. A signal with a higher Principal Frequency occupies a wider spectrum. The clause below are defined for all Principal frequencies between 32 kHz and 1 160 kHz.

Table 55 gives several examples on how to use the naming convention for specifying the actual parameter value  $F_n$ . It also illustrates some (informative) bit rates that can be transported within these signal limits, when using the associated (informative) modulation parameters. These are examples only, other system implementations may use the same signal limits in a different way.

**Table 55: Naming convention for parameter  $F_N$**

Signal category	$F_N$ [kHz]	Symbol Rate [kbaud]	Bit/symbol	Bit Rate [kbit/s]
<b>Proprietary.SymDSL.2B1Q::80</b>	80	80	2	160
<b>Proprietary.SymDSL.2B1Q::1 160</b>	1 160	1 160	2	2 320

NOTE: Example on how the naming convention relates to the actual parameter value  $F_N$  that is used in the clauses below to specify the signal limits of this signal category. The actual bitrates and modulation parameters are implementation dependent, and informative only.

### 10.11.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 135  $\Omega$  shall not exceed a level of +14 dBm, measured within a frequency band from at least 100 Hz to  $2 \times F_N$ .

NOTE: No ETSI deliverable does specify this parameter.

### 10.11.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 135  $\Omega$  shall not exceed a level of  $V_{\text{peak}} = 5 \text{ V} (\pm 7 \%)$ , measured within a frequency band from at least 100 Hz to  $F_N \times 2$ . The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 10.11.3 Narrow-Band Signal Power (NBSP)

To be compliant with this signal category, the Narrow-Band Signal Power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 57, at any point in the frequency range 100 Hz to 30 MHz. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Table 51 describes the break points of these limits for all Principal frequencies between 32 kHz and 1 160 kHz. Figure 34 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

**Table 56: Break points of the narrow-band signal power P, as a function of the Principal frequency  $F_N$  of the signal category**


frequency f	Impedance R	Signal Level P [dBm]	Noise Bandwidth B	Spectral Power P/B [dBm/Hz]
0,1 kHz	135 $\Omega$	$P_0 + 3,5 + 20$	100 Hz	$P_0 + 3,5$
1 kHz	135 $\Omega$	$P_0 + 3,5 + 20$	100 Hz	$P_0 + 3,5$
1 kHz	135 $\Omega$	$P_0 + 3,5 + 30$	1 kHz	$P_0 + 3,5$
10 kHz	135 $\Omega$	$P_0 + 3,5 + 30$	1 kHz	$P_0 + 3,5$
10 kHz	135 $\Omega$	$P_0 + 3,5 + 40$	10 kHz	$P_0 + 3,5$
$0,2 \times F_N$	135 $\Omega$	$P_0 + 3,5 + 40$	10 kHz	$P_0 + 3,5$
$0,5 \times F_N$	135 $\Omega$	$P_0 + 1,0 + 40$	10 kHz	$P_0 + 1,0$
$0,75 \times F_N$	135 $\Omega$	$P_0 - 9,5 + 40$	10 kHz	$P_0 - 9,5$
$1 \times F_N$	135 $\Omega$	$P_0 - 31,5 + 40$	10 kHz	$P_0 - 31,5$
$1,5 \times F_N$	135 $\Omega$	$P_0 - 35 + 40$	10 kHz	$P_0 - 35$
$3,5 \times F_N$	135 $\Omega$	$P_0 - 72,5 + 40$	10 kHz	$P_0 - 72,5$
$6 \times F_N$	135 $\Omega$	-70	10 kHz	-110
$6 \times F_N$	135 $\Omega$	-50	1 MHz	-110
30 MHz	135 $\Omega$	-50	1 MHz	-110

The reference power level,  $P_0$ , in table 56 is given by the formula below. Its value has been evaluated for a few sample Principal frequencies.

$$P_0 = 10 \log_{10} \left( \frac{2,65^2}{135} \times \frac{1 \text{ kHz}}{F_N} \right)$$

**Table 57: Reference power levels, as a function of the Principle frequency**

$F_N$	80	264	520	1 160	kHz
$P_0$	-31,87	-37,05	-40	-43,48	dBm/Hz
NOTE:	The table summarizes some sample values, calculated from this formula.				

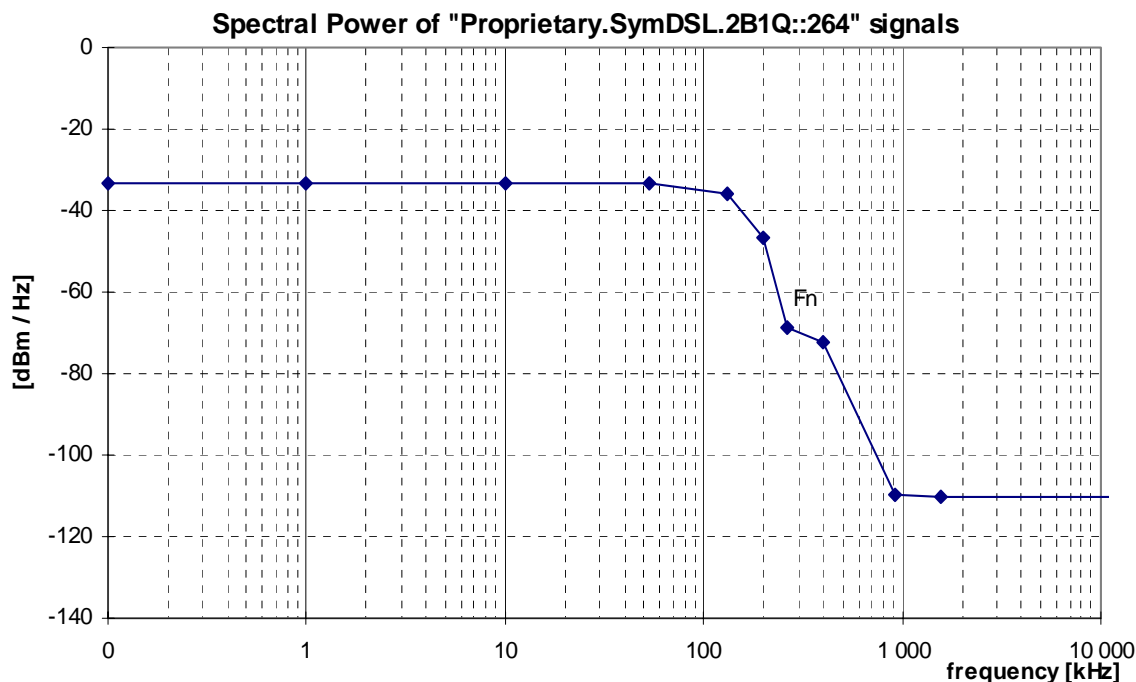

NOTE: These curves are dependent on the Principal frequency  $F_N$ , and that this figure shows an example only.

**Figure 34: Spectral Power, for "Proprietary.SymDSL.2B1Q::264" signals (at  $F_N = 264$  kHz), as specified in table 51**

#### 10.11.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clause 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clause 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.


The observed LOV shall have an rms voltage of below the value specified in table 58, measured in a *power* bandwidth  $B$ , centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 35. The LCL values of the associated break frequencies of this figure are given in table 59. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

**Table 58: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-50 dBV	4 kHz	100 kHz	400 kHz	100 $\Omega$	150 nF

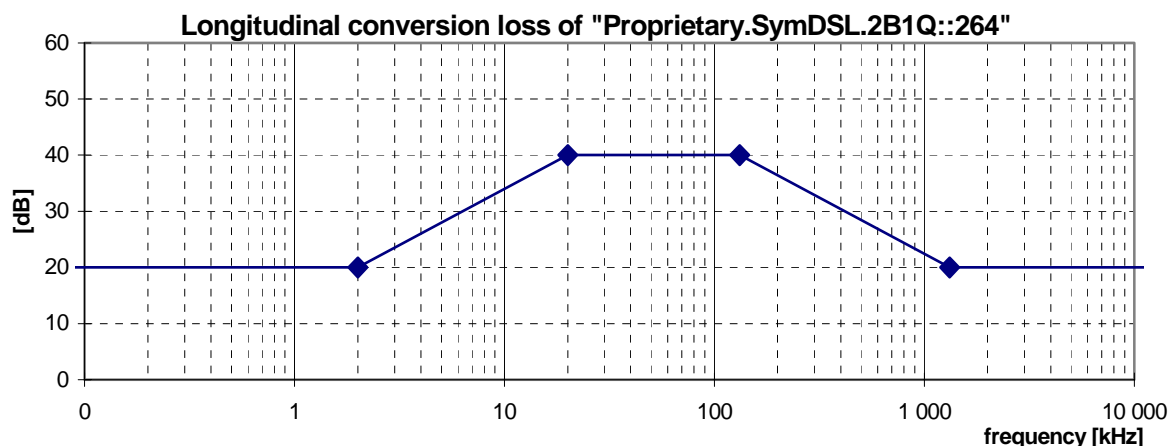

**Figure 35: Minimum longitudinal conversion loss  
for a "Proprietary.SymDSL.2B1Q::264" signal source**

**Table 59: Frequencies and LCL values of the breakpoints of the LCL mask in figure 35**

Frequency	LCL
<2 kHz	20 dB
2 kHz	20 dB
20 kHz	40 dB
$1/2 \times F_N$	40 dB
$5 \times F_N$	20 dB
30 MHz	20 dB

### 10.11.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for SymDSL services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.12 "Proprietary.PCM.HDB3.2M.SR" signals

This category covers signals generated by 2 Mbit/s transmission equipment on two wire-pairs, usable for instance for ISDN-Primary Rate Access. This category includes HDB3 line coding and *sine* shaped transmit pulses in case of sending a randomised bit sequence. This signal is labelled as *proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

A signal can be classified as a "Proprietary.PCM.HDB3.2M.SR" signal if it is compliant with all clauses below.

**NOTE:** The signals covered here are only applicable to systems which are using *sine shaped transmit pulses* and in case of *sending a randomised bit sequence*.

Special bit sequences like AIS (Alarm Indication Signal) or others and other transmit pulse forms than described here can cause different signals. The way these characteristics are to be covered by specifications, are for further study.

### 10.12.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 130  $\Omega$  shall not exceed a level of +11 dBm ( $\pm 0,5$  dBm), measured within a frequency band from at least 100 Hz to 20 MHz.

**NOTE:** No ETSI deliverable does specify this parameter.



## 10.12.2 Peak amplitude

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of  $130\ \Omega$  shall not exceed a level of  $2,36\ \text{V}$  ( $\pm 10\%$ ), measured within a frequency band from at least  $100\ \text{Hz}$  to  $20\ \text{MHz}$ . The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

## 10.12.3 Narrow-band signal power


To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 60, at any point in the frequency range  $100\ \text{Hz}$  to  $30\ \text{MHz}$ . This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 36 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

**Table 60: Break points of the narrow-band power limits**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$
0,51 kHz	$130\ \Omega$	-49,8 dBm	100 Hz	-69,8 dBm/Hz
10 kHz	$130\ \Omega$	-42 dBm	100 Hz	-62 dBm/Hz
10 kHz	$130\ \Omega$	-22 dBm	10 kHz	-62 dBm/Hz
1 MHz	$130\ \Omega$	-10 dBm	10 kHz	-50 dBm/Hz
20 MHz	$130\ \Omega$	-59 dBm	10 kHz	-99 dBm/Hz
20 MHz	$130\ \Omega$	-80 dBm	10 kHz	-120 dBm/Hz
30 MHz	$130\ \Omega$	-80 dBm	10 kHz	-120 dBm/Hz
20 MHz	$130\ \Omega$	-60 dBm	1 MHz	-120 dBm/Hz
30 MHz	$130\ \Omega$	-60 dBm	1 MHz	-120 dBm/Hz

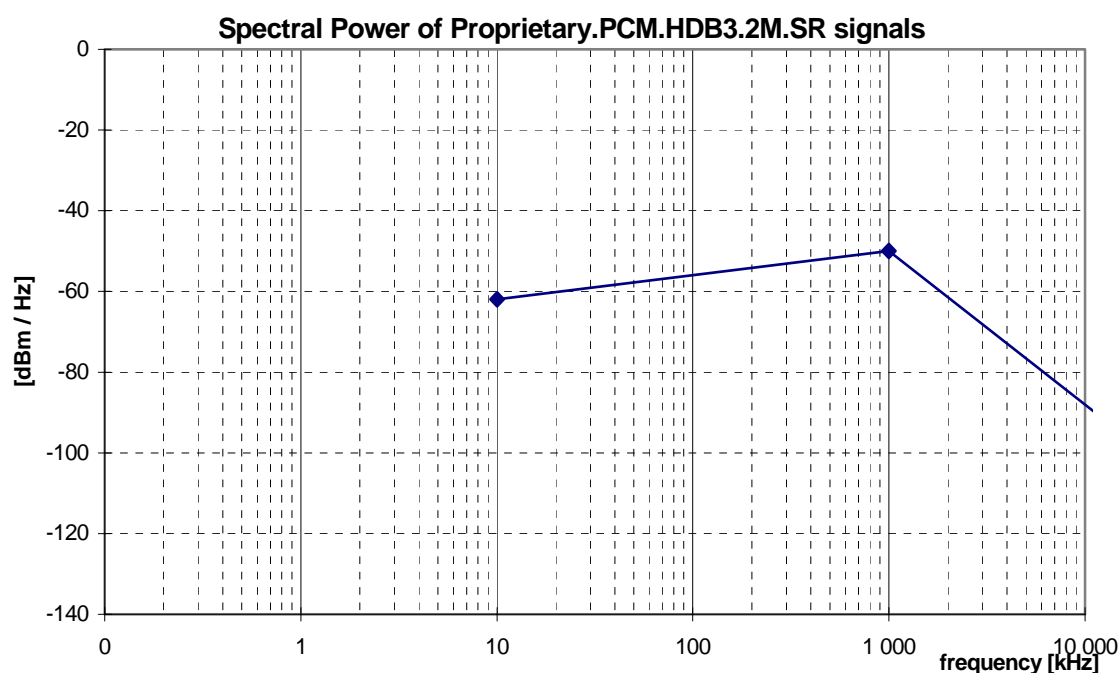

**Figure 36: Spectral Power, for Proprietary.PCM.HDB3.2M.SR signals, as specified in table 60**

## 10.12.4 Unbalance about earth

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clause 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clause 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 135 \Omega$  of the Signal Source under test.


The observed LOV shall have an rms voltage of below the value specified in table 61, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 62. The LCL values of the associated break frequencies of this figure are given in table 62. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss.

NOTE: No ETSI deliverable does specify this parameter.

**Table 61: Values for the LOV limits**

LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
-46 dBV	10 kHz	5,1 kHz	2,15 MHz	100 $\Omega$	150 nF

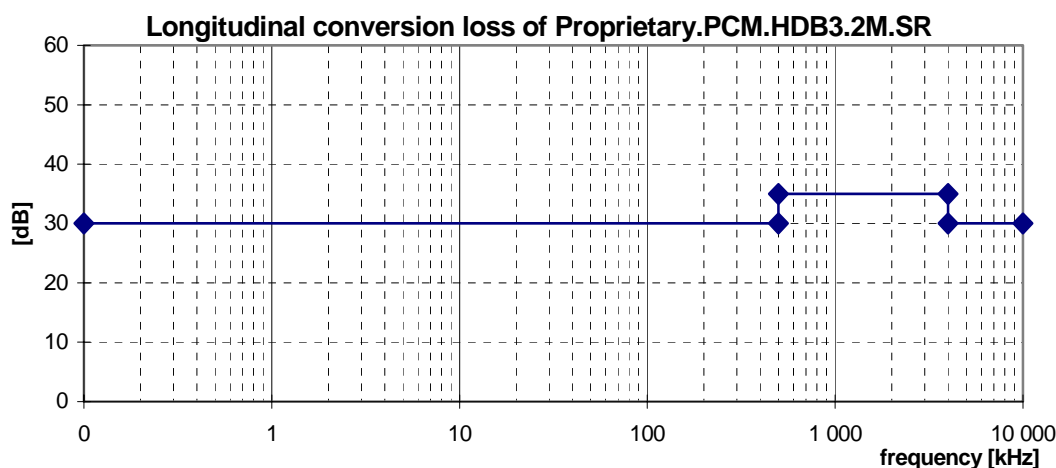

**Figure 37: Minimum longitudinal conversion loss for a "Proprietary.PCM.HDB3.2M.SR" signal source**

**Table 62: Frequencies and LCL values of the breakpoints of the LCL mask in figure 37**

Frequency range	LCL
< 500 kHz	30 dB
500 kHz	35 dB
1 MHz	35 dB
4 MHz	35 dB
30 MHz	30 dB

### 10.12.5 Feeding power (from the LT-port)

Power feeding is no integral part of this signal category, although it is not uncommon for PCM.HDB3 services. To enable power feeding in combination with this signal category, refer to one of the power feeding classes summarized in clause 7.

## 10.13 "Proprietary.PCM.HDB3.2M.SQ" signals

This category covers signals generated by 2 Mbit/s transmission equipment on two wire-pairs, usable for instance for ISDN-Primary Rate Access. This category include HDB3 line coding and **square** shaped transmit pulses in case of sending a randomised bit sequence. This signal is labelled as *proprietary*, since it is not covered by ETSI, ITU nor ANSI product standards.

A signal can be classified as a "Proprietary.PCM.HDB3.2M.SQ" signal if it is compliant with all clauses below.

NOTE: The signals covered here are only applicable to systems which are using *square shaped transmit pulses* and in case of *sending a randomised bit sequence*. Special bit sequences like AIS (Alarm Indication Signal) or others and other transmit pulse forms than described here can cause different signals. The way these characteristics are to be covered by specifications, are for further study.

### 10.13.1 Total signal power

To be compliant with this signal category, the mean signal power into a resistive load of 120  $\Omega$  shall not exceed a level of +13 dBm, measured within a frequency band from 100 Hz to 30 MHz.

NOTE: No ETSI deliverable does specify this parameter.

### 10.13.2 Peak amplitude

To be compliant with this signal category, the nominal peak amplitude of the largest signal into a resistive load of 120  $\Omega$  shall not exceed a level of 3,0 V  $\pm$  5 %. The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 10.13.3 Narrow band signal power

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance **R**, shall not exceed the limits given in table 63, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 38 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power **P** of a sending signal into a load resistance **R**, within a *power* bandwidth **B**. The measurement method of the NBSP is described in clause 13.2.

NOTE: No ETSI deliverable does specify this parameter.

Table 63: Break points of the narrow-band power limits

Centre frequency f	Impedance R	Signal Level P	Power bandwidth B	Spectral Power P/B	
10 kHz	120 $\Omega$	-40 dBm	100 Hz	-60 dBm/Hz	A
10 kHz	120 $\Omega$	-20 dBm	10 kHz	-60 dBm/Hz	
100 kHz	120 $\Omega$	-18 dBm	10 kHz	-58 dBm/Hz	
700 kHz	120 $\Omega$	-7 dBm	10 kHz	-47 dBm/Hz	
1,2 MHz	120 $\Omega$	-8 dBm	10 kHz	-48 dBm/Hz	
2 MHz	120 $\Omega$	-14 dBm	10 kHz	-54 dBm/Hz	
20 MHz	120 $\Omega$	-46 dBm	10 kHz	-86 dBm/Hz	
20 MHz	120 $\Omega$	-55 dBm	10 kHz	-95 dBm/Hz	
30 MHz	120 $\Omega$	-55 dBm	10 kHz	-95 dBm/Hz	
20 MHz	120 $\Omega$	-26 dBm	1 MHz	-86 dBm/Hz	B
30 MHz	120 $\Omega$	-35 dBm	1 MHz	-95 dBm/Hz	

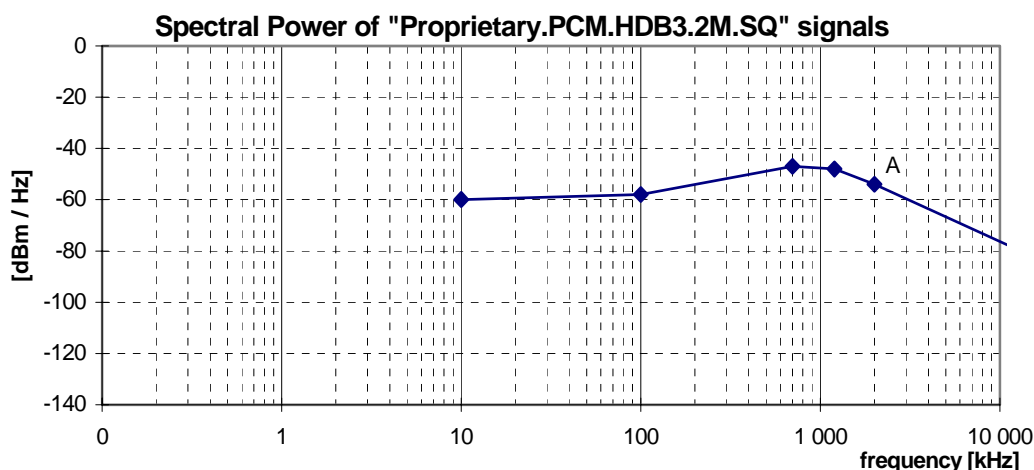


Figure 38: Spectral Power, for Proprietary.PCM.HDB3.2M.SQ signals, as specified in table 63

### 10.13.4 Unbalance about earth

To be compliant with this signal category, the LCL shall be better than 35 dB at 1 024 kHz.

NOTE: No ETSI deliverable does specify this parameter.

## 11 Cluster 4 signals (asymmetrical broad band)

This cluster summarizes asymmetrical signals that are generated by digital transmission equipment up to 8 Mbit/s, including ADSL. Asymmetrically means a bit rate in the downstream direction and a significantly lower bitrate (e.g. 25 %) in the upstream direction.

NOTE: Asymmetrical DSL systems generate different signals in different transmission directions. Reversal of their transmission direction, which means the injection of upstream signals into LT-ports and downstream signals into the NT-ports, will cause a substantial reduction of the maximum reach. Such a reduction is even significant for all asymmetrical DSL systems when only one such system is reversed. Therefore the classification of asymmetrical DSL systems is consequently split into upstream and downstream specifications.

## 11.1 "ADSL over POTS" signals (EC)

This category covers signals, generated by ADSL transmission equipment with spectrum overlap, i.e. for which the downstream overlaps the upstream. These signals may share the same wire pair with POTS signals.

This clause is based on ETSI, ANSI and ITU reports on ADSL equipment [10], [11] and [12]. A signal can be classified as an "ADSL over POTS" signal if it is compliant with all clauses below.

### 11.1.1 Total signal power (downstream only)

To be compliant with this signal category, the mean downstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +20,4 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

If measurements of the upstream power indicates that downstream power back-off is necessary, as described for the downstream PSD, then the maximum total transmit power shall be reduced accordingly.

Reference: TS 101 388 [10], clause 4.3.

Reference: ANSI T1.413 [11], clauses 6.15.1 and 6.15.3.

Reference: ITU-T Recommendation G.992.1 [12], clause A.1.2.3.1.

### 11.1.2 Total signal power (upstream only)

To be compliant with this signal category, the mean upstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +12,5 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

Reference: TS 101 388 [10], clause 4.3.

Reference: ANSI T1.413 [11], clauses 7.15.1 and 7.15.3.

Reference: ITU-T Recommendation G.992.1 [12], clause A.2.4.3.1.

### 11.1.3 Peak amplitude (upstream and downstream)

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 100  $\Omega$  shall not exceed a level of 19V (38 V peak-peak), measured within a frequency band from at least 100 Hz to 1 MHz. The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 11.1.4 Narrow-band signal power (downstream only)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 64, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 39 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: The NBSP specification in table 64 is reconstructed from the commonly used PSD specifications in [10], [11] and [12] (similar to figure 39), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall hold simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [10], [11] and [12], and includes the pass band ripple. The 100 kHz bandwidth values represent the "average PSD values" in the passband to smooth out the spectral ripple of 3,5 dB. The 1 MHz bandwidth specification is equivalent to the "sliding window" specification in [10], [11] and [12].


Reference: ANSI T1.413 [11], clause 6.14, reconstructed from PSD requirements.

Reference: ITU-T Recommendation G.992.1 [12], clause A.1.2 reconstructed from PSD requirements.

Table 64: Break points of the narrow-band power limits

Centre frequency f	Impedance R	Signal Level P	Power bandwidth B	Spectral Power P/B	
0,1 kHz	600 $\Omega$	-77,5 dBm	100 Hz	-97,5 dBm/Hz	A
1 kHz	600 $\Omega$	-77,5 dBm	100 Hz	-97,5 dBm/Hz	
1 kHz	600 $\Omega$	-67,5 dBm	1 kHz	-97,5 dBm/Hz	
4 kHz	600 $\Omega$	-67,5 dBm	1 kHz	-97,5 dBm/Hz	
4 kHz	100 $\Omega$	-52,5 dBm	10 kHz	-92,5 dBm/Hz	
25,875 kHz	100 $\Omega$	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
1 104 kHz	100 $\Omega$	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
3 093 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	B
30 000 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
60 kHz	100 $\Omega$	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
1 104 kHz	100 $\Omega$	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
3 093 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
3 093 kHz	100 $\Omega$	-30 dBm	1 MHz	-90 dBm/Hz	
4 545 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
30 000 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	

NOTE: The values for parameter  $P_{BO}$  are defined in table 65, and are dependent from the received upstream power (Power back-off).

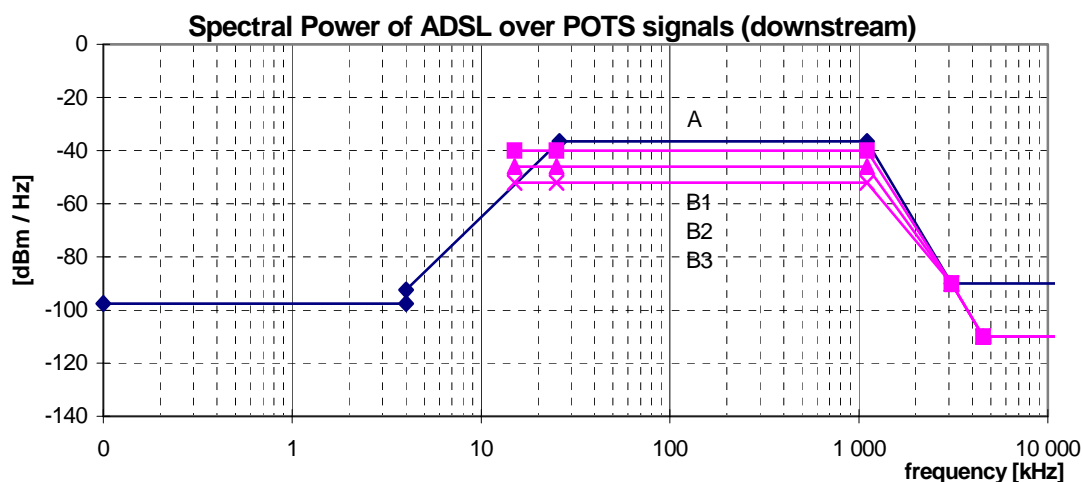

NOTE: The maximum spectral power varies with the value of parameter  $P_{BO}$ , as defined in table 65. Only the curves for the values  $P_{BO} = -40$  dBm/Hz,  $P_{BO} = -46$  dBm/Hz, and  $P_{BO} = -52$  dBm/Hz are shown here.

Figure 39: Spectral Power, for ADSL over POTS signals, as specified in table 64

**Power back-off.** To be compliant with this signal category, the maximum downstream signal power shall be reduced when the received upstream power is above specified levels. If the total received upstream power from 28,031 kHz to 79,781 kHz (ADSL sub-carriers 7-18) is greater than +3 dBm into 100  $\Omega$  then parameter  $P_{BO}$  shall not exceed the values shown in table 65. The received upstream power measurement shall be performed with an accuracy of  $\pm 1$  dB or better.

Reference: ANSI T1.413 [11], clause 9.4.6.

Reference: ITU-T Recommendation G.992.1 [12], clause A.3.1.

**Table 65: Definition of parameter  $P_{BO}$ , as used in table 64 (Power Back-off, or Power Cut-Back)**

Upstream received power [dBm]	< 3	< 4	< 5	< 6	< 7	< 8	< 9
Parameter $P_{BO}$ [dBm/Hz]	-40	-42	-44	-46	-48	-50	-52

### 11.1.5 Narrow-band signal power (upstream only)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 66, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 40 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: The NBSP specification in table 64 is reconstructed from the commonly used PSD specifications in [10], [11] and [12] (similar to figure 40), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall hold simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [10], [11] and [12], and includes the pass band ripple. The 100 kHz bandwidth values represent the "average PSD values" in the passband to smooth out the spectral ripple of 3,5 dB. The 1 MHz bandwidth specification is equivalent to the "sliding window" specification in [10], [11] and [12].

Reference: ANSI T1.413 [11], clause 7.14 reconstructed from PSD requirements.

Reference: ITU-T Recommendation G.992.1 [12], clause A.2.4 reconstructed from PSD requirements.

**Table 66: Break points of the narrow-band power limits**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
0,1 kHz	600 $\Omega$	-77,5 dBm	100 Hz	-97,5 dBm/Hz	A
1 kHz	600 $\Omega$	-77,5 dBm	100 Hz	-97,5 dBm/Hz	
1 kHz	600 $\Omega$	-67,5 dBm	1 kHz	-97,5 dBm/Hz	
4 kHz	600 $\Omega$	-67,5 dBm	1 kHz	-97,5 dBm/Hz	
4 kHz	100 $\Omega$	-52,5 dBm	10 kHz	-92,5 dBm/Hz	
25,875 kHz	100 $\Omega$	+5,5 dBm	10 kHz	-34,5 dBm/Hz	
138 kHz	100 $\Omega$	+5,5 dBm	10 kHz	-34,5 dBm/Hz	
307 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	B
30 000 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
60 kHz	100 $\Omega$	+12 dBm	100 kHz	-38 dBm/Hz	
138 kHz	100 $\Omega$	+12 dBm	100 kHz	-38 dBm/Hz	
307 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
1 221 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
1 221 kHz	100 $\Omega$	-30 dBm	1 MHz	-90 dBm/Hz	
1 630 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
30 000 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	

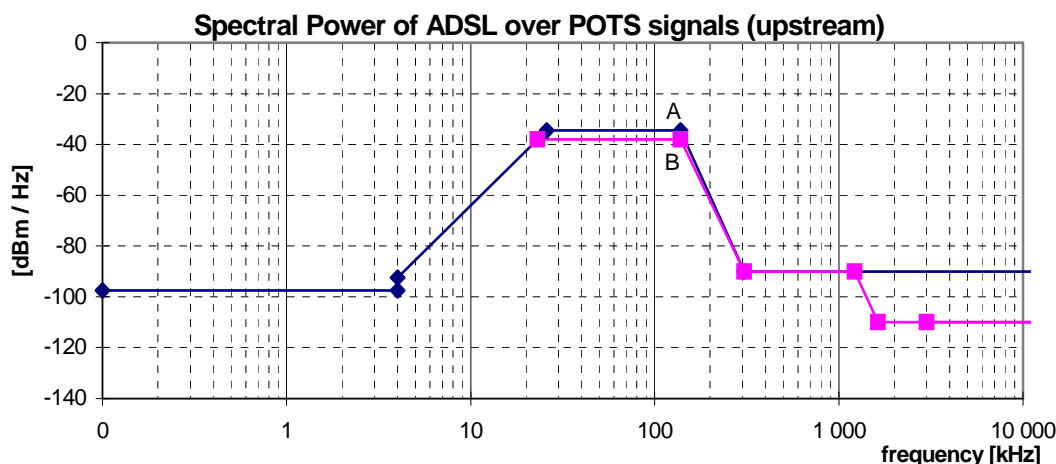


Figure 40: Spectral Power, for ADSL over POTS signals, as specified in table 66

### 11.1.6 Unbalance about earth (upstream and downstream)

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clause 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clause 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 100 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 67, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 41. The LCL values of the associated break frequencies of this figure are given in table 68. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss. To be compliant with this signal category, this requirement shall be met for both the switched-on and switched-off mode of the signal source.

Reference: ANSI T1.413 [11], clause 12.3.1 extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clauses 8.3.3 and E.3.2.

Table 67: Values for the LOV limits

	LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
downstream	-46 dBV	10 kHz	5,1 kHz	1 825 kHz	100 $\Omega$	150 nF
upstream	-46 dBV	10 kHz	5,1 kHz	210 kHz	100 $\Omega$	150 nF



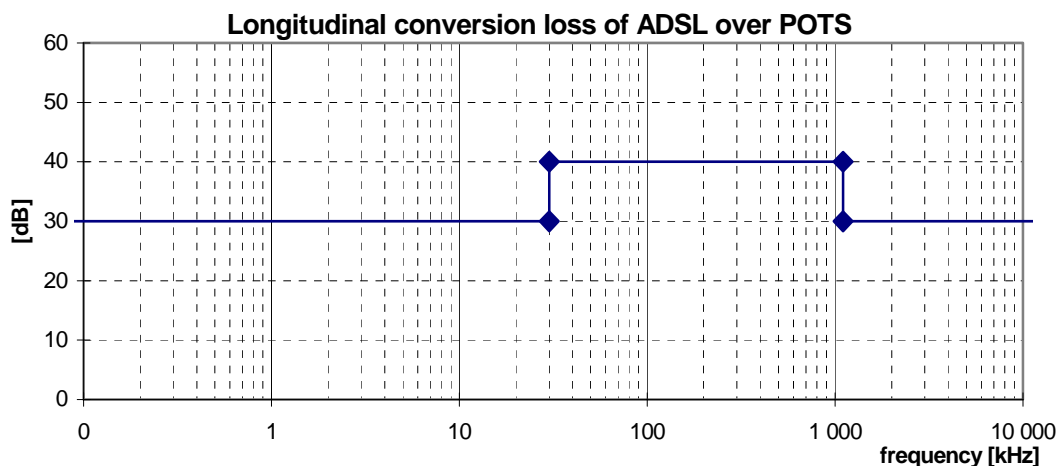


Figure 41: Minimum longitudinal conversion loss

Table 68: Frequencies and LCL values of the breakpoints of the LCL mask in figure 41

Frequency	LCL
< 30 kHz	30 dB
30 kHz	40 dB
1 104 kHz	40 dB
1 104 kHz	30 dB
30 MHz	30 dB

## 11.2 "ADSL.FDD over POTS" signals

This category covers signals, generated by ADSL transmission equipment, which uses Frequency Division Duplexing (FDD) to separate upstream and downstream. In this mode, the usable frequency band of downstream signals is narrower and not overlapping the upstream, but adjacent to it, to minimize self-NEXT. Therefore this signal is called ADSL "with reduced NEXT" in the ITU. Therefore both downstream and upstream of "ADSL.FDD over POTS" also fulfil the requirements of "ADSL over POTS" (EC) signals, as described in a previous clause of the present document.

These signals may share the same wire pair with POTS signals.

This clause is based on ETSI, ANSI and ITU reports on ADSL equipment [10], [11] and [12]. A signal can be classified as an "ADSL.FDD over POTS" signal if it is compliant with all clauses below.

### 11.2.1 Total signal power (downstream only)

To be compliant with this signal category, the mean downstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +19,9 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

If measurements of the upstream power indicates that downstream power back-off is necessary, as described for the downstream PSD, then the maximum total transmit power shall be reduced accordingly.

Reference: TS 101 388 [10], clause 4.3.

Reference: ANSI T1.413 [11], clauses 6.15.1 and 6.15.3.

Reference: ITU- T Recommendation G.992.1 [12], clause A.1.2.3.1.

### 11.2.2 Total signal power (upstream only)

The description of this signal characteristic equals that of "ADSL over POTS" (EC)

### 11.2.3 Peak amplitude (upstream and downstream)

The description of this signal characteristic equals that of "ADSL over POTS" (EC)

### 11.2.4 Narrow-band signal power (downstream only)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 69, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 42 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: The NBSP specification in table 69 is reconstructed from the commonly used PSD specifications in [10], [11] and [12] (similar to figure 42), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.


The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall hold simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [10], [11] and [12], and includes the pass band ripple. The 100 kHz bandwidth values represent the "average PSD values" in the passband to smooth out the spectral ripple of 3,5 dB. The 1 MHz bandwidth specification is equivalent to the "sliding window" specification in [10], [11] and [12].

Reference: ANSI T1.413 [11], clause 6.14, reconstructed from PSD requirements.

Reference: ITU-T Recommendation G.992.1 [12], clause A.1.2 reconstructed from PSD requirements.

**Table 69: Break points of the narrow-band power limits**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
0,1 kHz	600 $\Omega$	-77,5 dBm	100 Hz	-97,5 dBm/Hz	A
1 kHz	600 $\Omega$	-77,5 dBm	100 Hz	-97,5 dBm/Hz	
1 kHz	600 $\Omega$	-67,5 dBm	1 kHz	-97,5 dBm/Hz	
4 kHz	600 $\Omega$	-67,5 dBm	1 kHz	-97,5 dBm/Hz	
4 kHz	100 $\Omega$	-52,5 dBm	10 kHz	-92,5 dBm/Hz	
80 kHz	100 $\Omega$	-32,5 dBm	10 kHz	-72,5 dBm/Hz	
137,9 kHz	100 $\Omega$	-4,2 dBm	10 kHz	-44,2 dBm/Hz	
138 kHz	100 $\Omega$	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
1 104 kHz	100 $\Omega$	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
3 093 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	B
30 000 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
170 kHz	100 $\Omega$	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
1 104 kHz	100 $\Omega$	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
3 093 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
3 093 kHz	100 $\Omega$	-30 dBm	1 MHz	-90 dBm/Hz	
4 545 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
30 000 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
NOTE: The values for parameter $P_{BO}$ are defined in table 70, and are dependent from the received upstream power (Power back-off).					

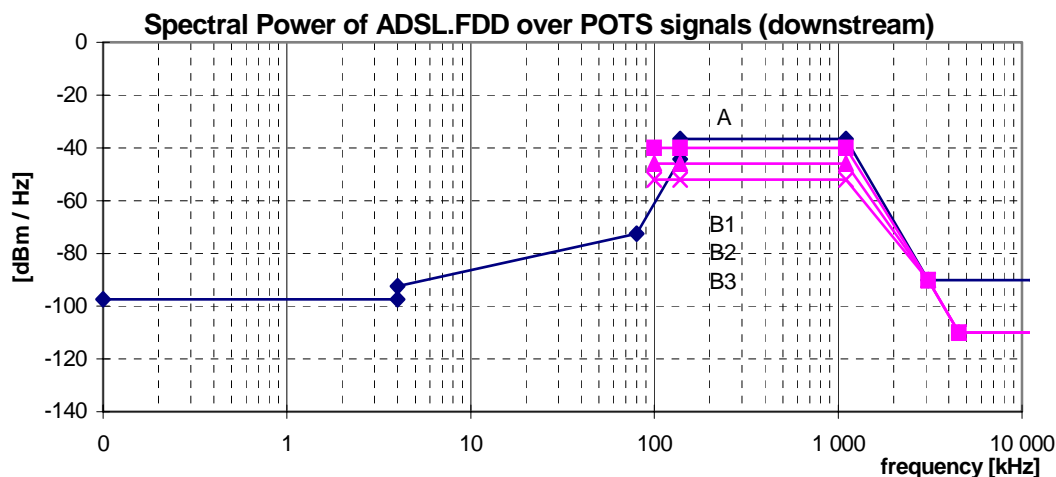

NOTE: The maximum spectral power varies with the value of parameter  $P_{BO}$ , as defined in table 70. Only the curves for the values  $P_{BO} = -40$  dBm/Hz,  $P_{BO} = -46$  dBm/Hz, and  $P_{BO} = -52$  dBm/Hz are shown here.

**Figure 42: Spectral Power, for ADSL.FDD over POTS signals, as specified in table 69**

**Power back-off.** To be compliant with this signal category, the maximum downstream signal power shall be reduced when the received upstream power is above specified levels. If the total received upstream power from 28,031 kHz to 79,781 kHz (ADSL sub-carriers 7-18) is greater than +3 dBm into 100  $\Omega$  then parameter  $P_{BO}$  shall not exceed the values shown in table 70. The received upstream power measurement shall be performed with an accuracy of  $\pm 1$  dB or better.

Reference: ANSI T1.413 [11], clause 9.4.6.

Reference: ITU-T Recommendation G.992.1 [12], clause A.3.1.

**Table 70: Definition of parameter  $P_{BO}$ , as used in table 69 (Power Back-off, or Power Cut-Back)**

Upstream received power [dBm]	< 3	< 4	< 5	< 6	< 7	< 8	< 9
Parameter $P_{BO}$ [dBm/Hz]	-40	-42	-44	-46	-48	-50	-52

### 11.2.5 Narrow-band signal power (upstream only)

The description of this signal characteristic equals that of "ADSL over POTS" (EC).

### 11.2.6 Unbalance about earth (upstream and downstream)

The description of this signal characteristic equals that of "ADSL over POTS" (EC).

## 11.3 "ADSL over ISDN" signals (EC)

This category covers signals, generated by ADSL transmission equipment with spectrum overlap, i.e. for which the downstream overlaps the upstream. These signals may share the same wire pair with ISDN signals.

This clause is based on ETSI and ITU reports on ADSL equipment [10] and [12]. A signal can be classified as an "ADSL over ISDN" signal if it is compliant with all clauses below.

### 11.3.1 Total signal power (downstream only)

To be compliant with this signal category, the mean downstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +19,9 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

If measurements of the upstream power indicates that downstream power back-off is necessary, as described for the downstream PSD, then the maximum total transmit power shall be reduced accordingly.

Reference: TS 101 388 [10], clause 4.3 and clause C.2.2.

### 11.3.2 Total signal power (upstream only)

To be compliant with this signal category, the mean upstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +13,3 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

Reference: TS 101 388 [10], clause 4.3 and clause C.3.3.

### 11.3.3 Peak amplitude (upstream and downstream)

To be compliant with this signal category, the nominal voltage peak of the largest signal pulse into a resistive load of 100  $\Omega$  shall not exceed a level of 19 V (38 V peak-peak), measured within a frequency band from at least 100 Hz to 1 MHz. The definition and measurement method of peak amplitude is specified in clause 13.1.

NOTE: No ETSI deliverable does specify this parameter.

### 11.3.4 Narrow-band signal power (downstream only)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 71, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 43 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a *power* bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Reference: TS 101 388 [10], clause 4.2.1.1, reconstructed from PSD requirements.

Reference: ITU-T Recommendation G.992.1 [12], clause B.1.3, reconstructed from PSD requirements.


NOTE: The NBSP specification in table 71 is reconstructed from the commonly used PSD specifications in [10] and [12] (similar to figure 43), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall hold simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [10] and [12], and includes the pass band ripple. The 100 kHz bandwidth values represent the "average PSD values" in the passband to smooth out the spectral ripple of 3,5 dB. The 1 MHz bandwidth specification is equivalent to the "sliding window" specification in [10] and [12].

Table 71: Break points of the narrow-band power limits

Centre Frequency f	Impedance R	Signal Level P	Power bandwidth B	Spectral Power P/B	
0,1 kHz	100 Ω	-70 dBm	100 Hz	-90 dBm/Hz	A
1 kHz	100 Ω	-70 dBm	100 Hz	-90 dBm/Hz	
1 kHz	100 Ω	-60 dBm	1 kHz	-90 dBm/Hz	
4 kHz	100 Ω	-60 dBm	1 kHz	-90 dBm/Hz	
4 kHz	100 Ω	-50 dBm	10 kHz	-90 dBm/Hz	
50 kHz	100 Ω	-50 dBm	10 kHz	-90 dBm/Hz	
80 kHz	100 Ω	-41,8 dBm	10 kHz	-81,8 dBm/Hz	
120 kHz	100 Ω	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
1 104 kHz	100 Ω	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
3 093 kHz	100 Ω	-50 dBm	10 kHz	-90 dBm/Hz	
11 040 kHz	100 Ω	-50 dBm	10 kHz	-90 dBm/Hz	B
30 000 kHz	100 Ω	-50 dBm	10 kHz	-90 dBm/Hz	
100 kHz	100 Ω	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
1 104 kHz	100 Ω	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
3 093 kHz	100 Ω	-40 dBm	100 kHz	-90 dBm/Hz	
3 093 kHz	100 Ω	-30 dBm	1 MHz	-90 dBm/Hz	
4 545 kHz	100 Ω	-50 dBm	1 MHz	-110 dBm/Hz	
30 000 kHz	100 Ω	-50 dBm	1 MHz	-110 dBm/Hz	

NOTE: The values for parameter  $P_{BO}$  are defined in table 72, and are dependent from the received upstream power (Power back-off).

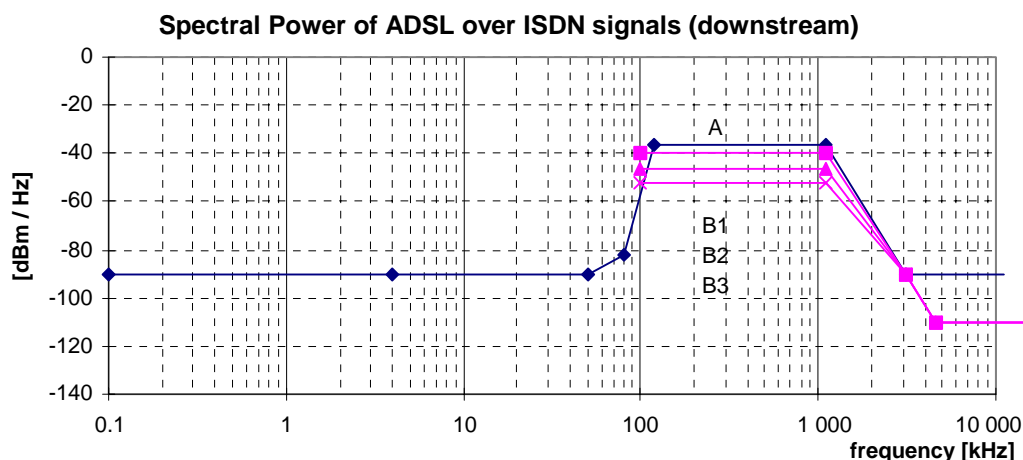

NOTE: The maximum spectral power varies with the value of parameter  $P_{BO}$ , as defined in table 72. Only the curves for the values  $P_{BO} = -40$  dBm/Hz,  $P_{BO} = -46$  dBm/Hz, and  $P_{BO} = -52$  dBm/Hz are shown here.

Figure 43: Spectral Power, for ADSL over ISDN signals, as specified in table 71

**Power back-off.** To be compliant with this signal category, the maximum downstream signal power shall be reduced when the received upstream power is above specified levels. If the total received upstream power from 170,34 kHz to 222,09 kHz (ADSL sub-carriers 40-51) is greater than 0 dBm into 100 Ω then parameter  $P_{BO}$  shall not exceed the values shown in table 72. The received upstream power measurement shall be performed with an accuracy of  $\pm 1$  dB or better.

Reference: TS 101 388 [10], clause C.4.17, (Uses subcarrier 40-51, values that have been adopted here).

Reference: ITU-T Recommendation G.992.1 [12], clause B.3.3 (Uses subcarrier 36-51, values that have been ignored here).

**Table 72: Definition of parameter  $P_{BO}$ , as used in table 71 (Power Back-off, or Power Cut-Back)**

Upstream received power (dBm)	< 0	< 1,5	< 3	< 4,5	< 6	< 7,5	< 9
Parameter $P_{BO}$	-40	-42	-44	-46	-48	-50	-52

### 11.3.5 Narrow-band signal power (upstream only)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 73, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 44 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

NOTE: The NBSP specification in table 73 is reconstructed from the commonly used PSD specifications in [10] and [12] (similar to figure 44), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall hold simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [10] and [12], and includes the pass band ripple. The 100 kHz bandwidth values represent the "average PSD values" in the passband to smooth out the spectral ripple of 3,5 dB. The 1 MHz bandwidth specification is equivalent to the "sliding window" specification in [10] and [12].

Reference: TS 101 388 [10], clause 4.2.1.2, reconstructed from PSD requirements.

Reference: ITU-T Recommendation G.992.1 [12], clause B.2.2 reconstructed from PSD requirements.

**Table 73: Break points of the narrow-band power limits**

Centre frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
0,1 kHz	100 $\Omega$	-70 dBm	100 Hz	-90 dBm/Hz	A
1 kHz	100 $\Omega$	-70 dBm	100 Hz	-90 dBm/Hz	
1 kHz	100 $\Omega$	-60 dBm	1 kHz	-90 dBm/Hz	
4 kHz	100 $\Omega$	-60 dBm	1 kHz	-90 dBm/Hz	
4 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
50 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
80 kHz	100 $\Omega$	-41,8 dBm	10 kHz	-81,8 dBm/Hz	
120 kHz	100 $\Omega$	+5,5 dBm	10 kHz	-34,5 dBm/Hz	
276 kHz	100 $\Omega$	+5,5 dBm	10 kHz	-34,5 dBm/Hz	
614 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
30 000 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
120 kHz	100 $\Omega$	+12 dBm	100 kHz	-38 dBm/Hz	B
276 kHz	100 $\Omega$	+12 dBm	100 kHz	-38 dBm/Hz	
614 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
1 221 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
1 221 kHz	100 $\Omega$	-30 dBm	1 MHz	-90 dBm/Hz	
1 630 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
30 000 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	

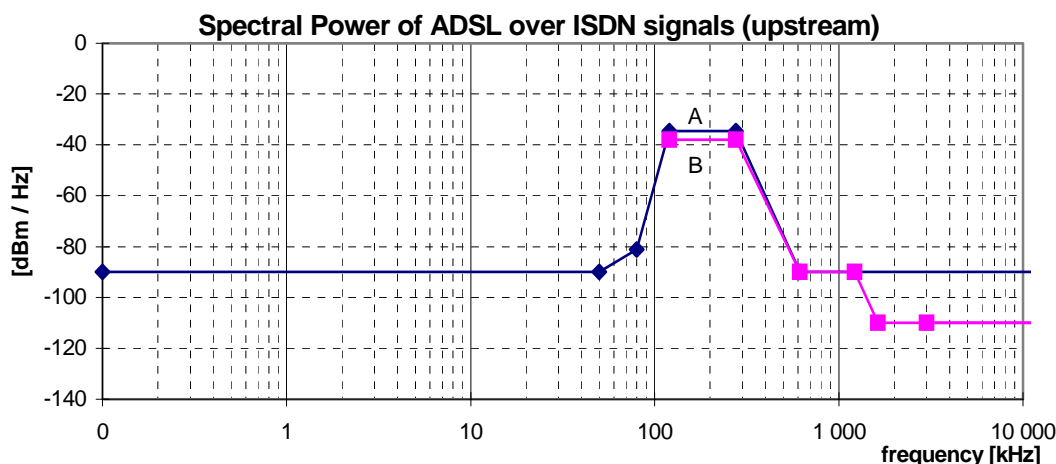


Figure 44: Spectral Power, for ADSL over ISDN signals, as specified in table 73

### 11.3.6 Unbalance about earth (upstream and downstream)

To be compliant with this signal category, the balance of the signal that may flow through the LT-port or NT-port shall exceed minimum requirements, under the condition that the local loop wiring and its termination is well balanced. This can be verified by a longitudinal output voltage (LOV) and a longitudinal conversion loss (LCL) measurement at the source of that signal, as specified in clause 13.3.2 and 13.3.3. The minimum LOV and LCL requirements hold for what can be observed at the ports of the Local Loop Wiring, when the Local Loop Wiring is replaced by an artificial impedance network described in clause 13.3.2 and 13.3.3.

The differential termination impedance for LOV and LCL measurements shall be chosen equally to the design impedance  $R_T = 100 \Omega$  of the Signal Source under test.

The observed LOV shall have an rms voltage of below the value specified in table 74, measured in a *power* bandwidth **B**, centred over any frequency in the range from  $f_{\min}$  to  $f_{\max}$ , and averaged in any one second period. Compliance with this limitation is required with a longitudinal terminating impedance having value  $Z_L(\omega) = R_L + 1/(j\omega \cdot C_L)$  for all frequencies between  $f_{\min}$  to  $f_{\max}$ . Clause 13.3.2 defines an example measurement method for longitudinal output voltage.

The observed LCL shall be higher than the lower limits given in figure 45. The LCL values of the associated break frequencies of this figure are given in table 75. Clause 13.3.3 defines an example measurement method for longitudinal conversion loss. To be compliant with this signal category, this requirement shall be met for both the switched-on and switched-off mode of the signal source.

Reference: ANSI T1.413 [11], clause 12.3.1 extended to 30 MHz according to [13].

Reference: TS 101 270-1 [13], clause 8.3.3 and E.3.2.

Table 74: Values for the LOV limits

	LOV	B	$f_{\min}$	$f_{\max}$	$R_L$	$C_L$
downstream	-46 dBV	10 kHz	5,1 kHz	1 825 kHz	100 $\Omega$	150 nF
upstream	-46 dBV	10 kHz	5,1 kHz	415 kHz	100 $\Omega$	150 nF

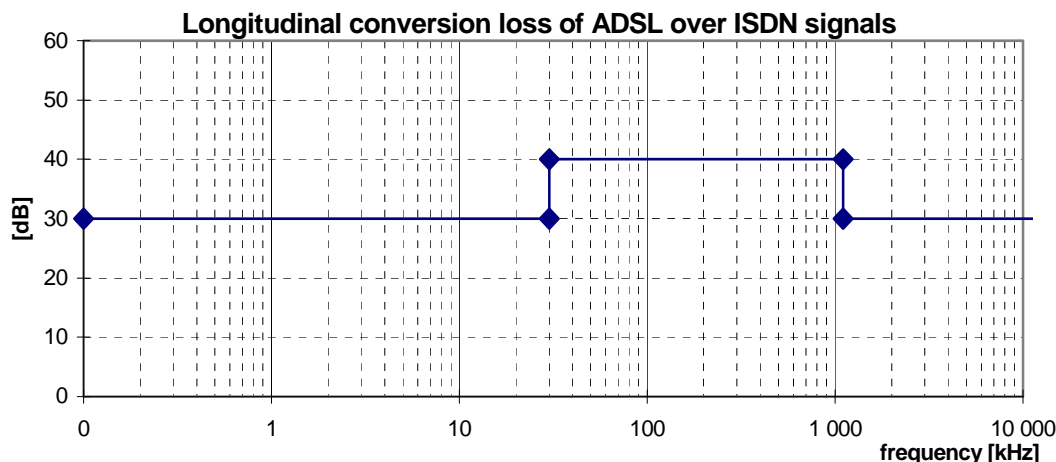


Figure 45: Minimum longitudinal conversion loss

Table 75: Frequencies and LCL values of the breakpoints of the LCL-mask in figure 45

Frequency	LCL
< 30 kHz	30 dB
30 kHz	40 dB
1 104 kHz	40 dB
1 104 kHz	30 dB
30 MHz	30 dB

## 11.4 "ADSL.FDD over ISDN" signals

This category covers signals, generated by ADSL transmission equipment which uses Frequency Division Duplexing (FDD) to separate upstream and downstream. In this mode, the usable frequency band of downstream signals is narrower to limit the overlap with the upstream to four DMT tones. This is to minimize self-NEXT. Therefore this signal is called ADSL "with reduced NEXT" in the ITU. Therefore both downstream and upstream of "ADSL.FDD over ISDN" also fulfil the requirements of "ADSL over ISDN" (EC) signals, as described in a previous clause of the present document.

These signals may share the same wire pair with ISDN signals.

This clause is based on ETSI and ITU reports on ADSL equipment [10] and [12]. A signal can be classified as an "ADSL.FDD over ISDN" signal if it is compliant with all clauses below.

### 11.4.1 Total signal power (downstream only)

To be compliant with this signal category, the mean downstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +19,3 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

If measurements of the upstream power indicates that downstream power back-off is necessary, as described for the downstream PSD, then the maximum total transmit power shall be reduced accordingly.

Reference: TS 101 388 [10], clause 4.3.

### 11.4.2 Total signal power (upstream only)

To be compliant with this signal category, the mean upstream signal power into a resistive load of 100  $\Omega$  shall not exceed a level of +13,3 dBm, measured within a frequency band from at least 4 kHz to 3 MHz.

Reference: TS 101 388 [10], clause 4.3.



### 11.4.3 Peak amplitude (upstream and downstream)

The description of this signal characteristic equals that of "ADSL over ISDN" (EC).

### 11.4.4 Narrow-band signal power (downstream only)

To be compliant with this signal category, the narrow-band signal power (NBSP) into a resistive load impedance  $R$ , shall not exceed the limits given in table 71, at any point in the frequency range 100 Hz to 30 MHz. This table specifies the break points of these limits. Limits for intermediate frequencies can be found by drawing a straight line between the break points on a logarithmic (Hz) - linear (dB) scale. Figure 43 illustrates the NBSP in a bandwidth-normalized way.

The NBSP is the average power  $P$  of a sending signal into a load resistance  $R$ , within a power bandwidth  $B$ . The measurement method of the NBSP is described in clause 13.2.

Reference: TS 101 388 [10], clause 4.2.2.1, reconstructed from PSD requirements.


Reference: ITU-T Recommendation G.992.1 [12], clause B.1.3, reconstructed from PSD requirements.

NOTE: The NBSP specification in table 76 is reconstructed from the commonly used PSD specifications in [10] and [12] (similar to figure 46), and used here since it is much wider applicable. This enables a unified specification method. PSD specifications are adequate when signals are purely random in nature, but cannot cover harmonic components in a signal (would cause infinite high "PSD" levels at these harmonic frequencies). NBSP specifications cover both signal types.

The NBSP specification of this signal category has been split into two overlapping limits. Both upper limits shall hold simultaneously. The 10 kHz bandwidth values represent the "maximum PSD values" from [10] and [12], and includes the pass band ripple. The 100 kHz bandwidth values represent the "average PSD values" in the passband to smooth out the spectral ripple of 3,5 dB. The 1 MHz bandwidth specification is equivalent to the "sliding window" specification in [10] and [12].

**Table 76: Break points of the narrow-band power limits**

Centre Frequency $f$	Impedance $R$	Signal Level $P$	Power bandwidth $B$	Spectral Power $P/B$	
0,1 kHz	100 $\Omega$	-70 dBm	100 Hz	-90 dBm/Hz	A
1 kHz	100 $\Omega$	-70 dBm	100 Hz	-90 dBm/Hz	
1 kHz	100 $\Omega$	-60 dBm	1 kHz	-90 dBm/Hz	
4 kHz	100 $\Omega$	-60 dBm	1 kHz	-90 dBm/Hz	
4 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
93,1 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
209 kHz	100 $\Omega$	-22 dBm	10 kHz	-62 dBm/Hz	
253,9 kHz	100 $\Omega$	-8,5 dBm	10 kHz	-48,5 dBm/Hz	
254 kHz	100 $\Omega$	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
1 104 kHz	100 $\Omega$	+3,5 dBm	10 kHz	-36,5 dBm/Hz	
3 093 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
11 040 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	B
30 000 kHz	100 $\Omega$	-50 dBm	10 kHz	-90 dBm/Hz	
276 kHz	100 $\Omega$	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
1 104 kHz	100 $\Omega$	$P_{BO} + 50$ dBm	100 kHz	$P_{BO}$ dBm/Hz	
3 093 kHz	100 $\Omega$	-40 dBm	100 kHz	-90 dBm/Hz	
3 093 kHz	100 $\Omega$	-30 dBm	1 MHz	-90 dBm/Hz	
4 545 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
30 000 kHz	100 $\Omega$	-50 dBm	1 MHz	-110 dBm/Hz	
NOTE: The values for parameter $P_{BO}$ are defined in table 77, and are dependent from the received upstream power (Power back-off).					

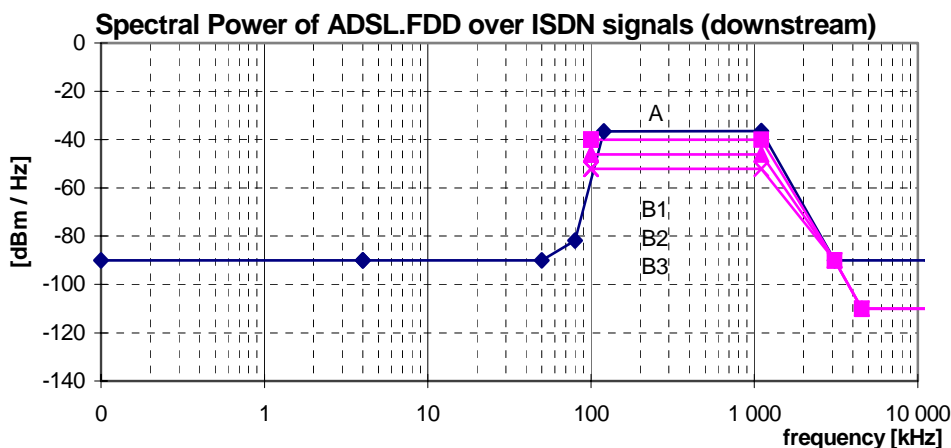

NOTE: The maximum spectral power varies with the value of parameter  $P_{BO}$ , as defined in table 77. Only the curves for the values  $P_{BO} = -40$  dBm/Hz,  $P_{BO} = -46$  dBm/Hz, and  $P_{BO} = -52$  dBm/Hz are shown here.

**Figure 46: Spectral Power, for ADSL.FDD over ISDN signals, as specified in table 76**

**Power back-off.** To be compliant with this signal category, the maximum downstream signal power shall be reduced when the received upstream power is above specified levels. If the total received upstream power from 170,34 kHz to 222,09 kHz (ADSL sub-carriers 40-51) is greater than 0 dBm into 100  $\Omega$  then parameter  $P_{BO}$  shall not exceed the values shown in table 77. The received upstream power measurement shall be performed with an accuracy of  $\pm 1$  dB or better.

Reference: TS 101 388 [10], clause C.4.17, (Uses subcarrier 40-51, values that have been adopted here).

Reference: ITU-T Recommendation G.992.1 [12], clause B.3.3 (Uses subcarrier 36-51, values that have been ignored here).

**Table 77: Definition of parameter  $P_{BO}$ , as used in table 76 (Power Back-off, or Power Cut-Back)**

Upstream received power (dBm)	< 0	< 1,5	< 3	< 4,5	< 6	< 7,5	< 9
Parameter $P_{BO}$	-40	-42	-44	-46	-48	-50	-52

#### 11.4.5 Narrow-band signal power (upstream only)

The description of this signal characteristic equals that of "ADSL over ISDN" (EC).

#### 11.4.6 Unbalance about earth (upstream and downstream)

The description of this signal characteristic equals that of "ADSL over ISDN" (EC).

### 11.5 Other members of the ADSL family

Other members of the ADSL family have recently been defined by ITU-T Recommendation G.992.3, annexes I and J, and referred to by ETSI in annex E of [10]. A complete spectral management description of the signals generated by these members is currently not available.

The description of these signals, and how these descriptions will be organized and labelled in the present document, are for further study. A possible way of organizing these descriptions is summarized below.

#### 11.5.1 ADL derived from "ADSL over POTS" signals

These descriptions are for further study.

## 11.5.2 ADL derived from "ADSL over ISDN" signals

These descriptions are for further study.

# 12 Cluster 5 signals (broadband up to 30 MHz)

## 12.1 "VDSL" Signals

NOTE: The signals that will be generated by VDSL equipment are currently under study, within the ETSI-TM6 [13] and ANSI T1E1.4 VDSL projects [14]. When that study has been completed, the description of the agreed signal will be included here.

# 13 Measurement methods of signal parameters

## 13.1 Peak amplitude

The peak amplitude is defined as the peak voltage amplitude measured in a continuous sending signal such that the probability of exceeding that amplitude is less than  $10^{-7}$ . It shall be measured into a resistive load **R**, and over a period of not less than 120 s. The bandwidth **B** of the measuring instrument shall be as defined in the specification for peak amplitude for the signal under test.

The measurement period of at least 120 s is required to generate a peak amplitude to better than  $10^{-7}$  probability for all known DSL types except DMT ADSL. DMT's combination of near-Gaussian distribution and low symbol rate would force a measurement period on the order of 42 minutes to generate  $10^7$  symbols - however, 120 s will generate a peak measurement on the order of 90 % of the  $10^{-7}$  peak.

## 13.2 Narrow-band signal power (voltage)

The narrow band signal power is defined as the average power **P** of a sending signal into a resistive load **R**, within a *power* bandwidth **B** centred at a specified frequency. The power bandwidth is different from the commonly used -3 dB bandwidth, since it fully accounts for the shape of the transfer function  $H(f)$  of frequency selective filters while measuring narrow band power (or rms-voltage). The power bandwidth of a frequency selective filter is defined as shown below.

$$B_{power} = \frac{1}{|H_{max}|^2} \int |H(f)|^2 \cdot df$$

## 13.3 Unbalance about earth

Poor balance of a signal source, connected to a local loop wiring, leads to conditions in the network where systems using the same cable could be harmed. If the combination of system and wire pair shows a poor balance about earth, this will result in unwanted radiated emissions (egress) which will be visible in the environment of the wire pair and which also will be received by adjacent wire pairs (crosstalk).

### 13.3.1 Definition of earth

Measurements of both LOV and LCL must be considered as 3 terminal measurements. These terminals are the conductors of a port to the Local Loop Wiring or to a signal source (ESS, CSS or RSS). Two terminals are those of the differential mode and the third terminal is that of the earth used of the common mode.

- In the case of a signal source that is connected to a local earth point, then the measurement equipment should be connected to the same earth point. The earth point of the measurement equipment should be taken from a point close to the measurement port of the equipment. The connection to the earth point of the signal source should be of low impedance.
- In the case of a signal source that has no reference to earth, then that source must be placed centrally on an earthed copper or similar high conductivity metal plate of dimension greater than twice the area of the minimum rectangle bounding the perimeter of the signal source. The earth point of the measurement equipment should be taken from a point close to the measurement port of the equipment. The connection to the metal plane should be of low impedance.

### 13.3.2 Transmitter Balance - LOV

The balance of transmitters is normally expressed in the "Longitudinal Output Voltage" (LOV). This is the common mode portion of the generated signal, and specified for many transmission systems defined by ETSI TM6 (e.g. see [6] and [7]).


The longitudinal output voltage is the longitudinal component of the output signal that occurs on the line interface (ports of the local loop wiring). The definition of the LOV can be found in the ITU-T Recommendation G.117 [16].

Figure 47 gives an example measurement method for longitudinal output voltage. Further examples can be derived from [15] and [16]. For direct use of this test configuration, the IUT should be able to generate a signal in the absence of a signal from the far end. The ground reference for these measurements shall be the building ground.

NOTE 1: During regenerator test (where required) each wire on the side which is not under test has to be connected to ground by a terminating impedance having the value of  $R_T/2$  in series with a capacitance of at least 330 nF.

References: ITU-T Recommendation O.9 [15].

References: ITU-T Recommendation G.117 [16].

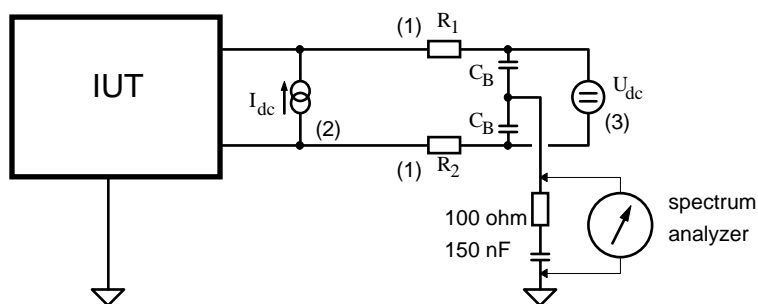

NOTE 1: The remarks below apply to figure 47:

(1) These resistors have to be matched:  $R_1 = R_2 = R_T/2$  and  $R_1/R_2 = 1 \pm 0,1 \%$ .

(2) For LTU test only if remote power feeding is supplied.

(3) For NTU test only if remote power feeding is required DC blocking capacitors =  $C_B$ .

NOTE 2: The value of the components  $C_B$  is to be considered carefully for the frequency range and design impedance the measuring adapter is used for. At low frequencies other measurement methods could be more appropriate.

**Figure 47: Measurement method for longitudinal output voltage (LOV)**

### 13.3.3 Receiver balance - LCL

The balance of receivers is normally expressed in the "Longitudinal Conversion Loss" (LCL). The definition of the LCL can be found in [15]. Additionally, LCL is specified for all transmission systems defined by ETSI TM6 (e.g. see [6] and [7]).


The (LCL) longitudinal conversion loss is given by:  $LCL = 20 \log(e_l/e_m)$  [dB] where  $e_l$  is the applied longitudinal voltage referenced to the building ground and  $e_m$  is the resultant metallic voltage appearing across a termination with the impedance as given in the relevant clause (see figure 48).

Figure 48 defines an example of the measurement method for the longitudinal conversion loss (LCL). The LCL is given by:

$$LCL = 20 \log(e_l/e_m) \text{ [dB]}$$

where  $e_l$  is the applied longitudinal voltage referenced to the building ground and  $e_m$  is the resultant metallic voltage appearing across a defined termination. Measurement should be performed with the IUT powered up but inactive (no transmit signal).

References: ITU-T Recommendation O.9 [15].

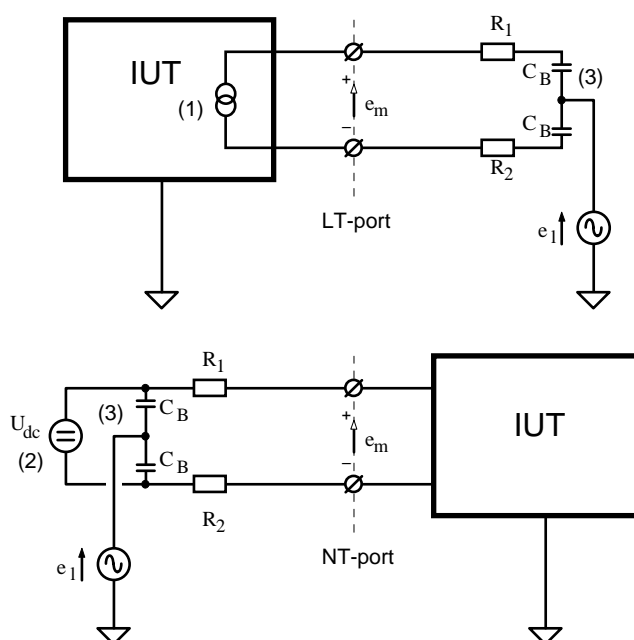

NOTE 1: The remarks below apply to figure 48:

- (1) For LT test only if remote powering is supplied.
- (2) For NT test only if remote powering is required. The power supply shall have at least an impedance of  $10 \times (R_1 + R_2)$  for the test frequencies of the LCL.
- (3) DC blocking capacitors =  $C_B$ .

NOTE 2: The value of the components  $C_B$  is to be considered carefully for the frequency range and design impedance the measuring adapter is used for. At low frequencies other measurement methods could be more appropriate.

**Figure 48: Measurement method for longitudinal conversion loss**

---

## Annex A: Bibliography

### ACCESS CABLES

- ETSI-TM6(97)02: "Cable reference models for simulating metallic access networks", R.F.M. van den Brink, ETSI-TM6, Permanent document TM6(97)02, revision 3, Luleå, Sweden, June 1998 (970p02r3).

### ADSL

- ITU-T Recommendation G.992.2 (1999): "Splitterless asymmetric digital subscriber line (ADSL) transceivers".

### EMC & UNBALANCE

- ETSI EN 300 386-2 (V1.1.3): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Telecommunication network equipment; ElectroMagnetic Compatibility (EMC) requirements; Part 2: Product family standard".

---

## History

<b>Document history</b>		
V1.1.1	September 2000	Publication
V1.2.1	August 2001	Publication
V1.3.1	December 2002	Publication